PASTERNACK®
www.pasternack.com



2.92mm Male to 2.4mm Male Precision Cable Using 095 Series Coax, RoHS

TECHNICAL DATA SHEET PE35606

2.92mm Male to 2.4mm Male Precision Cable Using 095 Series Coax, RoHS

Configuration

Connector 1	2.92mm Male
Connector 2	2.4mm Male
Cable Type	095 Series

Electrical Specifications

Frequency Range, GHz	DC to 40
Impedance, Ohms	50
Maximum VSWR	1.4:1
Velocity of Propagation, %	69.5
RF Shielding, dB	90
Maximum Operating Voltage, Vrms	1,200
Electrical Specification Notes:	Short lengths up to 24” long may exhibit VSWR measurements up to 9% higher.

Mechanical Specifications

Cable Assembly

Cable Type	095 Series

Temperature

Temperature Operating Range, deg C	-48 to +204
One Time Minimum Bend Radius, in [mm]	1 [25.4]

Cable

Center Conductor Type	Solid
Cable Inner Conductor	Copper Clad Steel, Silver
No of Shields	2
Dielectric Type	PTFE
Jacket Material	FEP
Jacket Diameter, in [mm]	0.095 [2.41]

Connector 1

Type	2.92mm Male
Configuration	Straight
Inner Conductor Material and Plating	Brass, Gold
Coupling Nut Material and Plating	Passivated Stainless Steel
Hex Size, in.	5/16
Torque, in-lbs [Nm]	8 [0.9]
Body Material and Plating	Passivated Stainless Steel
Dielectric Type	Noryl

Click the following link (or enter part number in “SEARCH” on website) to obtain additional part information including price, inventory and certifications: 2.92mm Male to 2.4mm Male Precision Cable Using 095 Series Coax, RoHS PE35606

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.

Pasternack Enterprises, Inc. • P.O. Box 16759, Irvine, CA 92623
Phone: (866) 727-8376 or (949) 261-1920 • **Fax:** (949) 261-7451
Sales@Pasternack.com • Techsupport@Pasternack.com

ISO 9001 : 2008 Registered

© 2013 Pasternack Enterprises All Rights Reserved

PASTERNACK®
www.pasternack.com



2.92mm Male to 2.4mm Male Precision Cable Using 095 Series Coax, RoHS

TECHNICAL DATA SHEET PE35606

Connector 2

Type	2.4mm Male
Configuration	Straight
Inner Conductor Material and Plating	Brass, Gold
Coupling Nut Material and Plating	Passivated Stainless Steel
Hex Size, in.	5/16
Torque, in-lbs [Nm]	8 [0.9]
Body Material and Plating	Passivated Stainless Steel
Dielectric Type	Noryl

Compliance Certifications (visit www.Pasternack.com for current document)

RoHS Compliant	Yes

Plotted and Other Data

Notes:	Values at 25 °C, sea level

2.92mm Male to 2.4mm Male Precision Cable Using 095 Series Coax, RoHS from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and fiber optic products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in “SEARCH” on website) to obtain additional part information including price, inventory and certifications: 2.92mm Male to 2.4mm Male Precision Cable Using 095 Series Coax, RoHS PE35606

URL: http://www.pasternack.com/2.92mm-male-2.4mm-male-095-series-cable-assembly-pe35606-p.aspx

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.

Pasternack Enterprises, Inc. • P.O. Box 16759, Irvine, CA 92623
Phone: (866) 727-8376 or (949) 261-1920 • **Fax:** (949) 261-7451
Sales@Pasternack.com • Techsupport@Pasternack.com


ISO 9001 : 2008 Registered

© 2013 Pasternack Enterprises All Rights Reserved

© 2013 Pasternack Enterprises All Rights Reserved

PE35606 CAD Drawing

2.92mm Male to 2.4mm Male Precision Cable Using 095 Series Coax, RoHS

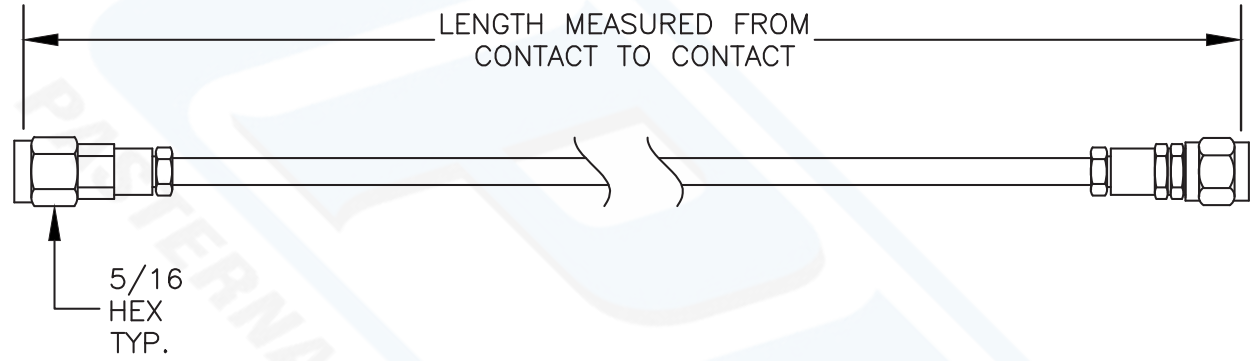

How To Order

Part Number Configuration

PE3 [zzz] [yy] - [xx] [uu]

- zzz: 00 - 99999
- yy: LF = RoHS Compliant; < Blank > = Standard
- xx: Length
- uu: CM = Centimeters; < Blank > = Inches

Note: LF applies only to RF cables

Examples

- PE3000LF-100
- PE3000-100
- PE3000LF-100CM
- PE3000-100CM

Part # Ext.	Length In Inches	Part # Ext.	Length In Centimeters
-12	12"	-25CM	25Cm
-24	24"	-50CM	50Cm
-36	36"	-75CM	75Cm
-48	48"	-100CM	100Cm
-60	60"	-125CM	125Cm
-xx	Custom Length	-xxCM	Custom Length

PASTERNACK®
Pasternack Enterprises, Inc.
P.O. Box 16759 | Irvine | CA | 92623
Phone: (949) 261-1920 | **Fax:** (949) 261-7451
Website: www.pasternack.com | **E-Mail:** sales@pasternack.com

DWG TITLE

PE35606

NOTES:
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.
3. DIMENSIONS ARE IN INCHES [mm].
4. LENGTH TOLERANCE IS ± 1.5% OR 3/8", WHICHEVER IS GREATER.

FSCM NO. 53919	CAD FILE 120611	SCALE N/A	SIZE A	2233