

Disc Type Capacitors with Lead (High Voltage Ceramic Capacitors)


CS65-B2GA101KAGKA







Applications	Automotive Grade
Feature	Mid Mid Voltage (100 to 630V)
	Safety Safety Standard Approved
	Halogen-free Halogen-free
	AEC-Q200 AEC-Q200
Series	CS
Status	Production



Size	
Diameter(D)	7.00mm Max.
Thickness(T)	7.00mm Max.
Lead Gap(F)	7.50mm ±1.50mm
Lead Diameter(d)	0.60mm ±0.05mm

Electrical Characteristics		
Capacitance	100pF ±10%	
Rated Voltage	400VAC	
Withstanding Voltage	2.6kVAC	
Temperature Characteristic	B(±10%)	
Dissipation Factor (Max.)	2.5%	
Insulation Resistance (Min.)	10000ΜΩ	

	Other	
Coldoring Method	Wave (Flow)	
Soldering Method	Iron Soldering	
Lead Length / Package Type	25mm for Bulk	
AEC-Q200	Yes	
Package Quantity	1000pcs	

[!] Images are for reference only and show exemplary products. ! This PDF document was created based on the data listed on the TDK Corporation website.

[!] All specifications are subject to change without notice.

Disc Type Capacitors with Lead (High Voltage Ceramic Capacitors)


CS65-B2GA101KAGKA









Characteristic Graphs(This is reference data, and does not guarantee the products characteristics.)

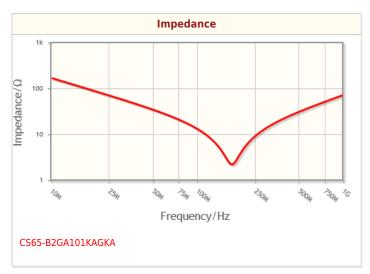

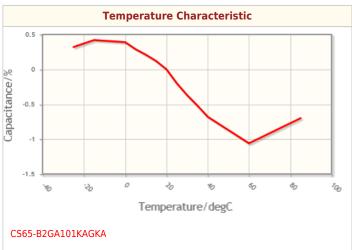

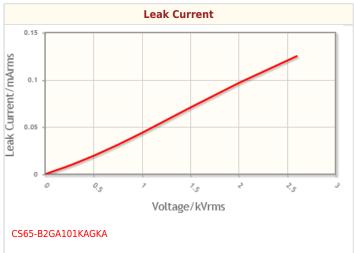

 $^{!\ \}mbox{Images}$ are for reference only and show exemplary products.

[!] This PDF document was created based on the data listed on the TDK Corporation website.

[!] All specifications are subject to change without notice.