


Specifications

Parameter	Unit	Minimum	Typical	Maximum
Center Frequency	MHz	133.5	133.6	133.7
Insertion Loss	dB	-	23.3	27
1 dB Bandwidth	MHz	-	1.85	-
3 dB Bandwidth	MHz	1.95	2.03	2.05
35 dB Bandwidth	MHz	-	2.7	2.8
40 dB Bandwidth	MHz	-	2.76	-
45 dB Bandwidth	MHz	-	2.82	3.2
50 dB Bandwidth	MHz	-	2.88	4
55 dB Bandwidth	MHz	-	2.94	12
Passband Variation	dB	-	0.4	1
Absolute Delay	usec	-	3.88	4
Ultimate Rejection(f0±12MHz)	dB	55	64	-
Material Temperature coefficient	KHz/°C	0.1336		
Ambient Temperature	°C	25		
Package Size	DIP3512(35.0x12.8x4.7mm3)			

Notes:

1. All specifications are based on the test circuit shown
2. In production, devices will be tested at room temperature to a guardbanded specification to ensure electrical compliance over temperature
3. Electrical margin has been built into the design to account for the variations due to temperature drift and manufacturing tolerances
4. This is the optimum impedance in order to achieve the performance show

Matching Configuration

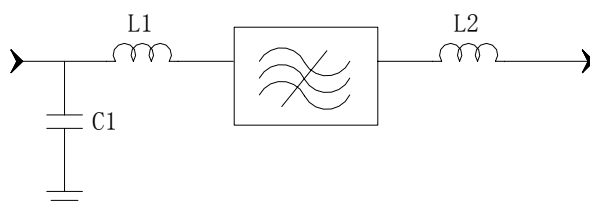

L1=56nH L2=47nH


C1=56pF

Source /Load Impedance=50 ohm

Notes - Component values may change depending
on board layout.

	SIPAT Co., Ltd. (CETC No. 26 Research Institute) Nanping Huayuan Road No. 14 Chongqing, China, 400060	Part Number	LBS13403	
		Rev. Date	2006-3-13	
		Rev.	1.0	Page 1/3

Package Dimension

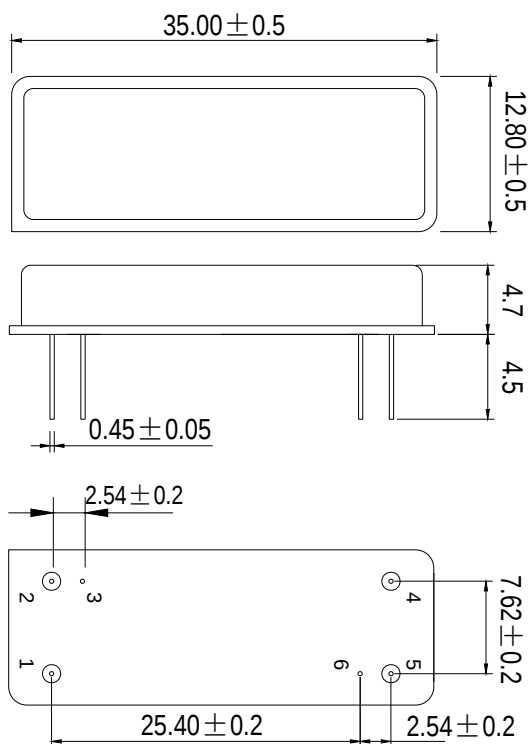


Input:1
Output:5


	SIPAT Co., Ltd. (CETC No. 26 Research Institute) Nanping Huayuan Road No. 14 Chongqing, China, 400060		Part Number		LBS13403	
			Rev. Date		2006-3-13	
			Rev.		1.0	Page 2/3

Typical Performance


Frequency Respond

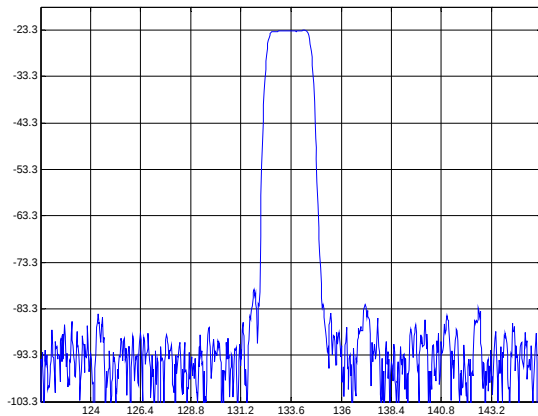


Passband Respond

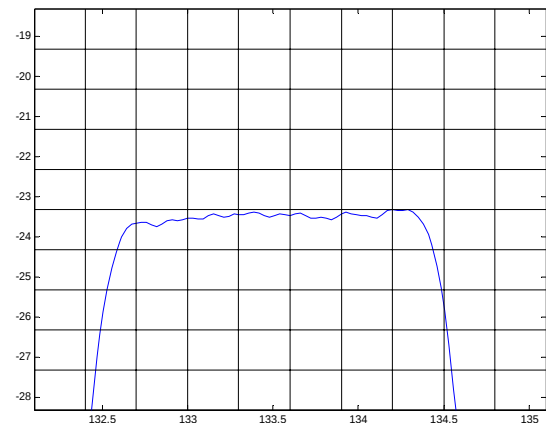


Group Delay Variation($f_0 \pm 0.9\text{MHz}$)

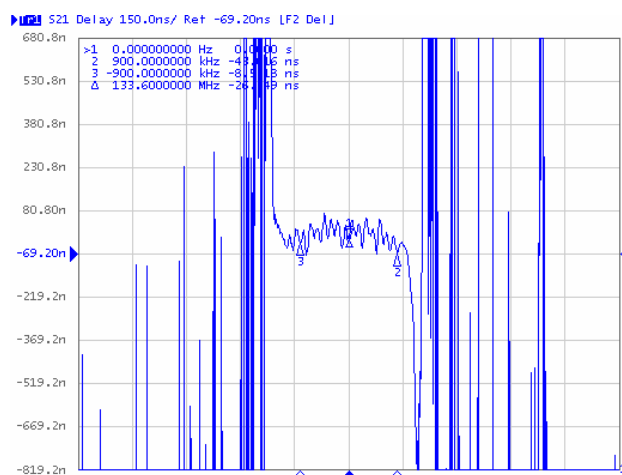


Phase Linearity($f_0 \pm 0.9\text{MHz}$)

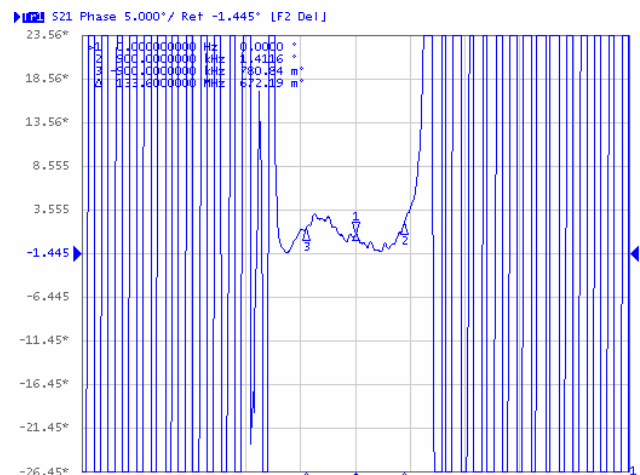

Smith Chart S11

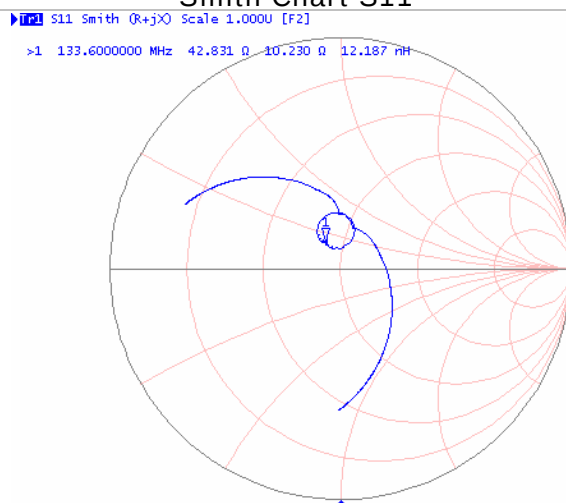

Smith Chart S22

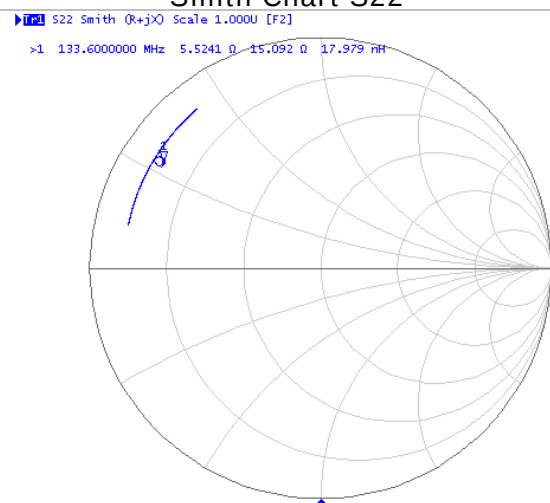

SIPAT Co., Ltd.
(CETC No. 26 Research Institute)
Nanping Huayuan Road No. 14
Chongqing, China, 400060

Part Number	LBS13403	
Rev. Date	2006-3-13	
Rev.	1.0	Page 3/3