

Features

- ◆ SPDT and SP3T Series Diode Designs
- ◆ Low Intermodulation Distortion, 80 dBc
- ◆ High Average Power, 100 W
- ◆ Wide Bandwidth, 10 MHz to 1000 MHz
- ◆ Low Insertion Loss
- ◆ High Isolation
- ◆ RoHS Compliant


Description and Applications

M/A-COM Technology Solutions MA8334 Series of multi-throw high power switch modules are SPDT and SP3T devices intended for use from 10 MHz to 1000 MHz. They are designed to function with an input power of 100 watts, CW, into a 50 Ω load with a nominal source VSWR of 1.3:1. These switch modules are constructed using advanced hybrid technology and utilize PIN diode chips that have been optimized for low loss and high reliability. These switch modules make use of M/A-COM Tech's, high voltage, CERMACHIP™ PIN diode chip distinguished by its low thermal resistance and low intermodulation distortion. Applications for the MA8334 switch modules include 100W incident power T/R antenna and diversity switches. Typical bias conditions for nominal switch operation are +50mA @ +1V for the low loss condition and -100V @ 0 mA for isolation.


Absolute Maximum Ratings ¹

| Parameter | Absolute Maximum |
|-----------------------|--|
| Reverse Voltage | Voltage Rating per Diode |
| Forward Current | + 250 mA per diode |
| Operating Temperature | -65 °C to +125 °C |
| Storage Temperature | -65 °C to +150 °C |
| Junction Temperature | +175 °C |
| Power Dissipation | 5 W @ + 25 °C . derated to 0 W @ + 125 °C . |

1. Operation of this device above any one of these parameters may cause permanent damage.

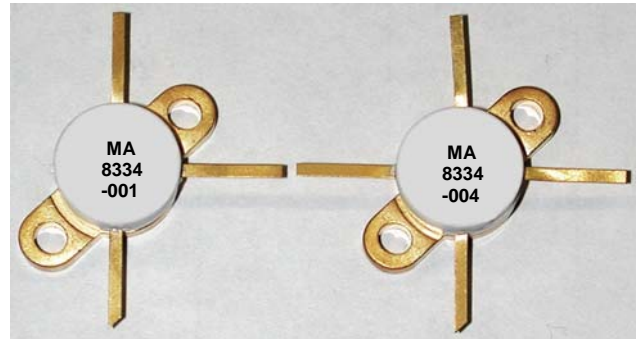


Circuit for Common Cathode Biasing

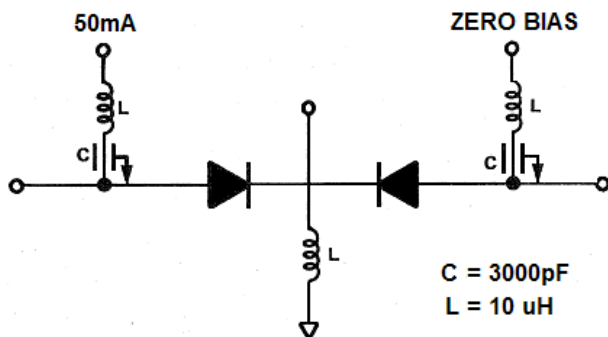

Suggested Bias Circuit for MA8334-001

Recommended D.C. Bias :
Low Loss: +50 mA @+ 1V, Isolation:-100V @ 0mA

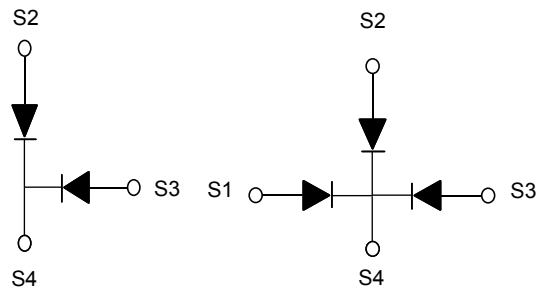

Internal Wiring Diagram

1

ADVANCED: Data Sheets contain information regarding a product M/A-COM Technology Solutions is considering for development. Performance is based on target specifications, simulated results, and/or prototype measurements. Commitment to develop is not guaranteed.
PRELIMINARY: Data Sheets contain information regarding a product M/A-COM Technology Solutions has under development. Performance is based on engineering tests. Specifications are typical. Mechanical outline has been fixed. Engineering samples and/or test data may be available. Commitment to produce in volume is not guaranteed.

• **North America** Tel: 800.366.2266 • **Europe** Tel: +353.21.244.6400
• **India** Tel: +91.80.43537383 • **China** Tel: +86.21.2407.1588
Visit www.macomtech.com for additional data sheets and product information.

M/A-COM Technology Solutions Inc. and its affiliates reserve the right to make changes to the product(s) or information contained herein without notice.

MA8334 Series



High Power Multi-Throw PIN Diode Switch Modules

V5


Specifications @ T_A=+25°C

| Model Number | Case Style | Maximum ³ CW Input Power (Watts) | Switch Type | Frequency Range (MHz) | Minimum Isolation ^{1,2} (dB) | Maximum Insertion Loss ^{1,2} (dB) | Nominal Carrier Lifetime ⁴ TL (μS) | Diode Voltage Rating (Volts) |
|--------------|------------|---|-------------|-----------------------|---------------------------------------|--|---|------------------------------|
| MA8334-001 | 844-001 | 100 | SPDT | 10-1000 | 24 | 0.35 | 8 | 900 |
| MA8334-004 | 844-004 | 100 | SP3T | 10-1000 | 24 | 0.35 | 8 | 900 |

Performance Notes:

- 1) For the MA8334-001 and the MA8334-004 switches, the small signal insertion loss and isolation measurements are performed at 450 MHz with the "ON" port forward biased @ +50mA, +1V and the "OFF" port reverse biased at 0V, 0mA. For (100W) high signal conditions, the "ON" port is forward biased @ +50mA, +1V and the "OFF" port is reverse biased at -100V, 0mA.
- 2) Maximum small signal VSWR for all switches is 1.35:1 with source and load VSWR < 1.05 :1 in 50 Ω system at 450 MHz
- 3) Nominal thermal resistance for each diode is 20°C/W.
- 4) Bias conditions +10mA/-6mA


Performance Data

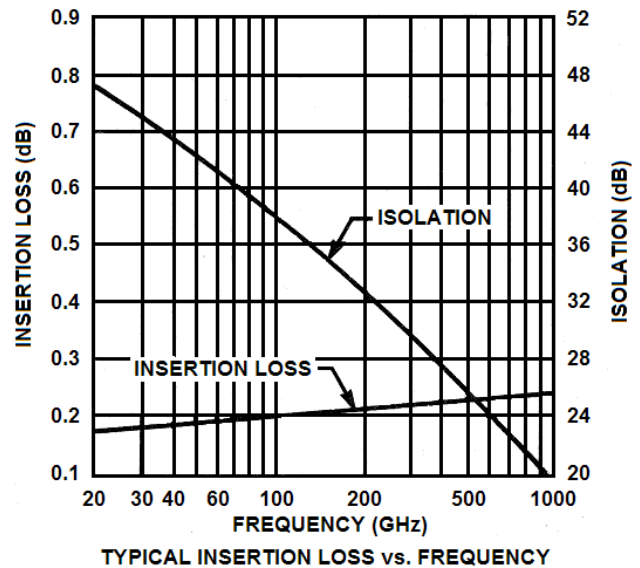

Note: Specifications subject to change without notification

Case Dimensions


Case style 844-001

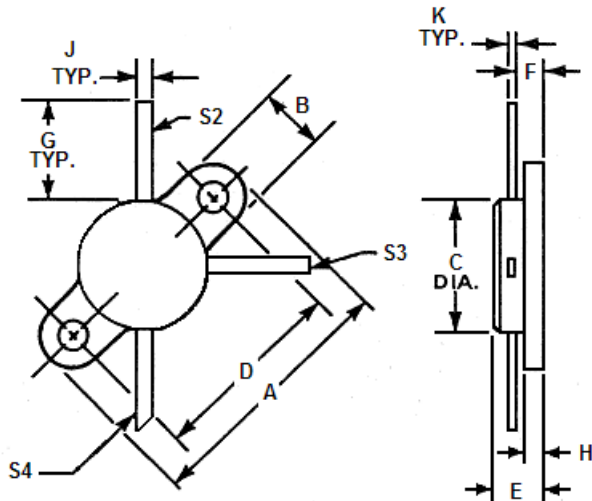

| DIM. | INCHES | | MM | |
|------|--------|------|------|------|
| | MIN. | MAX. | MIN. | MAX. |
| A | .970 | .980 | 24.6 | 24.9 |
| B | .245 | .255 | 6.22 | 6.48 |
| C | .485 | .495 | 12.3 | 12.6 |
| D | .720 | .730 | 18.3 | 18.5 |
| E | .250 | .292 | 6.35 | 7.42 |
| F | .155 | .182 | 3.94 | 4.62 |
| G | .400 | .420 | 10.2 | 10.7 |
| H | .090 | .110 | 2.29 | 2.79 |
| J | .045 | .055 | 1.14 | 1.40 |
| K | .005 | .007 | .127 | .178 |

Mounting holes are 0.118 +/- .010 mil

Case style 844-004

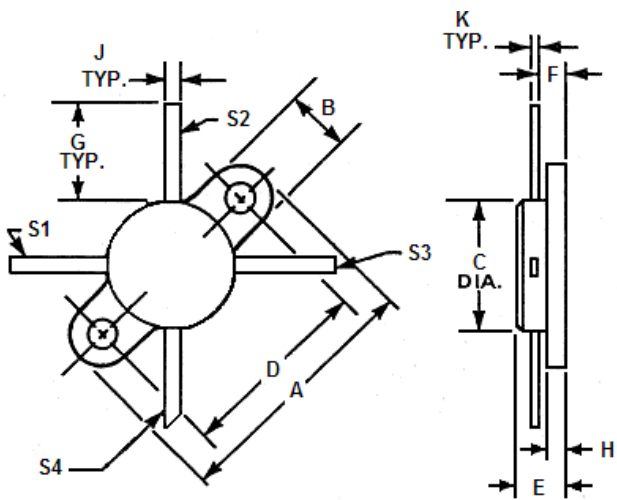

| DIM. | INCHES | | MM | |
|------|--------|------|------|------|
| | MIN. | MAX. | MIN. | MAX. |
| A | .970 | .980 | 24.6 | 24.9 |
| B | .245 | .255 | 6.22 | 6.48 |
| C | .485 | .495 | 12.3 | 12.6 |
| D | .720 | .730 | 18.3 | 18.5 |
| E | .250 | .292 | 6.35 | 7.42 |
| F | .155 | .182 | 3.94 | 4.62 |
| G | .400 | .420 | 10.2 | 10.7 |
| H | .090 | .110 | 2.29 | 2.79 |
| J | .045 | .055 | 1.14 | 1.40 |
| K | .005 | .007 | .127 | .178 |

Mounting holes are 0.118 +/- .010 mil