




ACTUAL SIZE



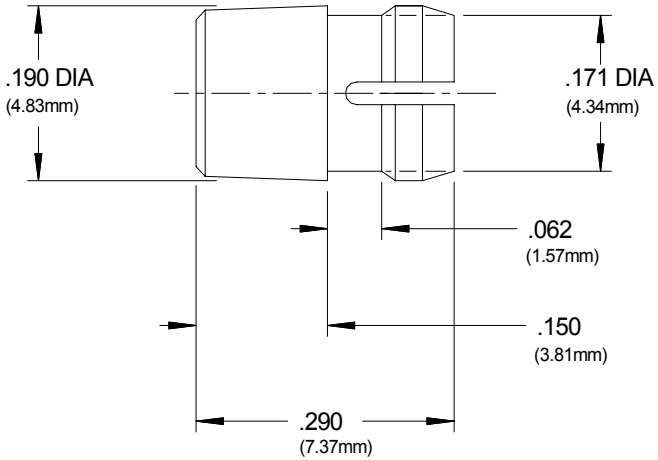

RECOMMENDED LED
SIZE T-1

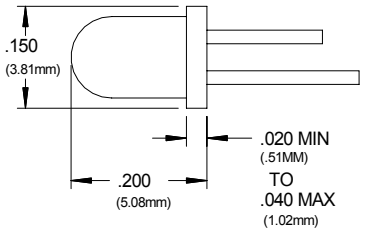

LEDs with a major ID of .125" can be accommodated by reducing the panel mounting hole size.

ORDERING CODES

SML 190 RTP

MODEL

COLOR

RTP Red Transparent BTP Blue Transparent
ATP Amber Transparent YTP Yellow Transparent
GTP Green Transparent CTP Clear Transparent

NOTES:

MATERIAL: Polycarbonate

DESIGN: Low profile lens using fresnel rings and striated lines.

MOUNTING: Mounts thru the front of panel. Mounting holes should be deburred but not chamfered.
Lens mounts in a .171 ±.002 (4.34mm) hole on 1/4" centers
Panel thickness 1/32" to 1/16"

Standard metal or plastic washer can be used to increase panel thickness if necessary.

U.S. & Foreign Pat. Issued & Pend.

TOLERANCES (EXCEPT AS NOTED)	REVISIONS			
	NO.	DESCRIPTION	DATE	BY
DECIMAL ±.010	1			
ANGLE ± 30'	2			
DIAMETER .003 TIR	3			
	4			
RADII .008 Max	5			

CLIPLITE® SML 190

VISUAL COMMUNICATIONS COMPANY, INC.
7920-G ARJONS DRIVE SAN DIEGO, CA 92126 U.S.A. (619) 549-6900

DRAWN BY JMS	SCALE 5 X	MATERIAL See Notes	
CHK'D	DATE 10/25/85	DRAWING NO. SML190A	
TRACED	APP'D		