


Features

- 6000W peak pulse power (8/20)
- Low leakage: nA level
- Low operating voltage: 4.5V
- Ultra low clamping voltage
- One power line protects
- Complies with following standards:
 - IEC 61000-4-2 (ESD) immunity test
Air discharge: $\pm 30\text{kV}$
Contact discharge: $\pm 30\text{kV}$
 - IEC61000-4-4 (EFT) 80A (5/50ns)
 - IEC61000-4-5 (Lightning) 200A (8/20 μs)
- RoHS Compliant


Applications

- Power Management
- Industrial Application
- Power Supply Protection

Dimensions DFN2020-3



Pin Configuration



Mechanical Characteristics

- Package: DFN2020-3
- Lead Finish: NiPdAu
- Case Material: "Green" Molding Compound
- UL Flammability Classification Rating 94V-0
- Moisture Sensitivity: Level 3 per J-STD-020
- Terminal Connections: See Diagram Below
- Marking Information: See Below

Absolute Maximum Ratings (T_{amb}=25°C unless otherwise specified)


Parameter	Symbol	Value	Unit
Peak Pulse Power (8/20 μs)	P _{pp}	6000	W
ESD per IEC 61000-4-2 (Air)	V _{ESD}	± 30	Kv
ESD per IEC 61000-4-2 (Contact)		± 30	
Operating Temperature Range	T _J	-55 to +125	°C
Storage Temperature Range	T _{STJ}	-55 to +150	°C

Electrical Characteristics


(TA=25°C unless otherwise specified)

Part Number	Device Marking	V _{RWM} (V)	V _{BR} (V)	I _T (mA)	V _C @50A	V _C		I _R μA (Max)	C (Pf) (Typ.)
						(Max)	(@A)		
SD4501P4-3	93P	4.5	4.8	1	10	30	200	6	650


Typical Performance Characteristics ($T_A=25^\circ\text{C}$ unless otherwise Specified)

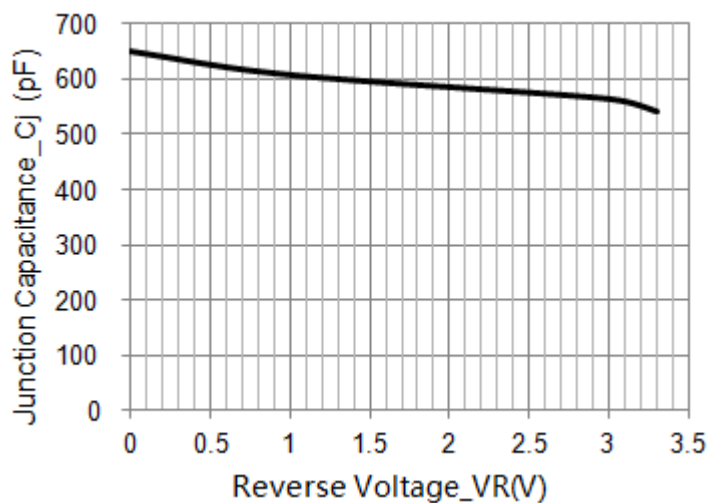


Junction Capacitance vs. Reverse Voltage

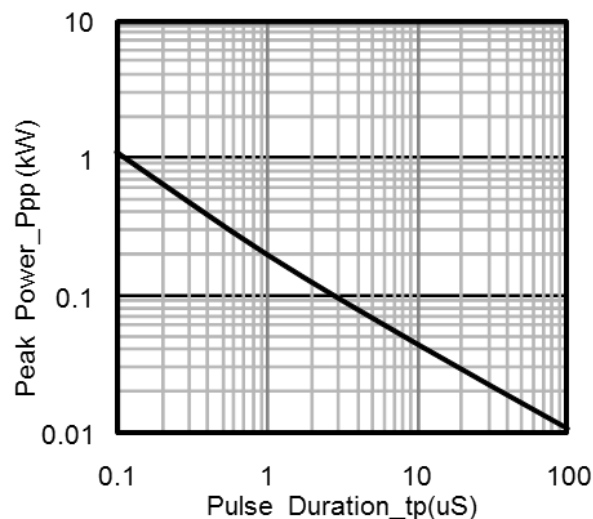


Peak Pulse Power vs. Pulse Time

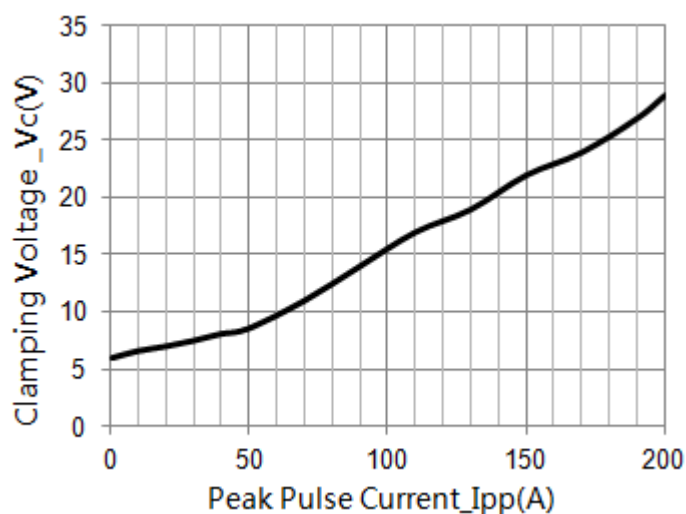


Clamping Voltage vs. Peak Pulse Current

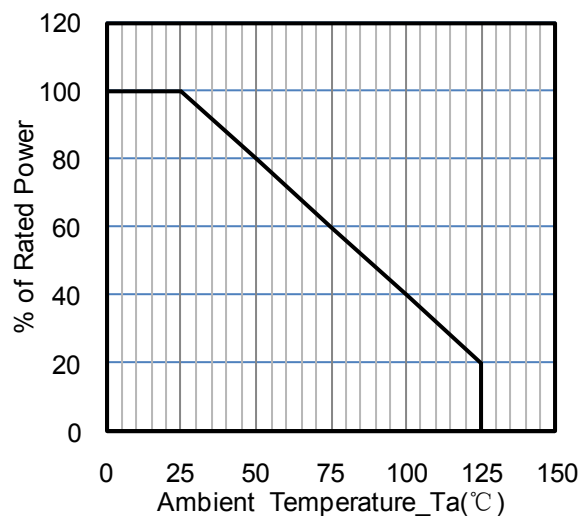

Power Derating Curve

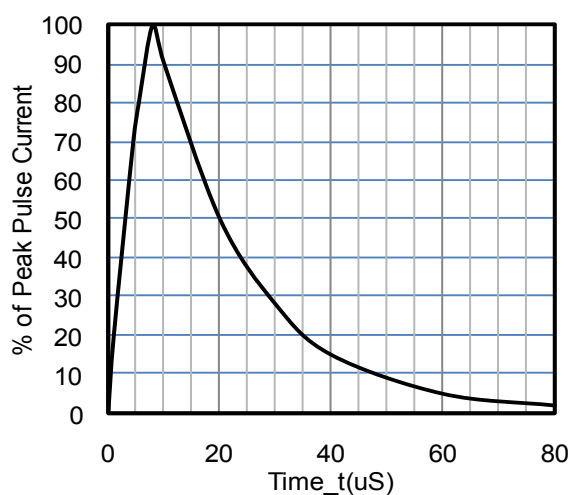

8 X 20us Pulse Waveform

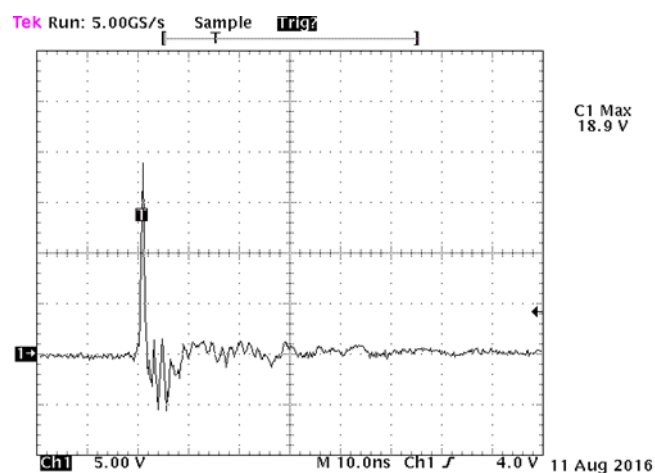

ESD Clamping Voltage

Technical drawing of a rectangular component with dimensions in mm. The drawing includes a top view and a side view.

Top View Dimensions:

- Overall width: 2.1 mm
- Overall height: 2.1 mm
- Distance from top edge to top of feature 1: 1.05 mm
- Distance from top edge to top of feature 2: 0.95 mm
- Distance from left edge to center of feature 1: 0.35 mm
- Distance from left edge to center of feature 2: 0.25 mm
- Distance between centers of features 1 and 2: 1.3 mm
- Distance from bottom edge to bottom of feature 1: 0.3 mm
- Distance from bottom edge to bottom of feature 2: 0.2 mm
- Distance from left edge to center of feature 3: 1.6 mm
- Distance from left edge to center of feature 4: 1.4 mm
- Distance between centers of features 3 and 4: 2.1 mm
- Distance from bottom edge to center of feature 3: 1.1 mm
- Distance from bottom edge to center of feature 4: 0.9 mm
- Distance from top edge to center of feature 1: 0.45 mm
- Distance from top edge to center of feature 2: 0.35 mm

Side View Dimensions:

- Maximum width: 0.65 mm

Dimensions in mm

[illegible]