Topstek True RMS Current Transducer TU16P5A..TU16P150A-CL420

TU16P5A~150A-CL420



Features

- ♦ Highly reliable True RMS current measurement device
- ♦ Clamp on split core structure
- ♦ Faster response time than temperature sensing
- ♦ Excellent linearity of the output voltage over a wide input range
- ♦ VFD and SCR type waveforms current measurement
- ♦ 4-20mA True RMS current loop output
- ♦ High isolation voltage between the measuring circuit and the current-carrying conductor (AC3KV)
- ♦ Flame-Retardant plastic case and silicone encapsulant, using UL classified materials, ensures protection against environmental contaminants and vibration over a wide temperature and humidity range

Applications

- ♦ Power measurement, power panel
- ♦ True RMS AC current measurement

Options


- ♦ Plastic case material:
  UL94V0 Nylon 66 (black) standard and PC(blue) option
- ♦ Operating temperature range:
  70°C standard and option 85°C available
- ♦ Connector type: specify –E or –M. If other types of connector required, please contact factory for other possibilities.
  –M: UL 1017 AWG22, Length:150±10mm with Molex 5045 type female connector (2.54mm pitch)
  –Y: UL 1017 AWG18 Wire, Length:3000±50mm, Two Y4.3 Terminals with PVC Tube

Specifications


Parameter	Symbol	Unit	5A	10A	20A	30A	50A	75A	100A	150A
Full Scale Input Current	I_{PN}	A RMS	5	10	20	30	50	75	100	150
Max Primary Current Peak	I_{PMax}	A	±30	±60	±120	±180	±300	±450	±450	±450
Input Crest Factor (Peak/Average Ratio)	CF		6	6	6	6	6	6	4.5	3
Current Output Protocol	I_{OUT}	mA	4-20 mA Current Loop, 4mA@ I_P =0A, 20mA@ I_P = I_{PN}							
Output Offset Current	I_{OS}	mA	+4 mA							
Over-Scale Output Current	I_{OL}	mA	<+23 mA							
Load Resistance	R_L	Ω	<300 Ω							
Supply Voltage	V_{CC}	V	+20V .. +32V							
Accuracy @ I_{PN}		%	Within ±1% of I_{PN} @25°C(excluding offset)							
Linearity	ρ	%	Within ±1% of I_{PN}							
Consumption Current	I_{CC}	mA	4-20 mA (= I_{OUT})							
Response Time (90% I_{PN} Step)	T_r	μsec	<200 msec							
Frequency bandwidth (±1dB)	f_{BW}	Hz	20 to 6kHz							
Thermal Drift of Output	-	%/°C	Within ±0.1 %/°C @ I_{PN}							
Thermal Drift of Zero Current Offset	-	μA/°C	< ±3μA/°C(0-60°C), < ±6μA/°C(-40 .. 70°C)							
Dielectric Strength	-	V	AC3KV X 60 sec							
Isolation Resistance @ 1000 VDC	R_{IS}	MΩ	>1000 MΩ							
Operating Temperature	T_a	°C	-40°C to 70°C							
Storage Temperature	T_s	°C	-45°C to 85°C							
Mass	W	g	80 g							

Appearance, dimensions and pin identification of TU16P-CL420


All dimensions in mm ±0.2, holes –0, +0.2 except otherwise noted.

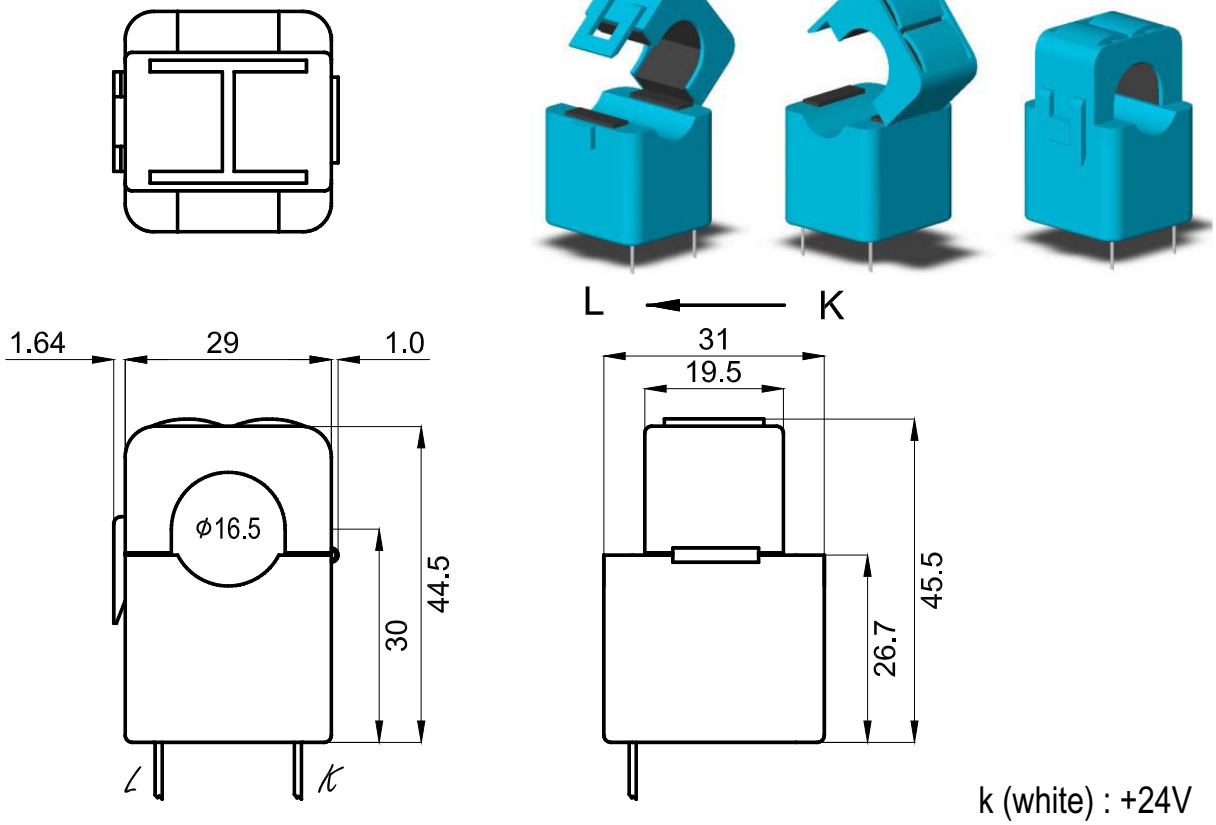

k (white) : +24V
l (black) : Iout

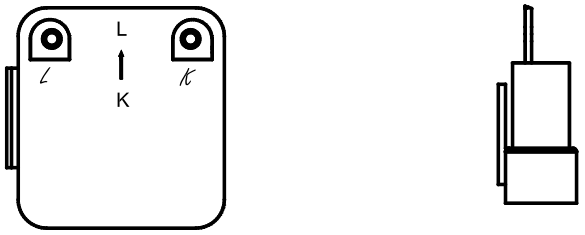

Standard Terminal

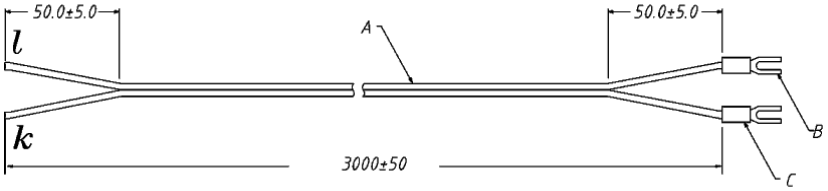

Option Y Terminal

Application Connection

