Electronic power general current transformer

Model:TA2032FL-200



Characteristics:

Fully enclosed, two output types of leading wire and plug terminal. For power measuring, overcurrent detecting, leakage current protecting, current feedback.


Technical index:

Mounting type：Plate type
Material of the core：Silicon steel sheet
Flame resistance：UL94-V0
Execution standard：GB1208-2006
Operating temperature：-35℃～+85℃
Storage temperature：-45℃～+95℃
Frequency range：20Hz-20KHz
Dielectric strength：≥3.5KV 50Hz 1min


Electrical parameters:

Rated input	0-400	A
Max.input		A
Rated output	0-0.2	A
Turns ratio	1：2000	
Accuracy	±1	%
Linearity	≤0.2	%
Phase difference		
max：Max. sampling resistance	12	Ω
Weight		g


Schematic diagram:

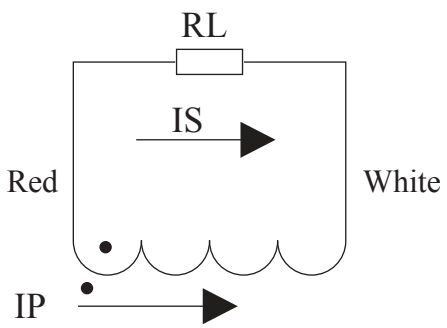

Dimensions（in mm）:

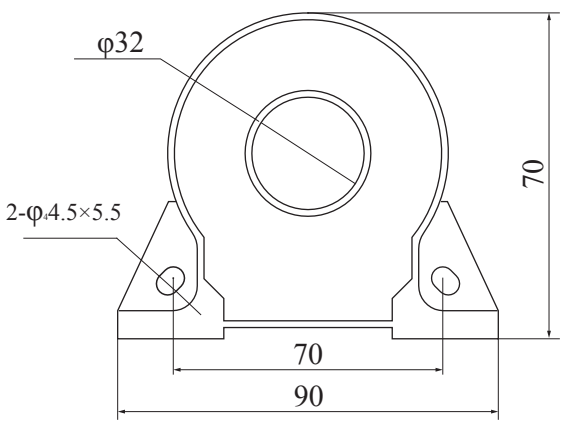

Front view

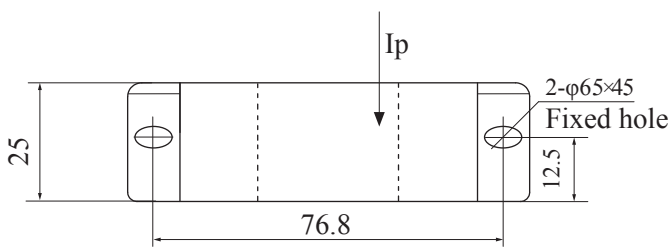

Bottom view