

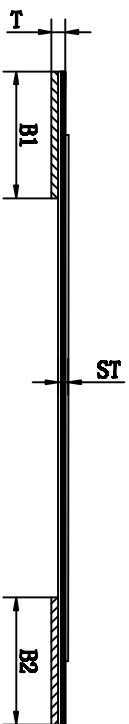


客户确认	
日期	

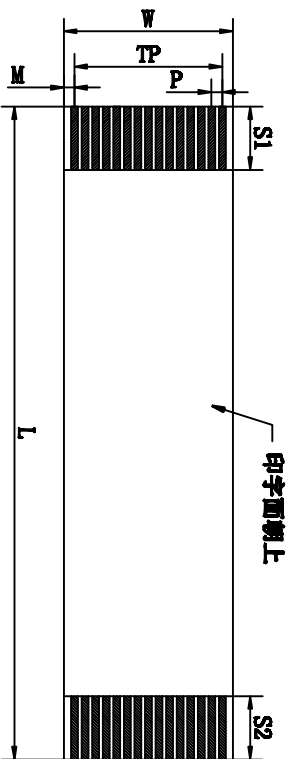

Symbol 符号	Item 项目	Specification 规格
N	No. of Conductors (导体芯数)	12
P	Pitch (间距)	0.5±0.05
TP	Total Pitch (总间距)	6.5±0.10
W	Width (总宽度)	6.5±0.10
M	Margin (边缘宽度)	0.5±0.10
L	Total Length (总长度)	100±3
T	Insertion Thickness (插入厚度)	0.30±0.05
ST	Surface Thickness (线身厚度)	0.12±0.05
SI/S2	Conductor Strip Length (裸铜长度)	4/4±1.0
B1/B2	Supporting tape Length (补强板长度)	8/8±2.0
A1	Slanting (切口倾斜度)	<0.5

ELECTRICAL CHARACTERISTICS

Conductor Resistance: JIS-C-3102 (at 20°C) 2.20Ω/1M Max.
Insulation Resistance: Apply the voltage of DC 500V for one min 100MΩ Min.

Dielectric Strength: Apply AC 500V for one minute.
Continuity Test: Apply microtest machine No Open/Short
Rated voltage & temperature: UL Sub. 7589V-1

Material

Insulation: Flame Retardant Polyester
Color: White
Conductor: Copper with 1u m min. tin-Plating
Supporting Tape: Flame Retardant Polyester
Color: Blue

核准:	日期:	<p>品名规格: FPCO. 5-12P L=100MM 4/4-8/8 同面</p> <p>客户料号 C3025473</p> <p>单位 mm 比例 /</p> <p>图纸编号 F-FPCOK12P-1000 版本 A</p>			
业务:	日期:	<p>深圳市灿科盟实业有限公司 CHANKEMENG INDUSTRIAL CO., LTD</p>			
制图:	日期:	<p>LYF 2022-06-10</p>			