

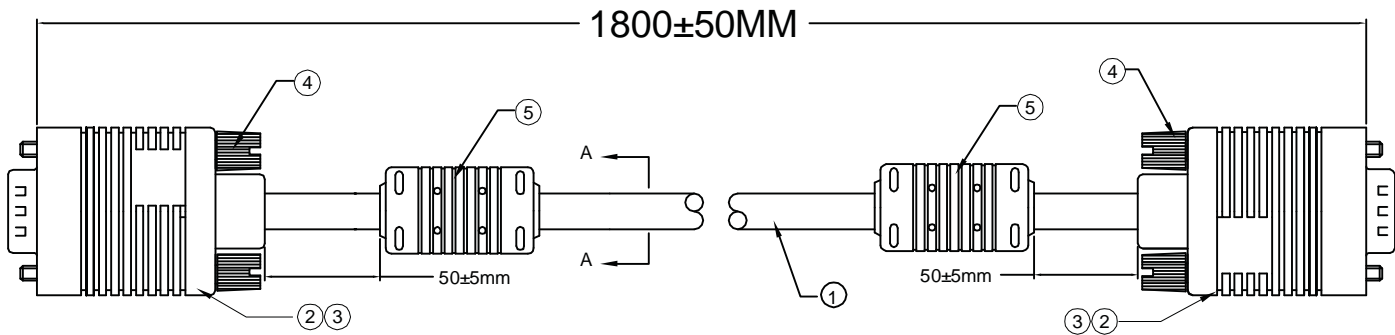


RoHS Compliant

HDB 15P MALE




HDB 15P MALE



- 1.CABLE: UL 2919 [30AW++AL/MY]*3COAX+30AWG*7C+AL/MY+D
+B OD=8.0±0.20mm JACKET COLOR: BEIGE
CABLE MUST PRINT: Exxxxxx AWM STYLE 2919 80°C 30V VW-1
- 2.CONNECTOR:
P1&P2: HDB 15P/M,SOLDER,BLUE INSULATION,GOLD PLATED CONTACTS, NICKEL PLATED SHELL
- 3.HOOD: MOLDED TYPE,ABS,COLOR:BEIGE.
- 4.THUMB SCREW: #4-40 UNC, MOLDED TYPE,PVC 45P,COLOR:BEIGE
- 5.FERRITE CORE: (Ø17.5 XØ9.5 X 28.5mm), MOLDED BEIGE PVC.
- 6.ELECTRICLE TEST:
(1)100% OPEN SHORT & MIS WIRE TEST.
(2)CONTACT RESISTANCE 3 ohm Max .
(3)INSULATION RESISTANCE 10M ohm Min .
(4)HI-POT TEST:DC 300V/10ms

PIN Assignment

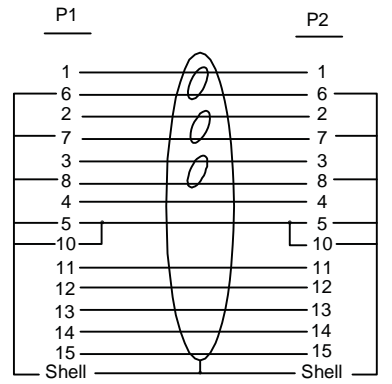


Single Cable

VGA Monitor connection cable, HD15
M/M, 1.8m, 3Coax/7C, 2x ferrite,
UL, be

P/N: AK-310103-018-E


4 016032 286622



Inner Packing Unit

P/N:AK-310103-018-E
QTY:5 PCS

4 016032 286622



Date	Name	Part No. AK-310103-018-E
Drawn by	Sean	
Checked by	Joe	
Approved by	Andy	EAN:4016032286622
ASSMANN Electronic GmbH		Title HDB 15P/M - HDB 15P/M CABLE
		Scale Unit

80496