


1. CONFIGURATION & DIMENSIONS :

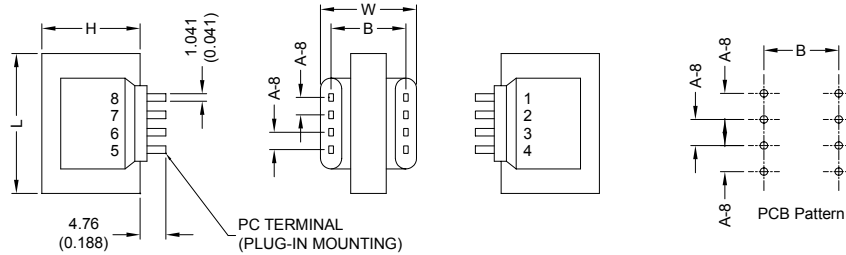

TYPE DPC 8 PINS

UNIT : mm (inch)

SIZE (VA)	L	W	H	A-8 8 PIN	B	WT. (gram)	OPTIONAL BRACKET *		
							NO.	MW	MD
1.2	35.30 (1.390)	30.00 (1.181)	30.16 (1.188)	5.08 (0.200)	25.40 (1.000)	118.70	---	---	---

2. SCHEMATIC :



Series Connected

Parallel Connected

3. ELECTRICAL CHARACTERISTICS (@ 25°C) :

- | | |
|--------------------------------------|--------------------------------------|
| a. Primary Voltage | AC 115/230 V 50/60 Hz . |
| b. No Load Primary Current | Less Than 10mA . |
| c. Secondary Voltage (±5%) | Series AC - V .
Parallel AC - V . |
| d. Secondary Load Current | Series 14mA .
Parallel 28mA . |
| e. Full Load Primary Current | Less Than - mA . |
| f. Full Load Secondary Voltage (±5%) | Series 88.00V .
Parallel 44.00V . |
| g. DC Resistance | |
| Pin 1-2 | Primary-1 = 1050 Ohm . |
| Pin 3-4 | Primary-2 = 1275 Ohm . |
| Pin 5-6 | Secondary = - Ohm . |
| Pin 7-8 | = - Ohm . |
| h. Insulation Resistance | DC 500V 100Meg Ohm Of More . |
| i. Withstand Voltage (Hi-Pot) | AC 1500V 60Hz 1 Minutes . |
| j. Temperature Rise | Less Than 60 Deg C . |
| k. Core Size | EI-35 x 10.00 m/m . |

l. Turns & Wire Gauge

Primary-1	Pin 1-2	Turns	Diameter	m/m
Primary-2	Pin 3-4	Turns	Diameter	m/m
Secondary-1	Pin 5-6	Turns	Diameter	m/m
Secondary-2	Pin 7-8	Turns	Diameter	m/m



RoHS Compliant

NOTE : Specifications subject to change without notice. Please check our website for latest information.

17.03.2008



SUPERWORLD ELECTRONICS (S) PTE LTD