Wideband RF Transformer


EPR1625GE

- Designed for E4, STM-1, STS-3 and OC-3 Applications
- Low Profile Surface Mount RF Transformer
- Operating Temperature : -40°C to +85°C
- 0.1 MHz to 400 MHz Frequency RangE
- Hipot : 1500 Vrms


Electrical Parameters @ 25° C

Primary Inductance (μH Min.)	**Return Loss** (dB Typ.)				**DCR** (Ω Max.)
@ 100 KHz, 20m Vrms	@ 1 MHz	@ 5 MHz	@ 100 MHz	@ 320 MHz	
36	-15	-20	-20	-15	0.3

Schematic

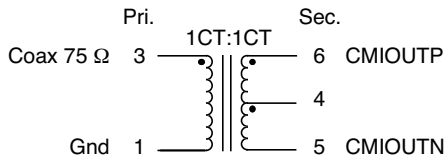

Package

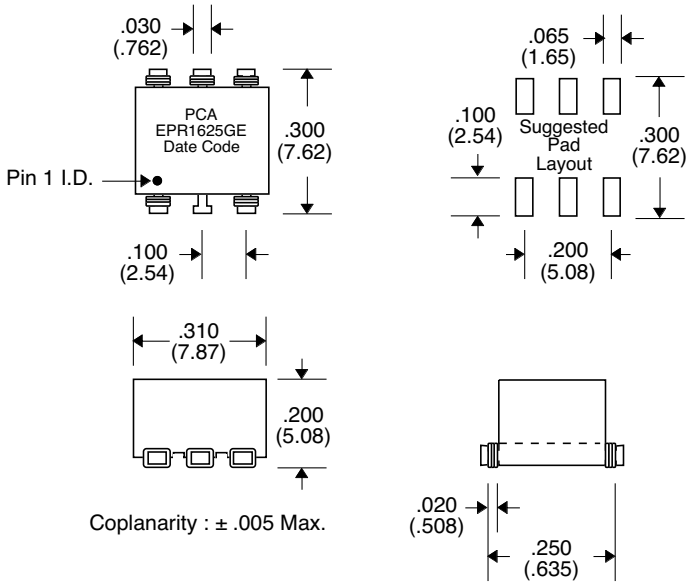

Unless Otherwise Specified Dimensions are in Inches /mm ± .010 /.25

PCA ELECTRONICS, INC.
16799 SCHOENBORN ST.
NORTH HILLS, CA 91343

Product performance is limited to specified parameters. Data is subject to change without prior notice.

TEL: (818) 892-0761
FAX: (818) 894-5791
http://www.pca.com