


Model:TA8414L

Characteristics:

High accuracy, good consistency. simple circuit, without external power supply, perform reliably. Current and voltage transformation in place at a time, Directly change the measured current isolation to voltage output.

Technical index:


Suspended mounting, output with cable
Material of the core: Silicon steel sheet
Flame resistance: UL94-V0
Operating temperature: $-25^{\circ}\text{C} \sim +65^{\circ}\text{C}$
Storage temperature: $-45^{\circ}\text{C} \sim +80^{\circ}\text{C}$
Frequency range: $50\text{Hz} \sim 2000\text{Hz}$
Dielectric strength: 5KV 50Hz 1min

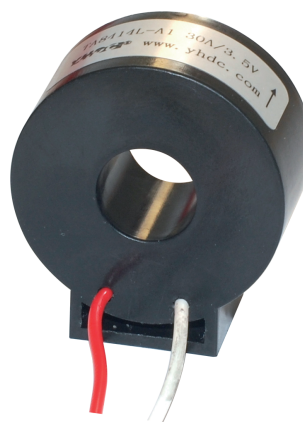


Electrical parameters:

Rated input	0-60	A
Max. input	72	A
Rated output	0-10	V
Accuracy	0.2, 0.5	%
Linearity	0.2	%
Phase difference	$0^{\circ} - 10^{\circ}$	
Weight		g


Schematic diagram:

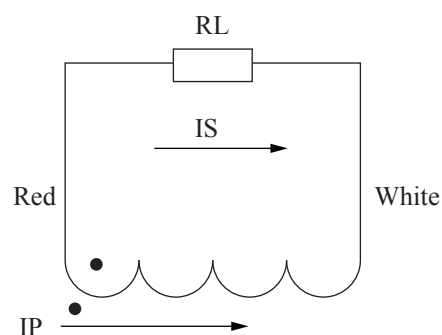

Dimensions (in mm) :

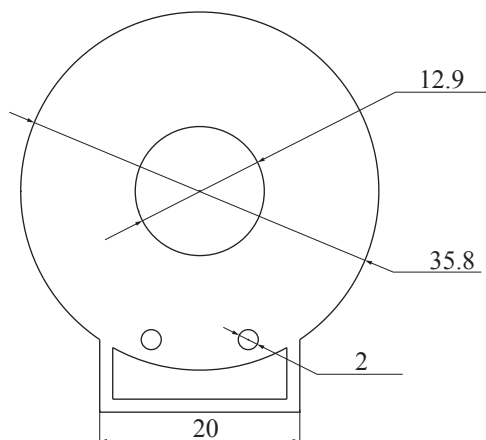

Front view

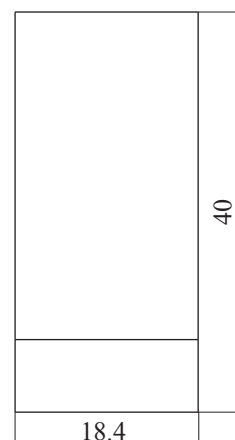

Side view