
PIN Power Inductor
DEP1016

RoHS



Description
- Ferrite core construction.
- Magnetically shielded.
- L × W × H: 14.5 × 10.1 × 16.0 mm Max.
- Product weight:8.9 g(Ref.)
- Moisture Sensitivity Level: 1
- RoHS compliance.

Dimension - [mm]

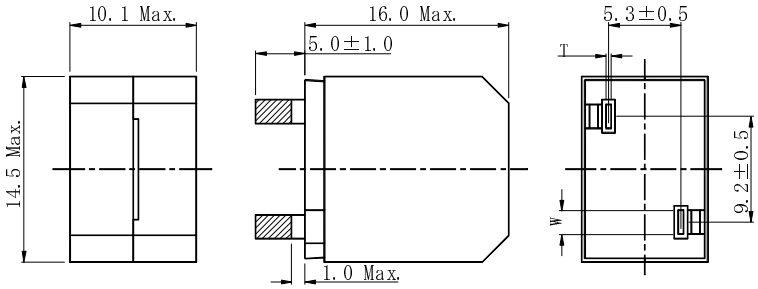


No.	L(μH)	T(mm)	W(mm)
1	5.0	0.60ref.	1.75ref.
2	10.0	0.50ref.	1.75ref.
3	15.0	0.50ref.	1.75ref.
4	18.0	0.45ref.	1.75ref.
5	22.0	0.45ref.	1.75ref.
6	27.0	0.40ref.	1.75ref.
7	33.0	0.35ref.	1.75ref.

Environmental Data
- Operating temperature range: -40℃~+105℃ (including coil's self temperature rise)
- Storage temperature range: -40℃～+105℃

Packaging
- Pallet packaging.

Applications
- Ideally used in Digital amplifier filter in car audio, home theater and large LCD etc.

Schematics - [mm]



Electrical Characteristics

Part No.	Stamp	Inductance [within] ※1	D.C.R.(mΩ) [Max.] (at20℃)	Saturation Current (A) (at 20℃) ※2	Temperature rise current (A) ※3
DEP1016NP-5R0PB	5R0	5.0μH±25%	5.1	18.2	14.1
DEP1016NP-100PB	100	10.0μH±25%	9.1	13.4	11.5
DEP1016NP-150PB	150	15.0μH±25%	9.1	8.7	11.5
DEP1016NP-180PB	180	18.0μH±25%	10.1	7.9	9.8
DEP1016NP-220PB	220	22.0μH±25%	11.4	7.2	8.5
DEP1016NP-270PB	270	27.0μH±25%	13.8	6.6	7.5
DEP1016NP-330PB	330	33.0μH±25%	15.0	5.8	7.3

※1. Measuring condition: at 1kHz.
※2. Saturation current: The value of D.C. current when the inductance decreases to 75% of it's nominal value.
※3. Temperature rise current: The value of D.C. current when the temperature rise is △t=40℃(Ta=20℃).


Revised: 7-Jan-14

PIN Power Inductor
DEP1016


Saturation Current & Temperature Rise Graph

L (20℃) △T


1. DEP1016NP-5R0PB

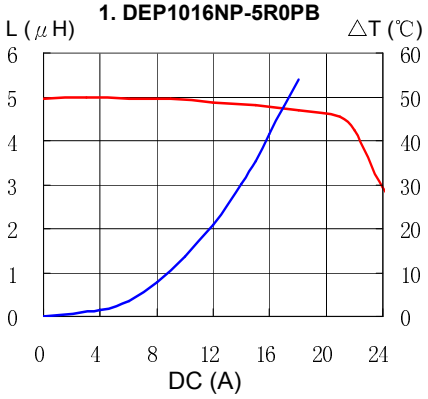


2. DEP1016NP-100PB

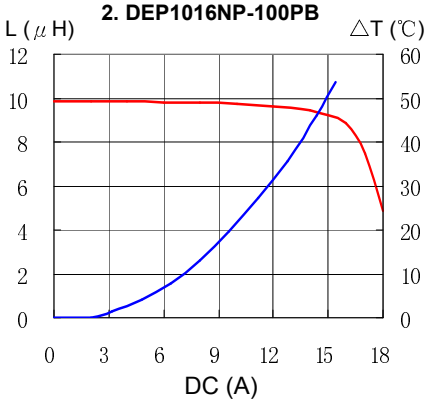


3. DEP1016NP-150PB

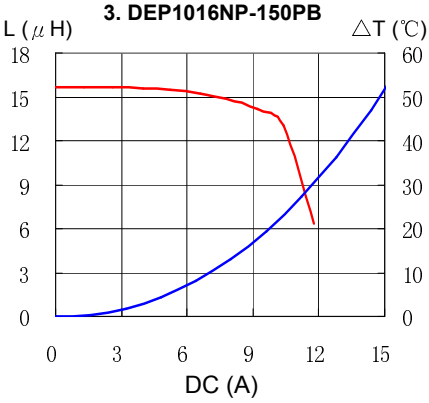


4. DEP1016NP-180PB

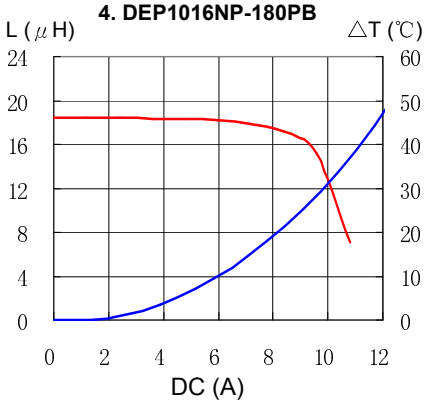


5. DEP1016NP-220PB

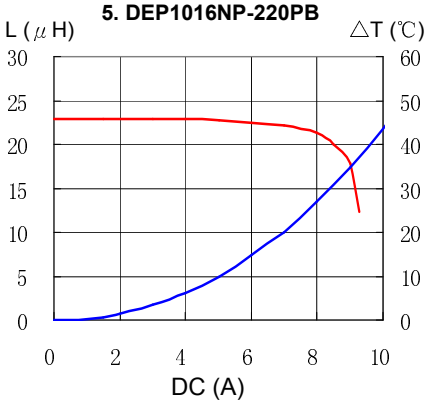

6. DEP1016NP-270PB

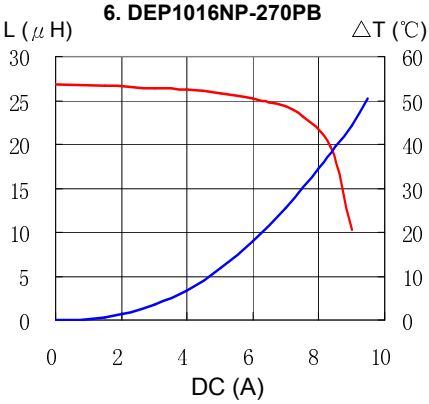

7. DEP1016NP-330PB

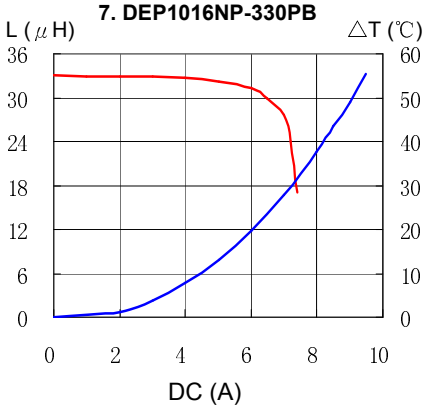

Please refer to the sales offices on our website - http://www.sumida.com

Hong Kong
Tel.+852-2880-6781
FAX.+852-2565-9600
sales@hk.sumida.com

Shanghai
Tel.+86-21-5836-3299
FAX.+86-21-5836-3266
shanghai.sales@cn.sumida.com

Shenzhen
Tel.+86-755-8291-0228
FAX.+86-755-8291-0338
shenzhen.sales@cn.sumida.com

Taipei
Tel.+886-2-8751-2737
FAX.+886-2-8751-2738
sales@tw.sumida.com

Saitama(Japan)
Tel.+81-48-691-7300
FAX.+81-48-691-7340
sales@jp.sumida.com

Seoul
Tel.+82-2-6237-0777
FAX.+82-2-6237-0778
sales@kr.sumida.com

Singapore
Tel.+65-6296-3388
FAX.+65-6841-4426
sales@sg.sumida.com

San Jose
Tel.+1-408-321-9660
FAX.+1-408-321-9308
sales@us.sumida.com

Chicago
Tel.+1-847-545-6700
FAX. +1-847-545-6720
sales@us.sumida.com

Obernzell
Tel.+49-8591-937-0
FAX. +49-8591-937-103
contact@eu.sumida.com

Neumarkt
Tel.+49-9181-4509-110
FAX. +49-9181-4509-310
infocomp@eu.sumida.com