

DESCRIPTION:

The KWL-1111Ux series is 11.00mm x 11.00mm square type light bar display designed for a variety of applications where a large source of light is required, such as panel indicators, backlight legends and light arrays.

ABSOLUTE MAXIMUM RATINGS: (Ta=25°C)


Parameter	Max
Reverse Voltage per segment	5 V
Reverse Current per segment (Vr = 5V)	100μA
Derating Linear from 25°C per segment	0.4mA/°C
Operating Temperature Range	-40°C To 85°C
Storage Temperature Range	-40°C To 100°C
Soldering Temperature 1.6mm(1/16") from body for 5 sec. at 260°C	

NOTES : 1. All dimensions are in millimeters (inches).
2. Tolerance is ±0.25mm(0.010) unless otherwise specified.
3. Specifications are subject to change without notice.
4. NP: No Pin.
5. NC: No Connect.


TESTING CONDITION FOR EACH PARAMETER :

Parameter	Symbol	Unit	Test Condition
Forward Voltage	Vf	V	If=20mA
Peak Emission Wave Length	λp	nm	If=20mA
Spectral Line Half-Width	Δλ	nm	If=20mA
Reverse Current	Ir	μA	Vr=5V
Average Luminous Intensity	Iv	μ cd	If=10mA

PACKAGE DIMENSIONS

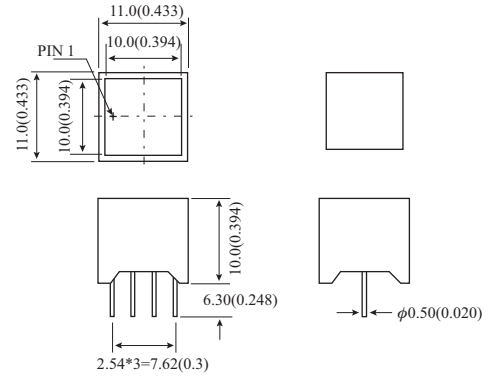

INTERNAL CIRCUIT DIAGRAM



PART NO. SELECTION AND APPLICATION INFORMATION (RATINGS AT 25°C AMBIENT)

Part No.	Chip		C.C or C.A	Wave Length λρ (nm)	Absolute Maximum Ratings				Electro-optical Characteristic						
	Raw Material	Emitted Color			Δλ (nm)	Pd (mW)	If (mA)	If (Peak) (mA)	Vf (V) Per Chip			If (Rec) mA	Iv (mcd)		
									Min.	Typ.	Max.		Min.	Typ.	
KWL-1111U3	GaAsP/GaP	Hi-Eff. Red	No	635	45	100	50	100	1.7	1.9	2.6	10-20	2.5	6.0	
KWL-1111US	GaAlAs	Super Red		Common	660	20	100	50	100	1.5	1.9	2.6	10-20	6.0	12.0
KWL-1111U2	GaP	Green	Polar		565	30	100	50	100	1.7	2.2	2.6	10-20	2.0	5.0
KWL-1111UG	GaP	Super Green			Polar	570	30	100	50	100	1.7	2.2	2.6	10-20	4.0
KWL-1111U6	GaAsP/GaP	Yellow		Polar		585	30	100	50	100	1.7	1.9	2.6	10-20	2.0

REMARKS : 1. The average luminous intensity is obtained by summing the luminous intensity of each segment and dividing by the total number of segments.
2. Luminous intensity is measured with a light sensor and filter combination that approximates the CIE (International Commission on Illumination) eye-response curve.
3. Clean only by pure water, isopropanol, ethanol, Freon TF (or equivalent).