


1. Mechanical Dimensions:






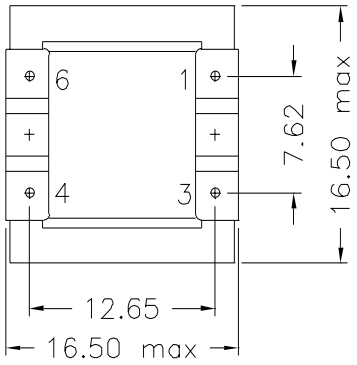

(BOTTOM VIEW)

2. Schematic:

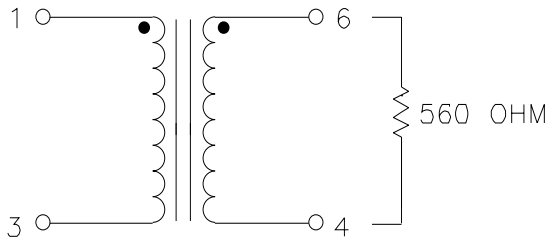

3. Electrical Specifications:

TURN RATIO: 1:1 ±1% (PIN1–3 : PIN6–4).
DCR (PIN1–3): 65 ±8% OHMS.
DCR (PIN6–4): 65 ±8% OHMS.
OCL (PIN1–3) 7.0H Min. @1Hz, 1.0V PARALLEL.
Leakage L: (Pins 1–3) 5mH Max 1KHz, 1.0V Series (Short 6–4)
INSERTION LOSS: 1.15dB Typ. @1KHz,1.0V.
RETURN LOSS: 20dB Typ 300–4000Hz (REF. 600 OHMS).
FREQ. RESPONSE: ±0.20dB 300–4000Hz (REF. 1KHz).
HI–POT: 3750VAC (PIN1–6).
HI–POT: 2000VAC (PIN1–Core).

DOC. REV: A/1

XFMRS Inc	Title: MODEM TRANSFORMER		
UNLESS OTHERWISE SPECIFIED TOLERANCES: .xx ±0.20 Dimensions in MM	P/N: XF16P–021A		REV. A
	DWN.	李清儿	Jan–26–99
	CHK.	刘小说	Jan–26–99
SHEET 1 OF 1	APP.	Joe Huff	Jan–26–99

THIS DOCUMENT IS STRICTLY NOT ALLOWED TO BE DUPLICATED WITHOUT AUTHORIZATION