
9A, 950V N-CHANNEL POWER MOSFET



TO-247


■ DESCRIPTION

The UTC **9N95** uses UTC's advanced proprietary, planar stripe, DMOS technology to provide excellent $R_{DS(ON)}$, low gate charge and operation with low gate voltages. This device is suitable for use as a load switch or in PWM applications.

■ FEATURES


* $R_{DS(ON)}$ = 1.4Ω @V_{GS} = 10 V
* Ultra Low Gate Charge (Typical 45 nC)
* Low Reverse Transfer Capacitance (C_{RSS} = Typical 14 pF)
* Fast Switching Capability
* Avalanche Energy Specified
* Improved dv/dt Capability, High Ruggedness

■ SYMBOL



■ ORDERING INFORMATION

Ordering Number		Package	Pin Assignment			Packing
Lead Free	Halogen Free		1	2	3	
9N95L-T47-T	9N95G-T47-T	TO-247	G	D	S	Tube



(1) T: Tube
(2) T47: TO-2475
(3) G: Halogen Free, L: Lead Free

Copyright © 2012 Unisonic Technologies Co., Ltd

■ ABSOLUTE MAXIMUM RATING (T_C =25°C, unless otherwise specified)

PARAMETER		SYMBOL	RATINGS	UNIT
Drain-Source Voltage		V_{DSS}	950	V
Gate-Source Voltage		V_{GSS}	±30	V
Continuous Drain Current (T_C = 25°C)		I_D	9.0	A
Pulsed Drain Current (Note 2)		I_{DM}	36	A
Avalanche Current (Note 2)		I_{AR}	9.0	A
Avalanche Energy	Single Pulsed(Note 3)	E_{AS}	900	mJ
	Repetitive(Note 2)	E_{AR}	28	mJ
Peak Diode Recovery dv/dt (Note 4)		dv/dt	4.0	V/ns
Power Dissipation		P_D	160	W
Linear Derating Factor above T_C = 25°C			1.28	W/°C
Junction Temperature		T_J	150	°C
Storage Temperature		T_{STG}	-55 ~ +150	°C

Note: 1. Absolute maximum ratings are those values beyond which the device could be permanently damaged. Absolute maximum ratings are stress ratings only and functional device operation is not implied.
2. Repetitive Rating : Pulse width limited by maximum junction temperature
3. L = 21mH, I_{AS} = 9.0A, V_{DD} = 50V, R_G = 25 Ω, Starting T_J = 25°C
4. I_{SD}≤9.0A, di/dt ≤ 200A/μs, V_{DD}≤ BV_{DSS}, Starting T_J = 25°C

■ THERMAL DATA

PARAMETER	SYMBOL	RATINGS	UNIT
Junction to Ambient	θ_{JA}	50	°C/W
Junction to Case	θ_{JC}	0.78	°C/W

■ ELECTRICAL CHARACTERISTICS (T_J =25°C, unless otherwise specified)

PARAMETER		SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
OFF CHARACTERISTICS							
Drain-Source Breakdown Voltage		BV_{DSS}	V_{GS} = 0 V, I_D = 250μA	950			V
Drain-Source Leakage Current		I_{DSS}	V_{DS} = 950 V, V_{GS} = 0 V			10	μA
Gate-Body Leakage Current	Forward	I_{GSSF}	V_{GS} = 30 V, V_{DS} = 0 V			100	nA
	Reverse	I_{GSSR}	V_{GS} = -30 V, V_{DS} = 0 V			-100	nA
Breakdown Voltage Temperature Coefficient		$\triangle BV_{DSS}/\triangle T_J$	I_D=250μA, Referenced to 25°C		0.99		V/°C
ON CHARACTERISTICS							
Gate Threshold Voltage		$V_{GS(TH)}$	V_{DS} = V_{GS}, I_D = 250μA	3.0		5.0	V
Static Drain-Source On-Resistance		$R_{DS(ON)}$	V_{GS} = 10V, I_D = 4.5A		1.05	1.4	Ω
DYNAMIC PARAMETERS							
Input Capacitance		C_{ISS}	V_{DS} = 25 V, V_{GS} = 0 V, f = 1.0 MHz		2100	2730	pF
Output Capacitance		C_{OSS}			175	230	pF
Reverse Transfer Capacitance		C_{RSS}			14	18	pF
SWITCHING CHARACTERISTICS							
Turn-On Delay Time		$t_{D(ON)}$	V_{DD} = 475V, I_D =11.0 A, R_G = 25Ω (Note 1, 2)		50	110	ns
Turn-On Rise Time		t_R			120	250	ns
Turn-Off Delay Time		$t_{D(OFF)}$			100	210	ns
Turn-Off Fall Time		t_F			75	160	ns
Total Gate Charge		Q_G	V_{DS} = 760V, I_D = 11.0A, V_{GS} = 10 V (Note 1,2)		45	58	nC
Gate-Source Charge		Q_{GS}			13		nC
Gate-Drain Charge		Q_{GD}			18		nC


■ ELECTRICAL CHARACTERISTICS(Cont.)


PARAMETER	SYMBOL	TEST CONDITIONS	MIN	TYP	MAX	UNIT
DRAIN-SOURCE DIODE CHARACTERISTICS AND MAXIMUM RATINGS						
Drain-Source Diode Forward Voltage	V_{SD}	V_{GS} = 0 V, I_S = 9.0 A			1.4	V
Maximum Continuous Drain-Source Diode Forward Current	I_S				9.0	A
Maximum Pulsed Drain-Source Diode Forward Current	I_{SM}				36	A
Reverse Recovery Time	t_{rr}	V_{GS} = 0 V, I_S = 9.0 A, d_{IF} / dt =100 A/μs (Note 1)		550		ns
Reverse Recovery Charge	Q_{RR}			6.5		μC


Notes: 1. Pulse Test : Pulse width≤300μs, Duty cycle≤2%
2. Essentially independent of operating temperature


■ TEST CIRCUITS AND WAVEFORMS

Peak Diode Recovery dv/dt Test Circuit & Waveforms

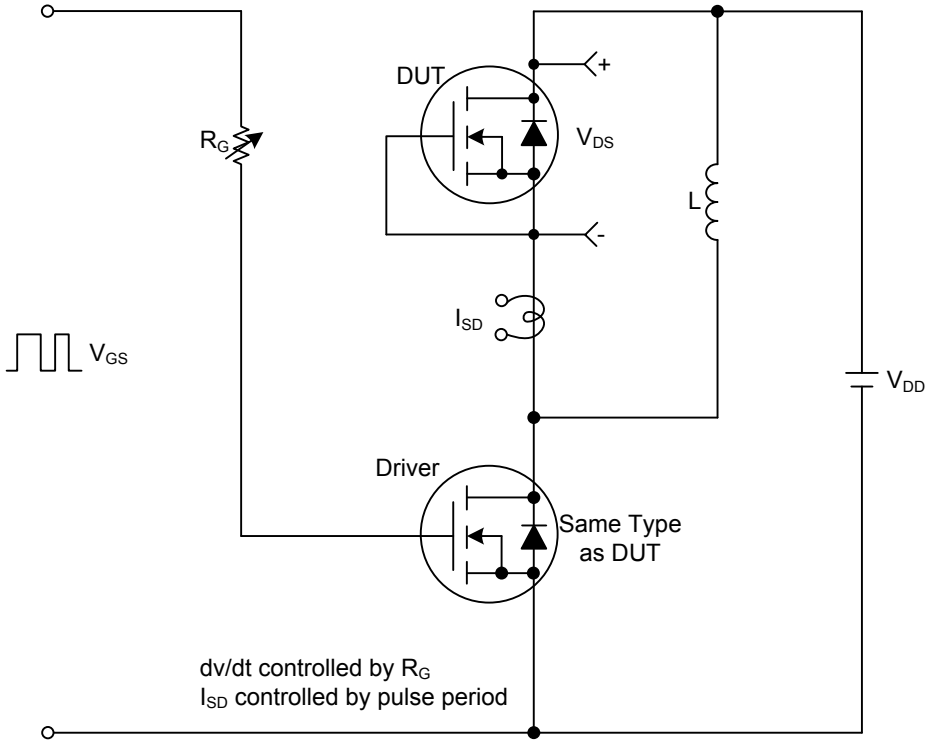


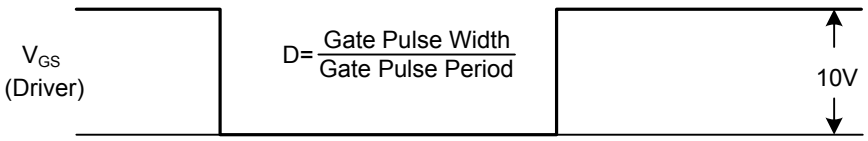

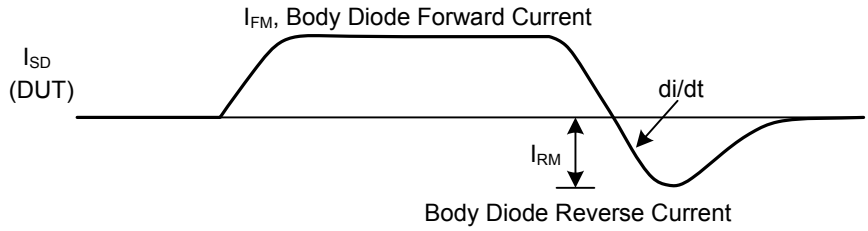


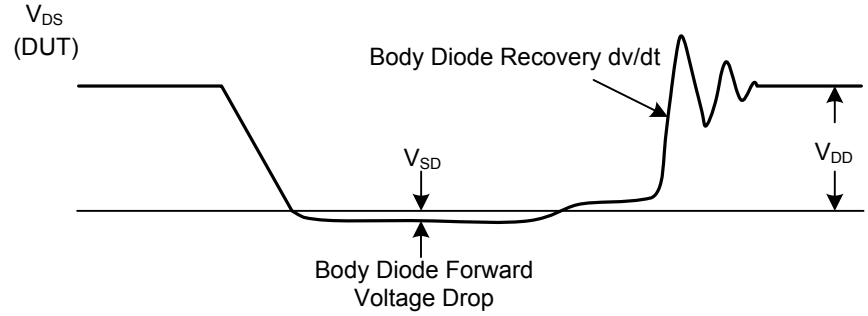


■ TEST CIRCUITS AND WAVEFORMS(Cont.)

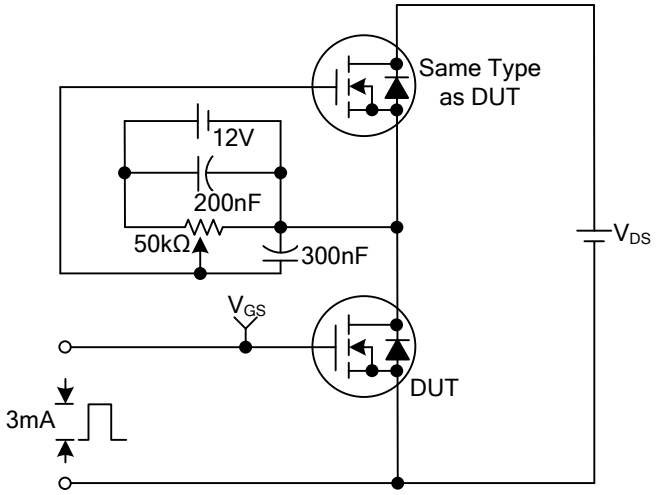


Gate Charge Test Circuit

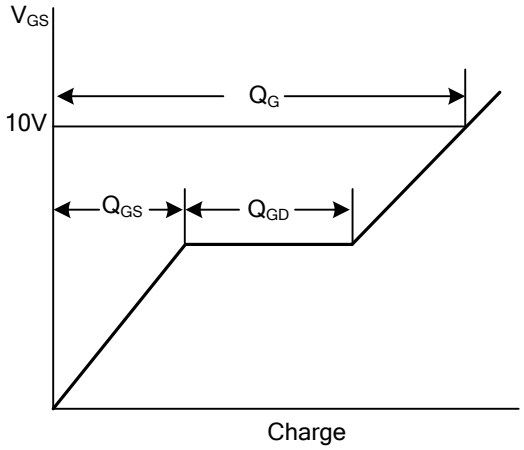


Gate Charge Waveforms

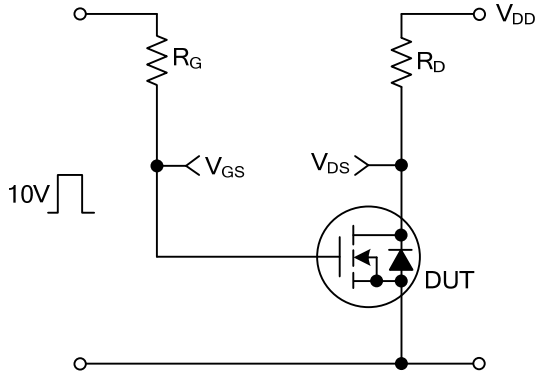


Resistive Switching Test Circuit

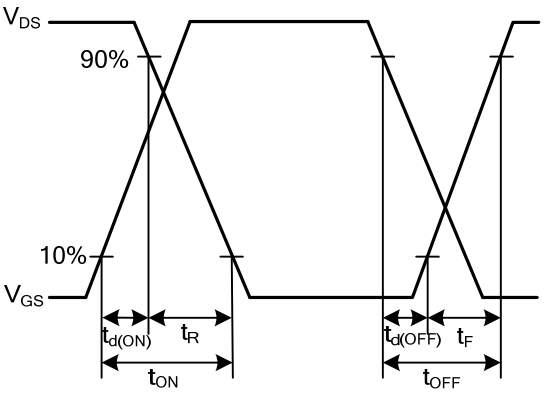

Resistive Switching Waveforms

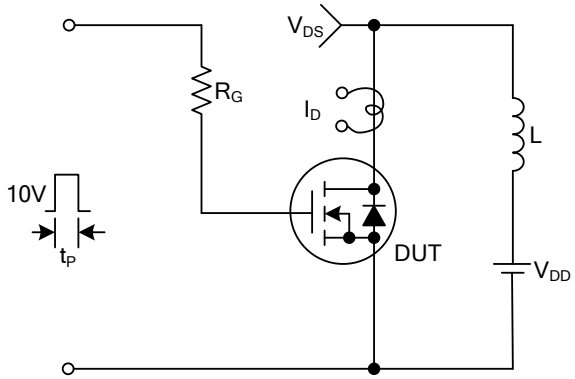


Unclamped Inductive Switching Test Circuit

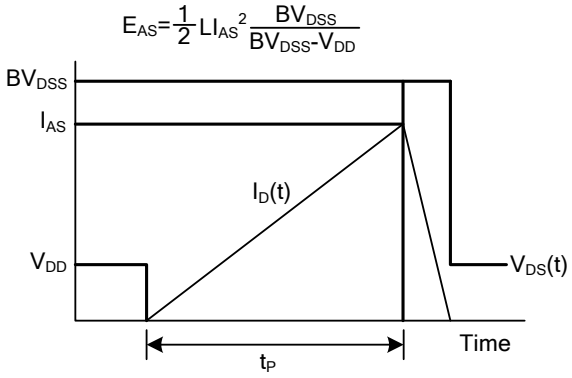


Unclamped Inductive Switching Waveforms

■ TYPICAL CHARACTERISTICS


Drain Current vs.
Source to Drain Voltage

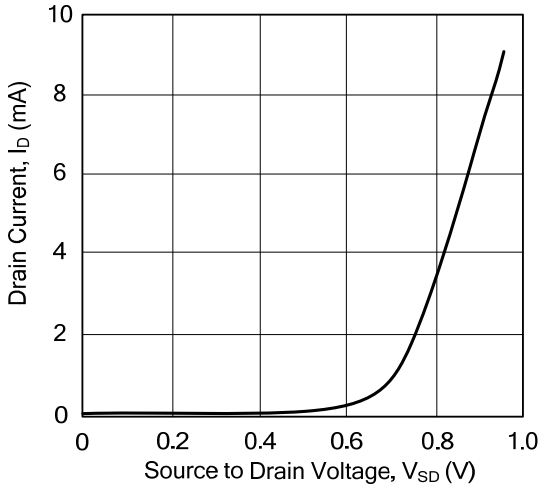


Drain-Source
On-State Resistance Characteristics

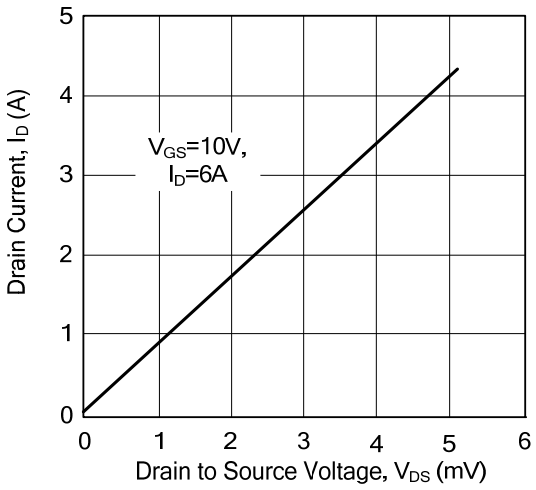

Drain Current vs.
Gate Threshold Voltage

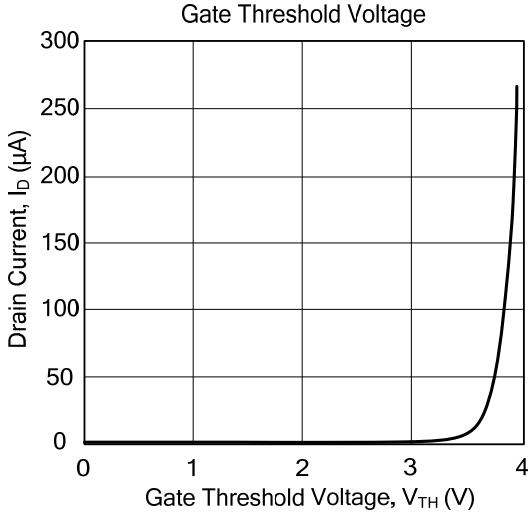

Drain Current vs.
Drain-Source Breakdown Voltage

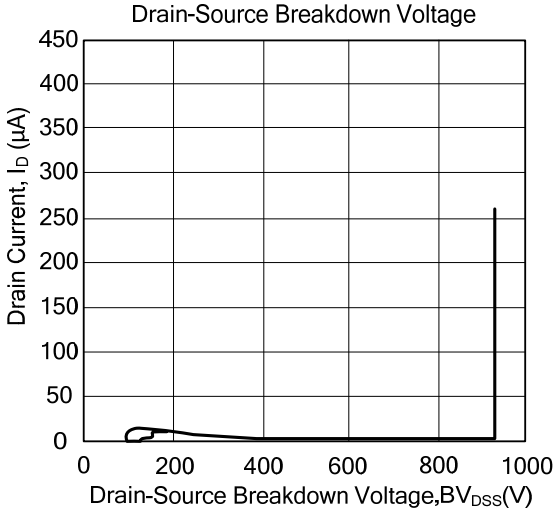

UTC assumes no responsibility for equipment failures that result from using products at values that exceed, even momentarily, rated values (such as maximum ratings, operating condition ranges, or other parameters) listed in products specifications of any and all UTC products described or contained herein. UTC products are not designed for use in life support appliances, devices or systems where malfunction of these products can be reasonably expected to result in personal injury. Reproduction in whole or in part is prohibited without the prior written consent of the copyright owner. The information presented in this document does not form part of any quotation or contract, is believed to be accurate and reliable and may be changed without notice.