



环保物料



TEL:0769-82001899

Poles	DIM.A	DIM.B	DIM.C
2P	4.25	1.25	7.3
3P	5.50	2.50	8.5
4P	6.75	3.75	9.8
5P	8.00	5.00	11.0
6P	9.25	6.25	12.3
7P	10.50	7.50	13.5
8P	11.75	8.75	14.8
9P	13.00	10.00	16.0
10P	14.25	11.25	17.3
11P	15.50	12.50	18.5
12P	16.75	13.75	19.8
13P	18.00	15.00	21.0
14P	19.25	16.25	22.3
15P	20.50	17.50	23.5
16P	21.75	18.75	24.8
18P	24.25	21.25	26.0
20P	26.75	23.75	27.3

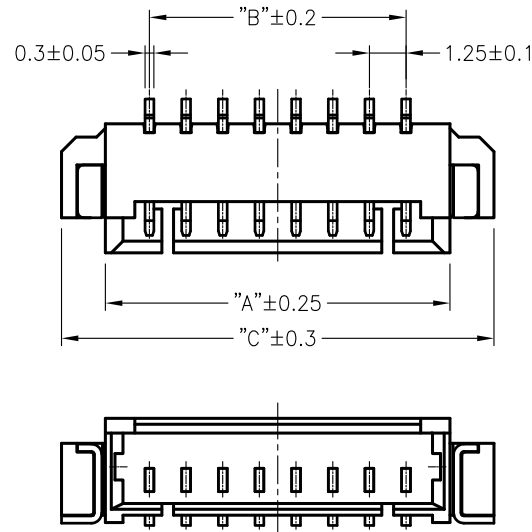

■ Specifications :

- Voltage rating: 125V AC / DC
- Current rating: 1A AC / DC
- Withstanding voltage: 250V AC/minute
- Temperature range: -25°C~+85°C
- Insulation resistance: ≥100MΩ
- Contact resistance: ≤20mΩ
- After environmental testing: ≤40mΩ

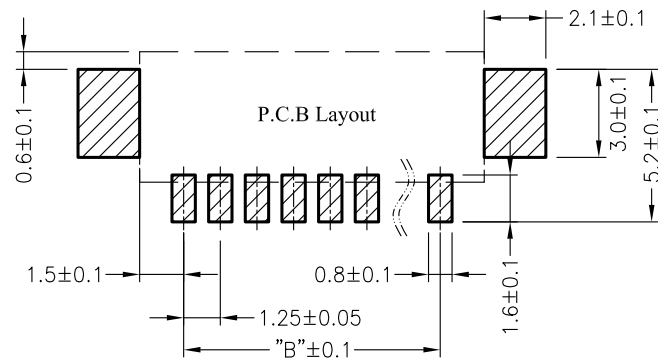

				TOLERANCE UNLESS OTHERWISE		DRAWN	CK tan	XFCN兴飞连接器有限公司 CONNECTORS XFCN CONNECTORS CO., LTD.		SHEET	1/1
				X.	±0.30	X°	±5°			CHKD	DATE
				.X	±0.20	.X°	±2°	APPD	PRODUCT NAME	1.25mm Crimp Style Connectors	
				.XX	±0.08	.XX°	±1°	VIEW	PART. NO.	M1250RS-XX-XX	
AO	MODIFICATION			DRAW	DATE	.XXX	±0.03	.XXX°	±0.5°	UNITS	mm
VER									SCALE	1:1	
									DWG. NO.	009	