

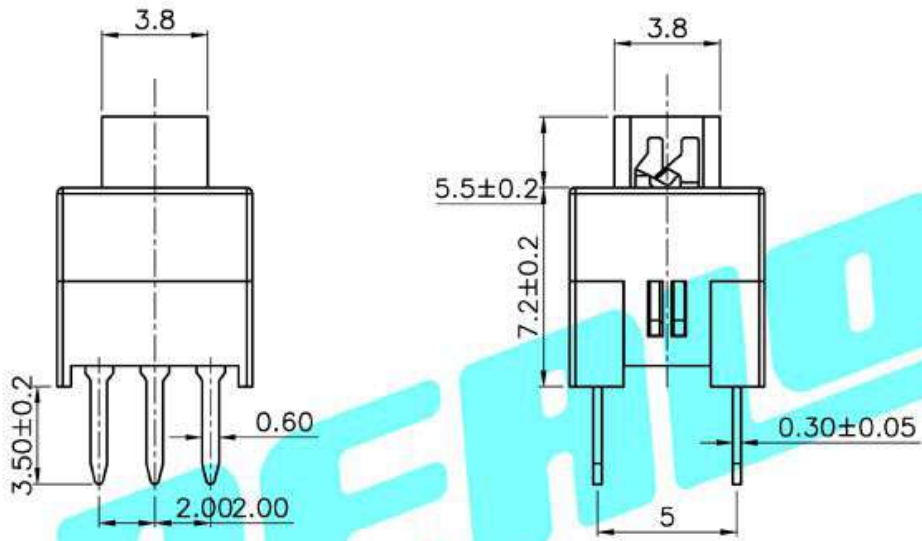

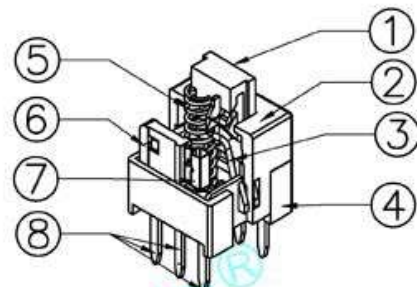


NOTE:
 1. Operating Force: 230gf±50gf
 2. Travel : 2.4±0.2mm



PCB Layout(Pattern Side)

NO.	Operating Type	Part No.
1	Push To Lock	PB-22E72-L
2	Push No Lock	PB-22E72-N
3	Push No Sound No Lock	PB-22E72-S



Circuit Diagram

ITEM	PART NAME	QTY.	MATERIAL	FINISHING
⑧	Terminal	6	Brass strip	Plating silver
⑦	Contact	2	Phosphor bronze	Plating silver
⑥	Securing glue	2	PA66	Black
⑤	Spring	1	SUS	Natural
④	Base	1	PBT	Black
③	Crochet Needle	1	SUS	Natural
②	Cover	1	POM	White
①	KNOB	1	POM	Blue

APPROVALS		DATE		
DRAWN	G.M.Chen	2015/4/16		
CHECKED			TITLE:	PUSH SWITCH
APPROVALS			PART NO.	PB-22E72-X
TOLERANCES ARE			ANGLE	UNIT: mm
30~45°	±0.30	±2'	SCALE: 1:1	SHEET 1 OF 1
10~30°	±0.20		DRAWING NO.	PROJ:
5~10°	±0.15			
~ 5°	±0.10			

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			