
Product data sheet
Characteristics

LDL44400WU44X
Circuit breaker, PowerPact L, Micrologic 6.3A, 400A, 4 poles, 480 V, 18 kA, 80% rated, mission critical

Price* : 11,016.00 USD

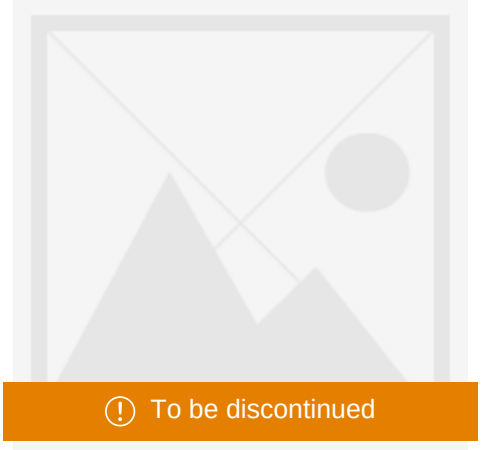

To be discontinued

Main

Range of product	PowerPact L
Product or component type	Circuit breaker
Trip Unit Type	Electronic, ammeter, Micrologic 6.3 A-W, LSIG
Interrupt Code	D

Complementary

Line Rated Current	400 A
Number of Poles	4P
Interrupt Rating	25 kA 240 V AC 18 kA 480 V AC
Voltage Rating	480 V AC
Continuous current rating	80 %
Protection technology	Current limiter
Mounting mode	Unit mount
Electrical connection	Lugs load Lugs line
Wire Size	AWG 2/0...500 kcmil aluminium/copper)2
Terminal Type	AL600LS52K4
I-Line Phase Connection	ABC
Height	13.39 in (340.11 mm)
Maximum Width	7.27 in (184.66 mm)
Maximum Depth	6.61 in (167.89 mm)
Tightening torque	442.54 lbf.in (50 N.m) 0.11…0.37 in² (70…240 mm²) AWG 2/0...500 kcmil)

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

* Price is “List Price” and may be subject to a trade discount – check with your local distributor or retailer for actual price.

Environment

Product certifications	CSA 22-2 CCC IEC CE UL 489 NMX NEMA

Ordering and shipping details

Category	01116-L ELEC TRIP UNIT MOUNT BREAKER/SW
Discount Schedule	DE2
Package weight(Lbs)	15.00 lb(US) (6.804 kg)
Returnability	Yes
Country of origin	US

Contractual warranty

Warranty	18 months