

6

5

4

3

2




1

Rev	AWO #	Description	Date	Appr
-		RELEASED	2/25/15	

APPROVED: _____



DATE: _____ TITLE: _____

D

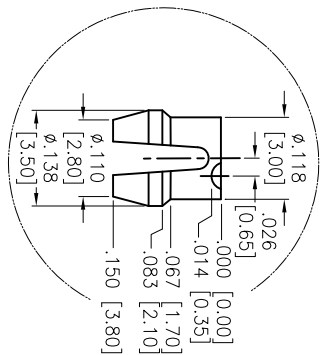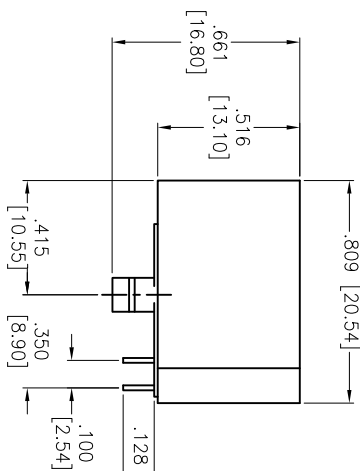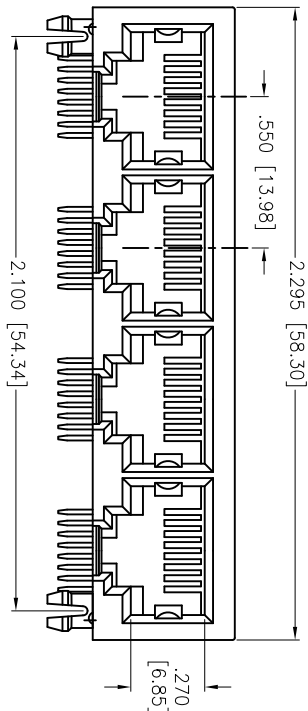

SPLIT PEG

C

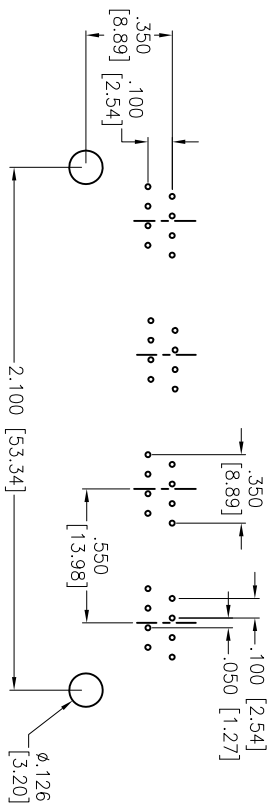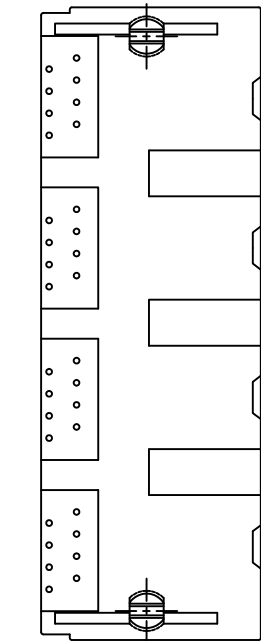

RECOMMENDED PCB LAYOUT

B

SPECIFICATIONS:

- Material: PBT Polyester, Glass Fiber, rated UL 94V-0
- Insulator color: Black
- Contacts: Phosphor Bronze
- Plating: Gold flash over Nickel underplate on contact area, Tin over copper underplate on solder tails.
- (See chart for thickness)
- Electrical:
 - Operating voltage: 150 VAC
 - Current rating: 1.5 Amps
 - Contact resistance: 20 mohms max
 - Insulation resistance: 500 Mohms min @ 500 VDC
 - Dielectric withstanding voltage: 1,000 Vrms or 1 minute
 - Temperature Rating: Operating temperature: -40°C to +85°C
- Environmental: Lead free, RoHS compliant.

X	PLATING
0	15 µin Gold
1	30 µin Gold
2	50 µin Gold

ADAM TECH

909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

MODULAR JACK GANGED, 4 PORT, 8P8C

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM]		TOLERANCES EXCEPT AS NOTED	
INCHES		HOLDS	
.X	± .10	ØX	± .10
.XX	± .020	ØXX	± .015
.XXX	± .015	ØXXX	± .010
APPROVALS		DATE	
DRAWN	HR	2/25/15	
CHECKED	AC	2/25/15	
APPROVED			
TITLE		SIZE	PART NO.
MODULAR JACK GANGED, 4 PORT, 8P8C		X	MTJG-4-88GX1-A
REF: S00065T		SCALE: NTS	SHEET 1 OF 1

A

6

5

4

3

2

1

