





FEATURES

- Fast Switching Speed
- Surface Mount Package Ideally Suited for Automatic Insertion
- For General Purpose Switching Applications
- High Conductance



MECHANICAL DATA

- * Case: Molded plastic
- * Lead: Axial leads, solderable per MIL-STD-750, method 2026
- * Polarity:Polarity symbols marked on case
- * Marking: T4,T6

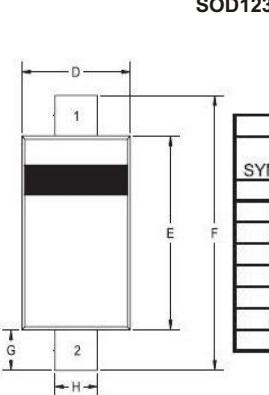

VOLTAGE RANGE

100Volts

CURRENT

0.15 Ampere

SOD123

SYMBOL	DIMENSIONS			
	INCHES		MILLIMETERS	
	MIN	MAX	MIN	MAX
A	0.037	0.053	0.95	1.35
B	0.000	0.005	0.00	0.12
C	-	-	0.008	0.20
D	0.055	0.071	1.40	1.80
E	0.098	0.110	2.50	2.80
F	0.142	0.154	3.60	3.90
G	0.016	-	0.40	-
H	0.020	0.028	0.50	0.70

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating 25°C ambient temperature unless otherwise specified.
Single phase half wave, 60Hz, resistive or inductive load.
For capacitive load, derate current by 20%.

TYPE NUMBER	1N4148W	UNITS
Maximum Recurrent Peak Reverse Voltage	100	V
Maximum RMS Voltage	70	V
Maximum DC Blocking Voltage	100	V
Maximum Average Forward Rectified Current		
See Fig. 1	0.15	A
Peak Forward Surge Current @ t=1.0 μ s	2.0	
@ t = 1.0s	1.0	A
Maximum Instantaneous Forward Voltage at 0.15A	1.25	V
Maximum DC Reverse Current Ta=25°C	1	μ A
at Rated DC Blocking Voltage		
Typical Junction Capacitance	2	pF
Total Power Dissipation	400	mW
Maximum Reverse Recovery Time (TRR typical)	8	ns
Operating Temperature Range T _J	-55 to +150	°C
Storage Temperature Range T _{STG}	-55 to +150	°C

RATING AND CHARACTERISTIC CURVES 1N4148W

