


Data sheet | Item number: 750-452/000-200

2-channel analog input; 0 ... 20 mA; Differential input; S5 PLC data format



[www.wago.com/750-452/000-200](http://www.wago.com/750-452/000-200)



Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.

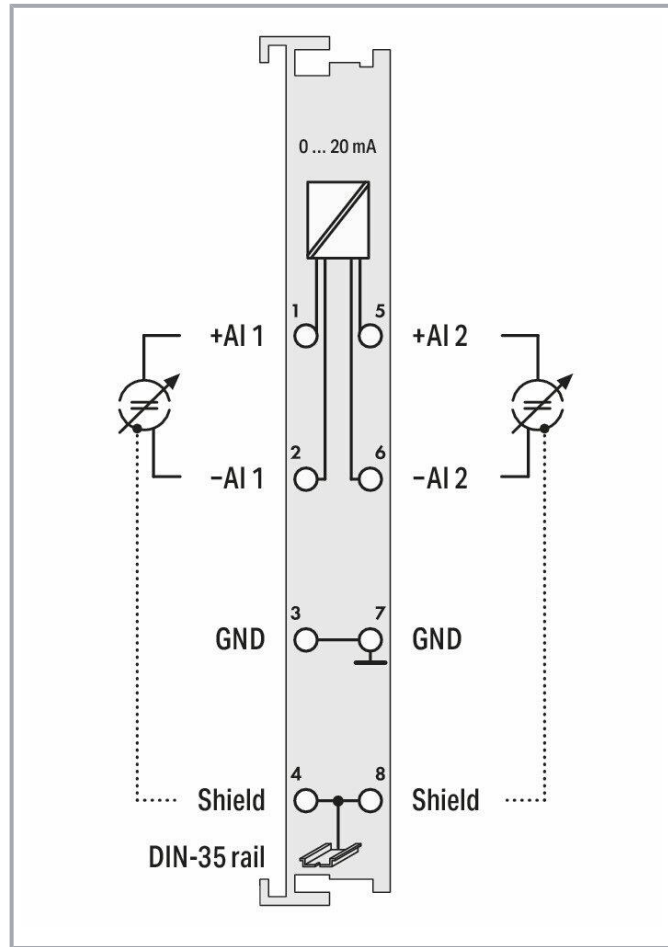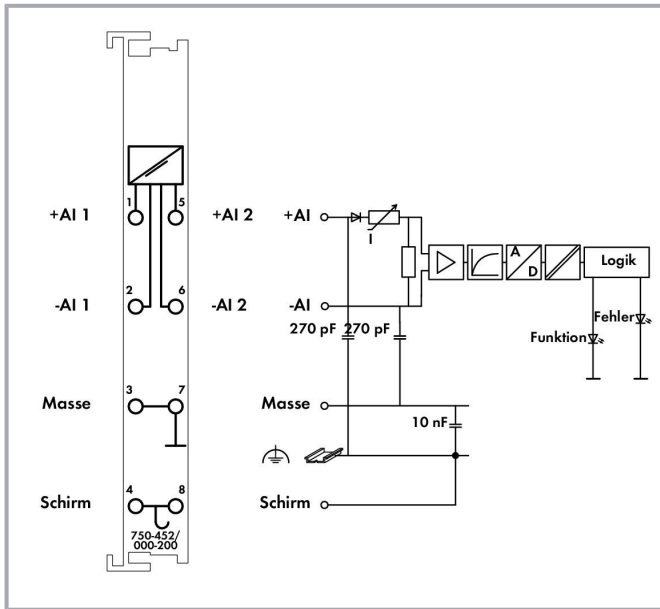

## Item description

This analog input module processes standard 0–20 V signals.

The input signal is electrically isolated and transmitted with a resolution of 12 bits.

The internal system supply powers the module.

The input channels of the module are differential inputs.

The shield directly connects to the DIN-rail.

## Data

### Technical data

|                                   |   |
|-----------------------------------|---|
| Number of analog inputs           | 2 |
| Total number of channels (module) | 2 |

Subject to changes. Please also observe the further product documentation!



|   |  |
|---|--|
| Signal type   | Current  |
| Signal type (current)   | 0 ... 20 mADC  |
| Sensor connection   | 2 x (2-wire)   |
| Input voltage (max.)  | 35 V   |
| Signal characteristic   | Differential   |
| Resolution [bit]  | 12 bits  |
| Input resistance (max.)   | 220 Ω  |
| Data width  | 2 x 16-bit data; 2 x 8-bit control/status (optional) |
| Conversion time (typ.)  | 2 ms   |
| Measurement error (reference temperature)                       | 25 °C  |
| Measurement error – deviation (max.) from the upper-range value | 0.2 %  |
| Temperature error (max.) of the upper-range value               | 0.01 %/K   |
| Supply voltage (system)   | 5 VDC; via data contacts                             |
| Power consumption (5 V system supply)                           | 70 mA  |
| Isolation   | 500 V system/field                                   |

### Connection data

|                                       |  |
|---------------------------------------|--|
| Connection technology: inputs/outputs | 8 x CAGE CLAMP®                              |
| Connection type (1)                   | Inputs/Outputs                               |
| Solid conductor                       | 0.08 ... 2.5 mm <sup>2</sup> / 28 ... 14 AWG |
| Fine-stranded conductor               | 0.08 ... 2.5 mm <sup>2</sup> / 28 ... 14 AWG |
| Strip length                          | 8 ... 9 mm / 0.31 ... 0.35 inch              |

### Physical data

|                                   |                      |
|-----------------------------------|----------------------|
| Width                             | 12 mm / 0.472 inch   |
| Height                            | 100 mm / 3.937 inch  |
| Depth                             | 69.8 mm / 2.748 inch |
| Depth from upper edge of DIN-rail | 62.6 mm / 2.465 inch |

### Mechanical data

|               |             |
|---------------|-------------|
| Mounting type | DIN-35 rail |
|---------------|-------------|

### Material data

|                  |                              |
|------------------|------------------------------|
| Color            | light gray                   |
| Housing material | Polycarbonate; polyamide 6.6 |
| Fire load        | 0.914 MJ                     |

Subject to changes. Please also observe the further product documentation!



|                    |      |
|--------------------|------|
| Weight             | 51 g |
| Conformity marking | CE   |

### Environmental requirements

|  |                                       |
|--|---------------------------------------|
| Surrounding air temperature (operation)  | 0 ... 55 °C                           |
| Surrounding air temperature (storage)  | -40 ... 85 °C                         |
| Protection type  | IP20                                  |
| Pollution degree (5)   | 2 per IEC 61131-2                     |
| Operating altitude   | 0 ... 2000 m                          |
| Mounting position  | horizontal (standing/lying); vertical |
| Relative humidity (without condensation)   | 95 %                                  |
| Vibration resistance   | 4g per IEC 60068-2-6                  |
| Shock resistance   | 15g per IEC 60068-2-27                |
| EMC immunity to interference   | per EN 61000-6-2, marine applications |
| EMC emission of interference   | per EN 61000-6-4, marine applications |
| Exposure to pollutants   | Per IEC 60068-2-42 and IEC 60068-2-43 |
| Permissible H <sub>2</sub> S contaminant concentration at a relative humidity 75 % | 10 ppm                                |
| Permissible SO <sub>2</sub> contaminant concentration at a relative humidity 75 %  | 25 ppm                                |

### Commercial data

|                       |                 |
|-----------------------|-----------------|
| Product Group         | 15 (Remote I/O) |
| PU (SPU)              | 1 Stück         |
| Packaging type        | box             |
| Country of origin     | DE              |
| GTIN                  | 4045454484088   |
| Customs tariff number | 85389099990     |

### Approvals / Certificates




#### Ex-Approvals

| Logo | Approval                    | Additional Approval Text | Certificate name            |
|------|-----------------------------|--------------------------|-----------------------------|
|      | ATEX<br>TUEV Nord Cert GmbH | EN 60079-0               | TÜV 07 ATEX<br>554086 X en. |
|      | CCCEX<br>CQST/CNEX          | CNCA-C23-01              | 2020312310000215            |


Subject to changes. Please also observe the further product documentation!







Ex nA IIC T4 Gc

|  |  |                |                                 |
|--|--|----------------|---------------------------------|
|  | <b>EAC</b><br>Brjansker Zertifizierungsstelle                        | TP TC 012/2011 | EAC RU C-DE.AM02.<br>B.00163/19 |
|  | <b>TUEV Nord</b><br>TUEV Nord Cert GmbH                              | IEC 60079-0    | IECEx TUN 09.0001<br>X          |
|  | <b>UL</b><br>Underwriters Laboratories Inc. (HAZARDOUS<br>LOCATIONS) | UL 121201      | E198726 Sec.1                   |

## Country specific Approvals

| Logo   | Approval                                    | Additional Approval Text | Certificate name            |
|--|---|--------------------------|-----------------------------|
|  | <b>KC</b><br>National Radio Research Agency | Article 58-2, Clause 3   | MSIP-<br>REM-W43-<br>AIM750 |

## Ship Approvals

| Logo   | Approval  | Additional Approval Text | Certificate name         |
|--|---|--------------------------|--------------------------|
|  | <b>ABS</b><br>American Bureau of Shipping               | -                        | 19-<br>HG1821926         |
|  | <b>BV</b><br>Bureau Veritas S.A.                        | -                        | 13453/DO BV              |
|  | <b>DNV GL</b><br>Det Norske Veritas, Germanischer Lloyd | -                        | TAA0000194               |
|  | <b>KR</b><br>Korean Register of Shipping                | -                        | KR<br>HMB05880-<br>AC001 |
|  | <b>LR</b>   | -                        | 02/20026 (E6)            |

Subject to changes. Please also observe the further product documentation!



Lloyds Register



**NK**  
Nippon Kaiji Kyokai

-

TA17255M



**PRS**  
Polski Rejestr Statków

-

TE/2236  
/880590/19




**RINA**  
RINA Germany GmbH

-

ELE066419XG







### UL-Approvals

| Logo  | Approval  | Additional Approval Text | Certificate name |
|---|---|--------------------------|------------------|
|  | <b>UL</b><br>UL International Netherlands B.V. (ORDINARY LOCATIONS) | UL 508                   | E175199<br>Sec.1 |

### Optional accessories

#### Shield termination

##### Shield clamping saddle

|  |   |  |
|--|---|--|
|  | <b>Item no.: 790-116</b><br>Shield clamping saddle; 19 mm wide; diameter of compatible conductor; 7 ... 16 mm | <a href="http://www.wago.com/790-116">www.wago.com/790-116</a> |
|  | <b>Item no.: 790-124</b><br>Shield clamping saddle; 27 mm wide; diameter of compatible conductor; 6 ... 24 mm | <a href="http://www.wago.com/790-124">www.wago.com/790-124</a> |
|  | <b>Item no.: 790-108</b><br>Shield clamping saddle; 11 mm wide; diameter of compatible conductor; 3 ... 8 mm  | <a href="http://www.wago.com/790-108">www.wago.com/790-108</a> |
|  | <b>Item no.: 790-140</b><br>Shield clamping saddle; diameter of compatible conductor                          | <a href="http://www.wago.com/790-140">www.wago.com/790-140</a> |
|  | <b>Item no.: 790-216</b><br>Shield clamping saddle; 21.8 mm wide; 6 ... 16 mm                                 | <a href="http://www.wago.com/790-216">www.wago.com/790-216</a> |
|  | <b>Item no.: 790-220</b><br>Shield clamping saddle; 30 mm wide; 6 ... 20 mm                                   | <a href="http://www.wago.com/790-220">www.wago.com/790-220</a> |

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.

**Item no.: 790-208**  
Shield clamping saddle; 12.4 mm wide; 3 ... 8 mm

[www.wago.com/790-208](http://www.wago.com/790-208)

**Carrier rail**

Mounting accessories



**Item no.: 210-197**  
Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; slotted; similar to EN 60715; silver-colored

[www.wago.com/210-197](http://www.wago.com/210-197)



**Item no.: 210-198**  
Copper carrier rail; 35 x 15 mm; 2.3 mm thick; 2 m long; unslotted; according to EN 60715; copper-colored

[www.wago.com/210-198](http://www.wago.com/210-198)



**Item no.: 210-504**  
Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; galvanized; according to EN 60715; silver-colored

[www.wago.com/210-504](http://www.wago.com/210-504)



**Item no.: 210-505**  
Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; unslotted; galvanized; according to EN 60715; silver-colored

[www.wago.com/210-505](http://www.wago.com/210-505)




**Item no.: 210-506**  
Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; unslotted; galvanized; similar to EN 60715; silver-colored

[www.wago.com/210-506](http://www.wago.com/210-506)



**Item no.: 210-508**  
Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; slotted; galvanized; similar to EN 60715; silver-colored

[www.wago.com/210-508](http://www.wago.com/210-508)



**Item no.: 210-113**  
Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; unslotted; according to EN 60715; silver-colored

[www.wago.com/210-113](http://www.wago.com/210-113)



**Item no.: 210-118**  
Steel carrier rail; 35 x 15 mm; 2.3 mm thick; 2 m long; unslotted; according to EN 60715; silver-colored

[www.wago.com/210-118](http://www.wago.com/210-118)



**Item no.: 210-112**  
Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; according to EN 60715; "Hole width 25 mm; silver-colored

[www.wago.com/210-112](http://www.wago.com/210-112)




**Item no.: 210-114**  
Steel carrier rail; 35 x 15 mm; 1.5 mm thick; 2 m long; unslotted; similar to EN 60715; silver-colored

[www.wago.com/210-114](http://www.wago.com/210-114)



**Item no.: 210-115**  
Steel carrier rail; 35 x 7.5 mm; 1 mm thick; 2 m long; slotted; according to EN 60715; "Hole width 18 mm; silver-colored

[www.wago.com/210-115](http://www.wago.com/210-115)



**Item no.: 210-196**  
Aluminum carrier rail; 35 x 8.2 mm; 1.6 mm thick; 2 m long; unslotted; similar to EN 60715; silver-colored

[www.wago.com/210-196](http://www.wago.com/210-196)

**System housing**














System enclosure



**Item no.: 850-814/002-000**  
IP65 enclosure; Sheet steel (RAL 7035); WxHxD (200x120x200 mm); without flange plate

[www.wago.com/850-814/002-000](http://www.wago.com/850-814/002-000)

Subject to changes. Please also observe the further product documentation!

|  |  |  |
|--|--|--|
|    | <b>Item no.: 850-815/002-000</b><br>IP65 enclosure; Sheet steel (RAL 7035); WxHxD (300x120x200 mm); without flange plate                 | <a href="http://www.wago.com/850-815/002-000">www.wago.com/850-815/002-000</a> |
|    | <b>Item no.: 850-816/002-000</b><br>IP65 enclosure; Sheet steel (RAL 7035); WxHxD (400x120x200 mm); without flange plate                 | <a href="http://www.wago.com/850-816/002-000">www.wago.com/850-816/002-000</a> |
|    | <b>Item no.: 850-817/002-000</b><br>IP65 enclosure; Sheet steel (RAL 7035); WxHxD (600x120x200 mm); without flange plate                 | <a href="http://www.wago.com/850-817/002-000">www.wago.com/850-817/002-000</a> |
|    | <b>Item no.: 850-825</b><br>IP65 enclosure; Aluminium (RAL 7032); WxHxD (160x100x160 mm); 9 x M12, 4 x M20                               | <a href="http://www.wago.com/850-825">www.wago.com/850-825</a>                 |
|    | <b>Item no.: 850-826</b><br>IP65 enclosure; Aluminium (RAL 7032); WxHxD (240x100x160 mm); 4 x M20, 4 x M16, 14 x M12 cable grip          | <a href="http://www.wago.com/850-826">www.wago.com/850-826</a>                 |
|    | <b>Item no.: 850-827</b><br>IP65 enclosure; Aluminium (RAL 7032); WxHxD (320x100x160 mm); 4 x M20, 8 x M16, 17 x M12 cable grip          | <a href="http://www.wago.com/850-827">www.wago.com/850-827</a>                 |
|    | <b>Item no.: 850-827/002-000</b><br>IP65 enclosure; Aluminium (RAL 7035); WxHxD (320x100x160 mm); 4 x M20, 8 x M16, 17 x M12 cable grip  | <a href="http://www.wago.com/850-827/002-000">www.wago.com/850-827/002-000</a> |
|   | <b>Item no.: 850-826/002-000</b><br>IP65 enclosure; Aluminium (RAL 7035); WxHxD (240x100x160 mm); 4 x M20, 4 x M16, 14 x M12 cable grip  | <a href="http://www.wago.com/850-826/002-000">www.wago.com/850-826/002-000</a> |
|  | <b>Item no.: 850-828/002-000</b><br>IP65 enclosure; Aluminium (RAL 7035); WxHxD (480x100x160 mm); 4 x M20, 10 x M16, 35 x M12 cable grip | <a href="http://www.wago.com/850-828/002-000">www.wago.com/850-828/002-000</a> |
|  | <b>Item no.: 850-828</b><br>IP65 enclosure; Aluminium (RAL 7032); WxHxD (480x100x160 mm); 4 x M20, 10 x M16, 35 x M12 cable grip         | <a href="http://www.wago.com/850-828">www.wago.com/850-828</a>                 |
|  | <b>Item no.: 850-834</b><br>IP65 enclosure; Polyester (RAL 7032); WxHxD (164x100x164 mm); 9 x M12, 4 x M20                               | <a href="http://www.wago.com/850-834">www.wago.com/850-834</a>                 |
|  | <b>Item no.: 850-835</b><br>IP65 enclosure; Polyester (RAL 7032); WxHxD (244x100x164 mm); 4 x M20, 4 x M16, 14 x M12 cable grip          | <a href="http://www.wago.com/850-835">www.wago.com/850-835</a>                 |
|  | <b>Item no.: 850-836</b><br>IP65 enclosure; Polyester (RAL 7032); WxHxD (324x100x164 mm); 4 x M20, 8 x M16, 17 x M12 cable grip          | <a href="http://www.wago.com/850-836">www.wago.com/850-836</a>                 |

**Marking accessories**

Marker carrier













**Item no.: 750-103**  
Group marker carrier

[www.wago.com/750-103](http://www.wago.com/750-103)

Subject to changes. Please also observe the further product documentation!



Marker

|  |   |  |
|--|---|--|
|    | <b>Item no.: 2009-145/000-006</b><br>Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; blue   | <a href="http://www.wago.com/2009-145/000-006">www.wago.com/2009-145/000-006</a> |
|    | <b>Item no.: 2009-145</b><br>Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; white          | <a href="http://www.wago.com/2009-145">www.wago.com/2009-145</a>                 |
|    | <b>Item no.: 2009-145/000-002</b><br>Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; yellow | <a href="http://www.wago.com/2009-145/000-002">www.wago.com/2009-145/000-002</a> |
|    | <b>Item no.: 2009-145/000-007</b><br>Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; gray   | <a href="http://www.wago.com/2009-145/000-007">www.wago.com/2009-145/000-007</a> |
|    | <b>Item no.: 2009-145/000-005</b><br>Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; red    | <a href="http://www.wago.com/2009-145/000-005">www.wago.com/2009-145/000-005</a> |
|    | <b>Item no.: 2009-145/000-012</b><br>Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; orange | <a href="http://www.wago.com/2009-145/000-012">www.wago.com/2009-145/000-012</a> |
|   | <b>Item no.: 2009-145/000-023</b><br>Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; green  | <a href="http://www.wago.com/2009-145/000-023">www.wago.com/2009-145/000-023</a> |
|  | <b>Item no.: 2009-145/000-024</b><br>Mini-WSB Inline; for Smart Printer; 1700 pieces on roll; stretchable 5 - 5.2 mm; plain; snap-on type; violet | <a href="http://www.wago.com/2009-145/000-024">www.wago.com/2009-145/000-024</a> |
|  | <b>Item no.: 248-501/000-006</b><br>Mini-WSB marking card; as card; not stretchable; plain; snap-on type; blue                                    | <a href="http://www.wago.com/248-501/000-006">www.wago.com/248-501/000-006</a>   |
|  | <b>Item no.: 248-501/000-007</b><br>Mini-WSB marking card; as card; not stretchable; plain; snap-on type; gray                                    | <a href="http://www.wago.com/248-501/000-007">www.wago.com/248-501/000-007</a>   |
|  | <b>Item no.: 248-501/000-002</b><br>Mini-WSB marking card; as card; not stretchable; plain; snap-on type; yellow                                  | <a href="http://www.wago.com/248-501/000-002">www.wago.com/248-501/000-002</a>   |
|  | <b>Item no.: 248-501/000-012</b><br>Mini-WSB marking card; as card; not stretchable; plain; snap-on type; orange                                  | <a href="http://www.wago.com/248-501/000-012">www.wago.com/248-501/000-012</a>   |

Subject to changes. Please also observe the further product documentation!



**Item no.: 248-501**  
Mini-WSB marking card; as card; not stretchable; plain; snap-on type; white

[www.wago.com/248-501](http://www.wago.com/248-501)



**Item no.: 248-501/000-017**  
Mini-WSB marking card; as card; not stretchable; plain; snap-on type; light green

[www.wago.com/248-501/000-017](http://www.wago.com/248-501/000-017)



**Item no.: 248-501/000-005**  
Mini-WSB marking card; as card; not stretchable; plain; snap-on type; red

[www.wago.com/248-501/000-005](http://www.wago.com/248-501/000-005)



**Item no.: 248-501/000-024**  
Mini-WSB marking card; as card; not stretchable; plain; snap-on type; violet

[www.wago.com/248-501/000-024](http://www.wago.com/248-501/000-024)



**Item no.: 248-501/000-023**  
Mini-WSB marking card; as card; not stretchable; plain; snap-on type; green

[www.wago.com/248-501/000-023](http://www.wago.com/248-501/000-023)



**Item no.: 750-100**  
Marker card; as a DIN A4 sheet; plain

[www.wago.com/750-100](http://www.wago.com/750-100)

Group marker carrier



**Item no.: 750-106**  
Group marker carrier

[www.wago.com/750-106](http://www.wago.com/750-106)

## Downloads

### Documentation

#### Manual

|  |                         |               |          |
|--|-------------------------|---------------|----------|
| 2-channel, 0-20mA, diff.   | V 1.1.0                 | pdf<br>2.2 MB | Download |
| System Manual WAGO I/O System 750 / 753<br>Decentralized Automation Technology | V 3.0.2<br>2021. 4. 27. | pdf<br>6.6 MB | Download |
| System Manual Series 750/753<br>Online HTML                                    |                         | URL           | Download |

#### Bid Text

|                                |              |               |          |
|--------------------------------|--------------|---------------|----------|
| 750-452/000-200<br>X81 - Datei | 2019. 2. 19. | xml<br>4.5 kB | Download |
|--------------------------------|--------------|---------------|----------|

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG  
Hansastr. 27  
32423 Minden  
Phone: +49571 887-0 | Fax: +49571 887-169  
Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
We are always happy to take your call at +49 (571) 887-44222.



|                                |               |                |          |
|--------------------------------|---------------|----------------|----------|
| 750-452/000-200<br>doc - Datei | 2017. 10. 17. | doc<br>28.7 kB | Download |
|--------------------------------|---------------|----------------|----------|

|                                 |               |                 |          |
|---------------------------------|---------------|-----------------|----------|
| 750-452/000-200<br>docx - Datei | 2017. 10. 17. | docx<br>17.3 kB | Download |
|---------------------------------|---------------|-----------------|----------|

**System Description**

|  |         |               |          |
|--|---------|---------------|----------|
| Use in Hazardous Environments<br>Term definition, marking and installation regulations | V 1.0.0 | pdf<br>1.0 MB | Download |
|--|---------|---------------|----------|

|   |  |                 |          |
|---|--|-----------------|----------|
| Overview on WAGO-I/O-SYSTEM 750 approvals |  | pdf<br>780.2 kB | Download |
|---|--|-----------------|----------|

|   |  |               |          |
|---|--|---------------|----------|
| 750/753 Series I/O-System – General Product Information |  | pdf<br>1.7 MB | Download |
|---|--|---------------|----------|

**Additional Information**

|  |         |                 |          |
|--|---------|-----------------|----------|
| Disposal; Electrical and electronic equipment, Packaging | V 1.0.0 | pdf<br>265.8 kB | Download |
|--|---------|-----------------|----------|

**CAD/CAE-Data**

**CAD data**

|                              |  |     |          |
|------------------------------|--|-----|----------|
| 2D/3D Models 750-452/000-200 |  | URL | Download |
|------------------------------|--|-----|----------|

**CAE data**

|                                   |  |     |          |
|-----------------------------------|--|-----|----------|
| EPLAN Data Portal 750-452/000-200 |  | URL | Download |
|-----------------------------------|--|-----|----------|

|                                |  |     |          |
|--------------------------------|--|-----|----------|
| WSCAD Universe 750-452/000-200 |  | URL | Download |
|--------------------------------|--|-----|----------|

|                              |  |     |          |
|------------------------------|--|-----|----------|
| ZUKEN Portal 750-452/000-200 |  | URL | Download |
|------------------------------|--|-----|----------|

|                                   |  |     |          |
|-----------------------------------|--|-----|----------|
| EPLAN Data Portal 750-452/000-200 |  | URL | Download |
|-----------------------------------|--|-----|----------|

|                                |  |     |          |
|--------------------------------|--|-----|----------|
| WSCAD Universe 750-452/000-200 |  | URL | Download |
|--------------------------------|--|-----|----------|

**Device Files**

**Device Driver**

Subject to changes. Please also observe the further product documentation!

WAGO Kontakttechnik GmbH & Co. KG  
 Hansastr. 27  
 32423 Minden  
 Phone: +49571 887-0 | Fax: +49571 887-169  
 Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?  
 We are always happy to take your call at +49 (571) 887-44222.



WAGO USB Service Kabel Treiber / Serie 750 und 857

6.5.3.0  
2014. 9. 10.

zip  
4.8 MB

[Download](#)

---

## Environmental Product Compliance

### Compliance Search

Environmental Product Compliance 750-452/000-200

[URL](#)

[Download](#)

2-channel analog input; 0 ... 20 mA; Differential input; S5 PLC data format

---

## Installation Notes

## Product family

**750/753 Series I/O System**

[Show all products from the family](#)

Subject to changes. Please also observe the further product documentation!

---

WAGO Kontakttechnik GmbH & Co. KG

Hansastr. 27

32423 Minden

Phone: +49571 887-0 | Fax: +49571 887-169

Email: [info.de@wago.com](mailto:info.de@wago.com) | Web: [www.wago.com](http://www.wago.com)

Do you have any questions about our products?

We are always happy to take your call at +49 (571) 887-44222.