




P.C.B LAYOUT

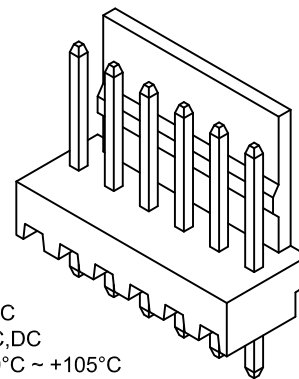

**SPECIFICATIONS:**  
 Current Rating: 3A AC,DC  
 Voltage Rating: 250V AC,DC  
 Temperature Range: -40°C ~ +105°C  
 Contact Resistance: 20mΩ Max  
 Insulation Resistance: 1000MΩ Min  
 Withstanding Voltage: 1000V AC/minute  
 Pin Material: Brass/Tin over Nickel  
 Material: Nylon 66, UL94V-0(White)

Ordering Information & Dimensions

Circuits	Dimensions(mm)		Circuits	Dimensions(mm)	
	A	B		A	B
2P	2.50	5.00	12P	27.50	30.00
3P	5.00	7.50	13P	30.00	32.50
4P	7.50	10.00	14P	32.50	35.00
5P	10.00	12.50	15P	35.00	37.50
6P	12.50	15.00	16P	37.50	40.00
7P	15.00	17.50	17P	40.00	42.50
8P	17.50	20.00	18P	42.50	45.00
9P	20.00	22.50	19P	45.00	47.50
10P	22.50	25.00	20P	47.50	50.00
11P	25.00	27.50			

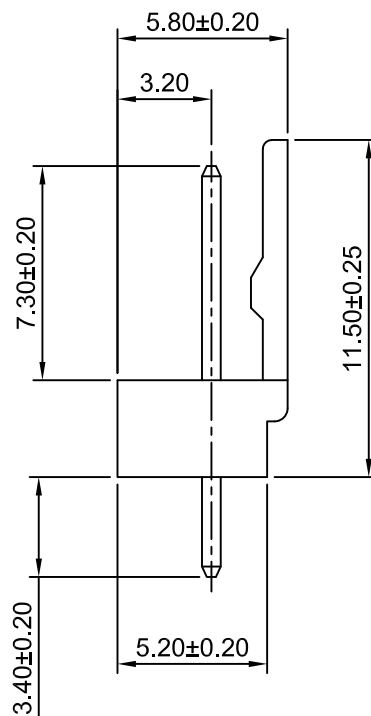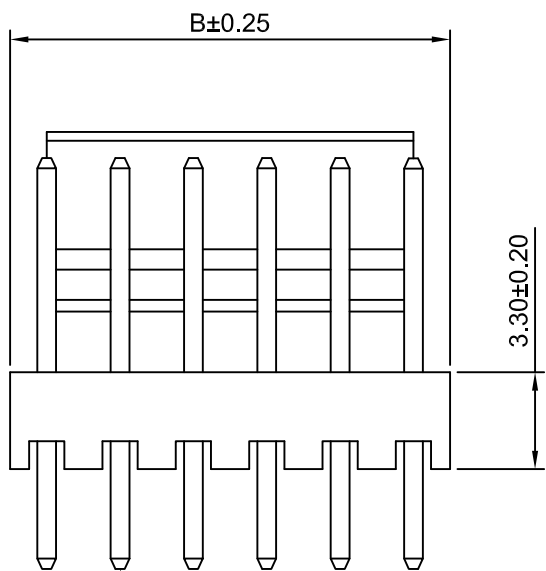

CHANGJIANG CONNECTORS CO.,LTD.

Unit	Scale	Sheet
mm	4:1	1 of 1
Draw BY:	Approved :	
Tony Su	Jack Yin	

Title :  
**2.50mm PITCH**  
**180° WAFER**

REV	DESCRIPTION	DATE	General Tolerance	ANGLE±
A1	CHANGE THE DRAWING	2017.02.14	x.xs≤0.25	
A0	NEW RELEESE	2005.05.10	x.xxx≤0.20	
			x.xxxx≤0.15	

DRAW NO : **C2504WV-XP**      REV **A1**