

part number: description:

10-01235

Cable, 610 mm, 5.5x2.5x12mm 50-00026 plug to 5.5x2.5mm 50-00027 jack, 18 AWG,

UL2468, 30-00007 wire

date: September 13, 2012

rev: A page: 1 of 2


Specifications:

connector description (1)	dc plug, 5.5x2.5xL23 mm, molding style, spring contacts, P/N 50-00026
overmold (2)	30P, PVC, black
wire description (3)	2C, 18 AWG, UL2468, 300V, 80C, 4.4 mm, VW-1, PVC, 48P, P/N 30-00007
cable outer diameter	Ø4.4 mm
cable color	black
cable length	610 ± 20 mm
twist tie (4)	black
overmold (5)	inner: 30P, PVC, black; outer: 60P, PVC, black
connector description (6)	dc jack, 5.5x2.5xL17.4 mm, molding style, P/N 50-00027

Notes:

Function test: no open, no reversed polarity, no short circuit, no INT RoHS compliant

Mechanical drawing:

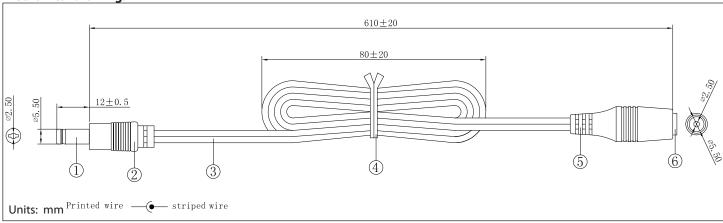

tolerance X: ±0.5 mm .X: ±0.3 mm .XX: ±0.05 mm applicable unless otherwise indicated in specification or on drawings Tensility International Corporation reserves the right to substitute parts which are functionally equivalent to the ones specified.

Initial Date



10-01235

Cable, 610 mm, 5.5x2.5x12mm 50-00026 plug to 5.5x2.5mm 50-00027 jack, 18 AWG,

UL2468, 30-00007 wire

date: September 13, 2012

rev: A page: 2 of 2

Day	:-	:	motors
rev	15	ion	notes:

Rev	Date	Description
Α	September 13, 2012	initial release

Specification Approval

Spec sign-off verifies that you have reviewed the entire specification, tested a sample of the product, and confirm that it meets your requirements. This specification reflects the part as it will be ordered. Orders will not be processed until the specification pages have been initialed and the approval page has been signed. This specification is confidential and is not to be transmitted without prior approval from Tensility.

Signature	Title ————
Name	Date
Company	Branch