ELECTRONICS, INC.
44 FARRAND STREET
BLOOMFIELD, NJ 07003
(973) 748–5089

NTE5744 & NTE5745
Powerblock Modules
3 Phase Bride Modules

Description:

The NTE5744 and NTE5745 powerblock modules are designed for three–phase full wave rectification and contain six diodes connected in a three–phase bridge configuration. The mounting base of the module is electrically isolated from the semiconductor elements for simple heatsink construction.

Applications:

- Inverters for AC Motors
- Power Supply Units for DC Motors
- DC Power Supply Units for Battery Chargers
- General Purpose DC Power Supply Units

Absolute Maximum Ratings:

Repetitive Peak Reverse Voltage, V_{RRM}
- **NTE5744** 800V
- **NTE5745** 1600V

Non–Repetitive Peak Reverse Voltage, V_{RSM}
- **NTE5744** 880V
- **NTE5745** 1760V


Average Output Current (50/60Hz, Sinewave), I_D
- **NTE5744** (T_C = +103°C) 100A
- **NTE5745** (T_C = +97°C) 100A


Surge Forward Current (Rated Load Conditions), I_{FSM} 1200A
Maximum I^2t for Fusing (Rated Load Conditions), I^2t . . . . . 6000A^2sec
Operating Junction Temperature Range, T_J . . . . . –40° to +150°C
Storage Temperature Range, T_{stg} . . . . . –40° to +125°C
Isolation Breakdown Voltage (RMS, Main Terminal to Case, 1sec), V_{ISO} 2500V
Thermal Resistance, Junction–to–Case, R_{thJC}
(50/60Hz Sinewave, Thermal Resistance for Total Loss) . . . . . 0.22°C/W
Thermal Resistance (With Thermal Compound), R_{thCF} . . . . . 0.06°C/W

Electrical Characteristics:

Parameter	Symbol	Test Conditions	Rating	Unit
Maximum Repetitive Peak Reverse Current NTE5744	I_{RRM}	T_J = +150°C, V_{RRM} = 800V	10	mA
NTE5745		T_J = +150°C, V_{RRM} = 1600V	20	mA
Maximum Forward Voltage Drop NTE5744	V_{FM}	T_J = +25°C, I_{FM} = 100A	1.15	V
NTE5745			1.25	V

Circuit Diagram

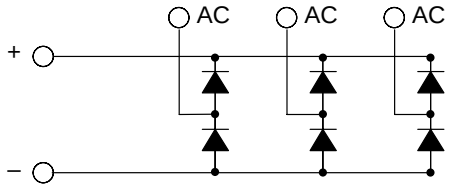

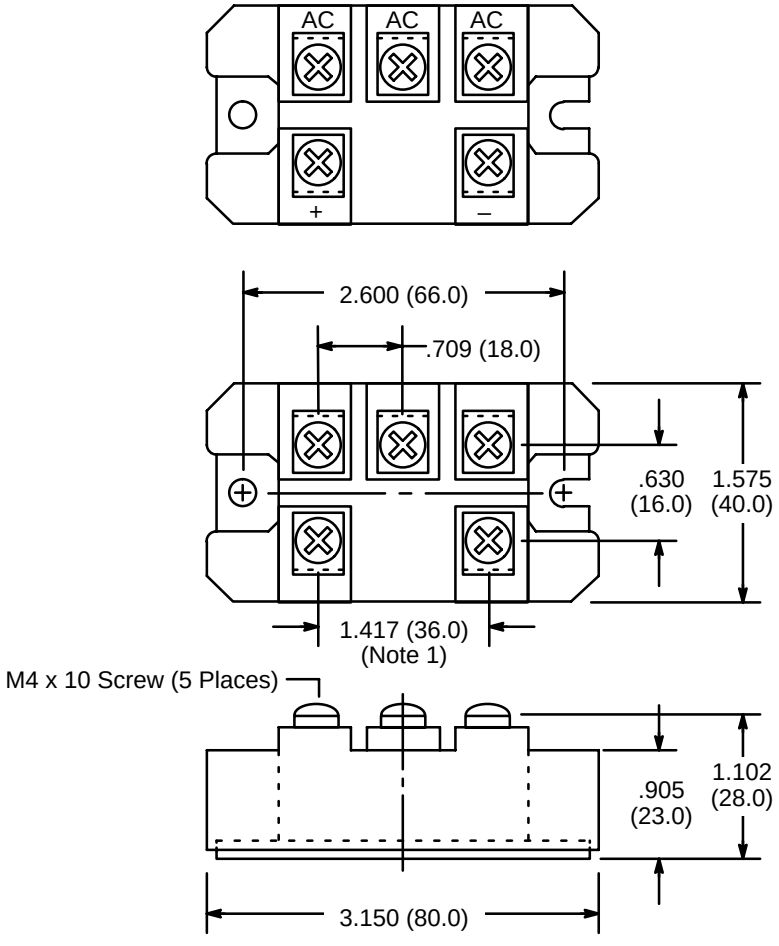

Note 1. Screws may be closer together at: 1.190 (30.0)