


LOC	DIST	REVISIONS			
		P	LTR	DATE	DWN APVD
AD	00		L2	11MAR11	RK HMR
		REVISED PER ECO-11-004820			

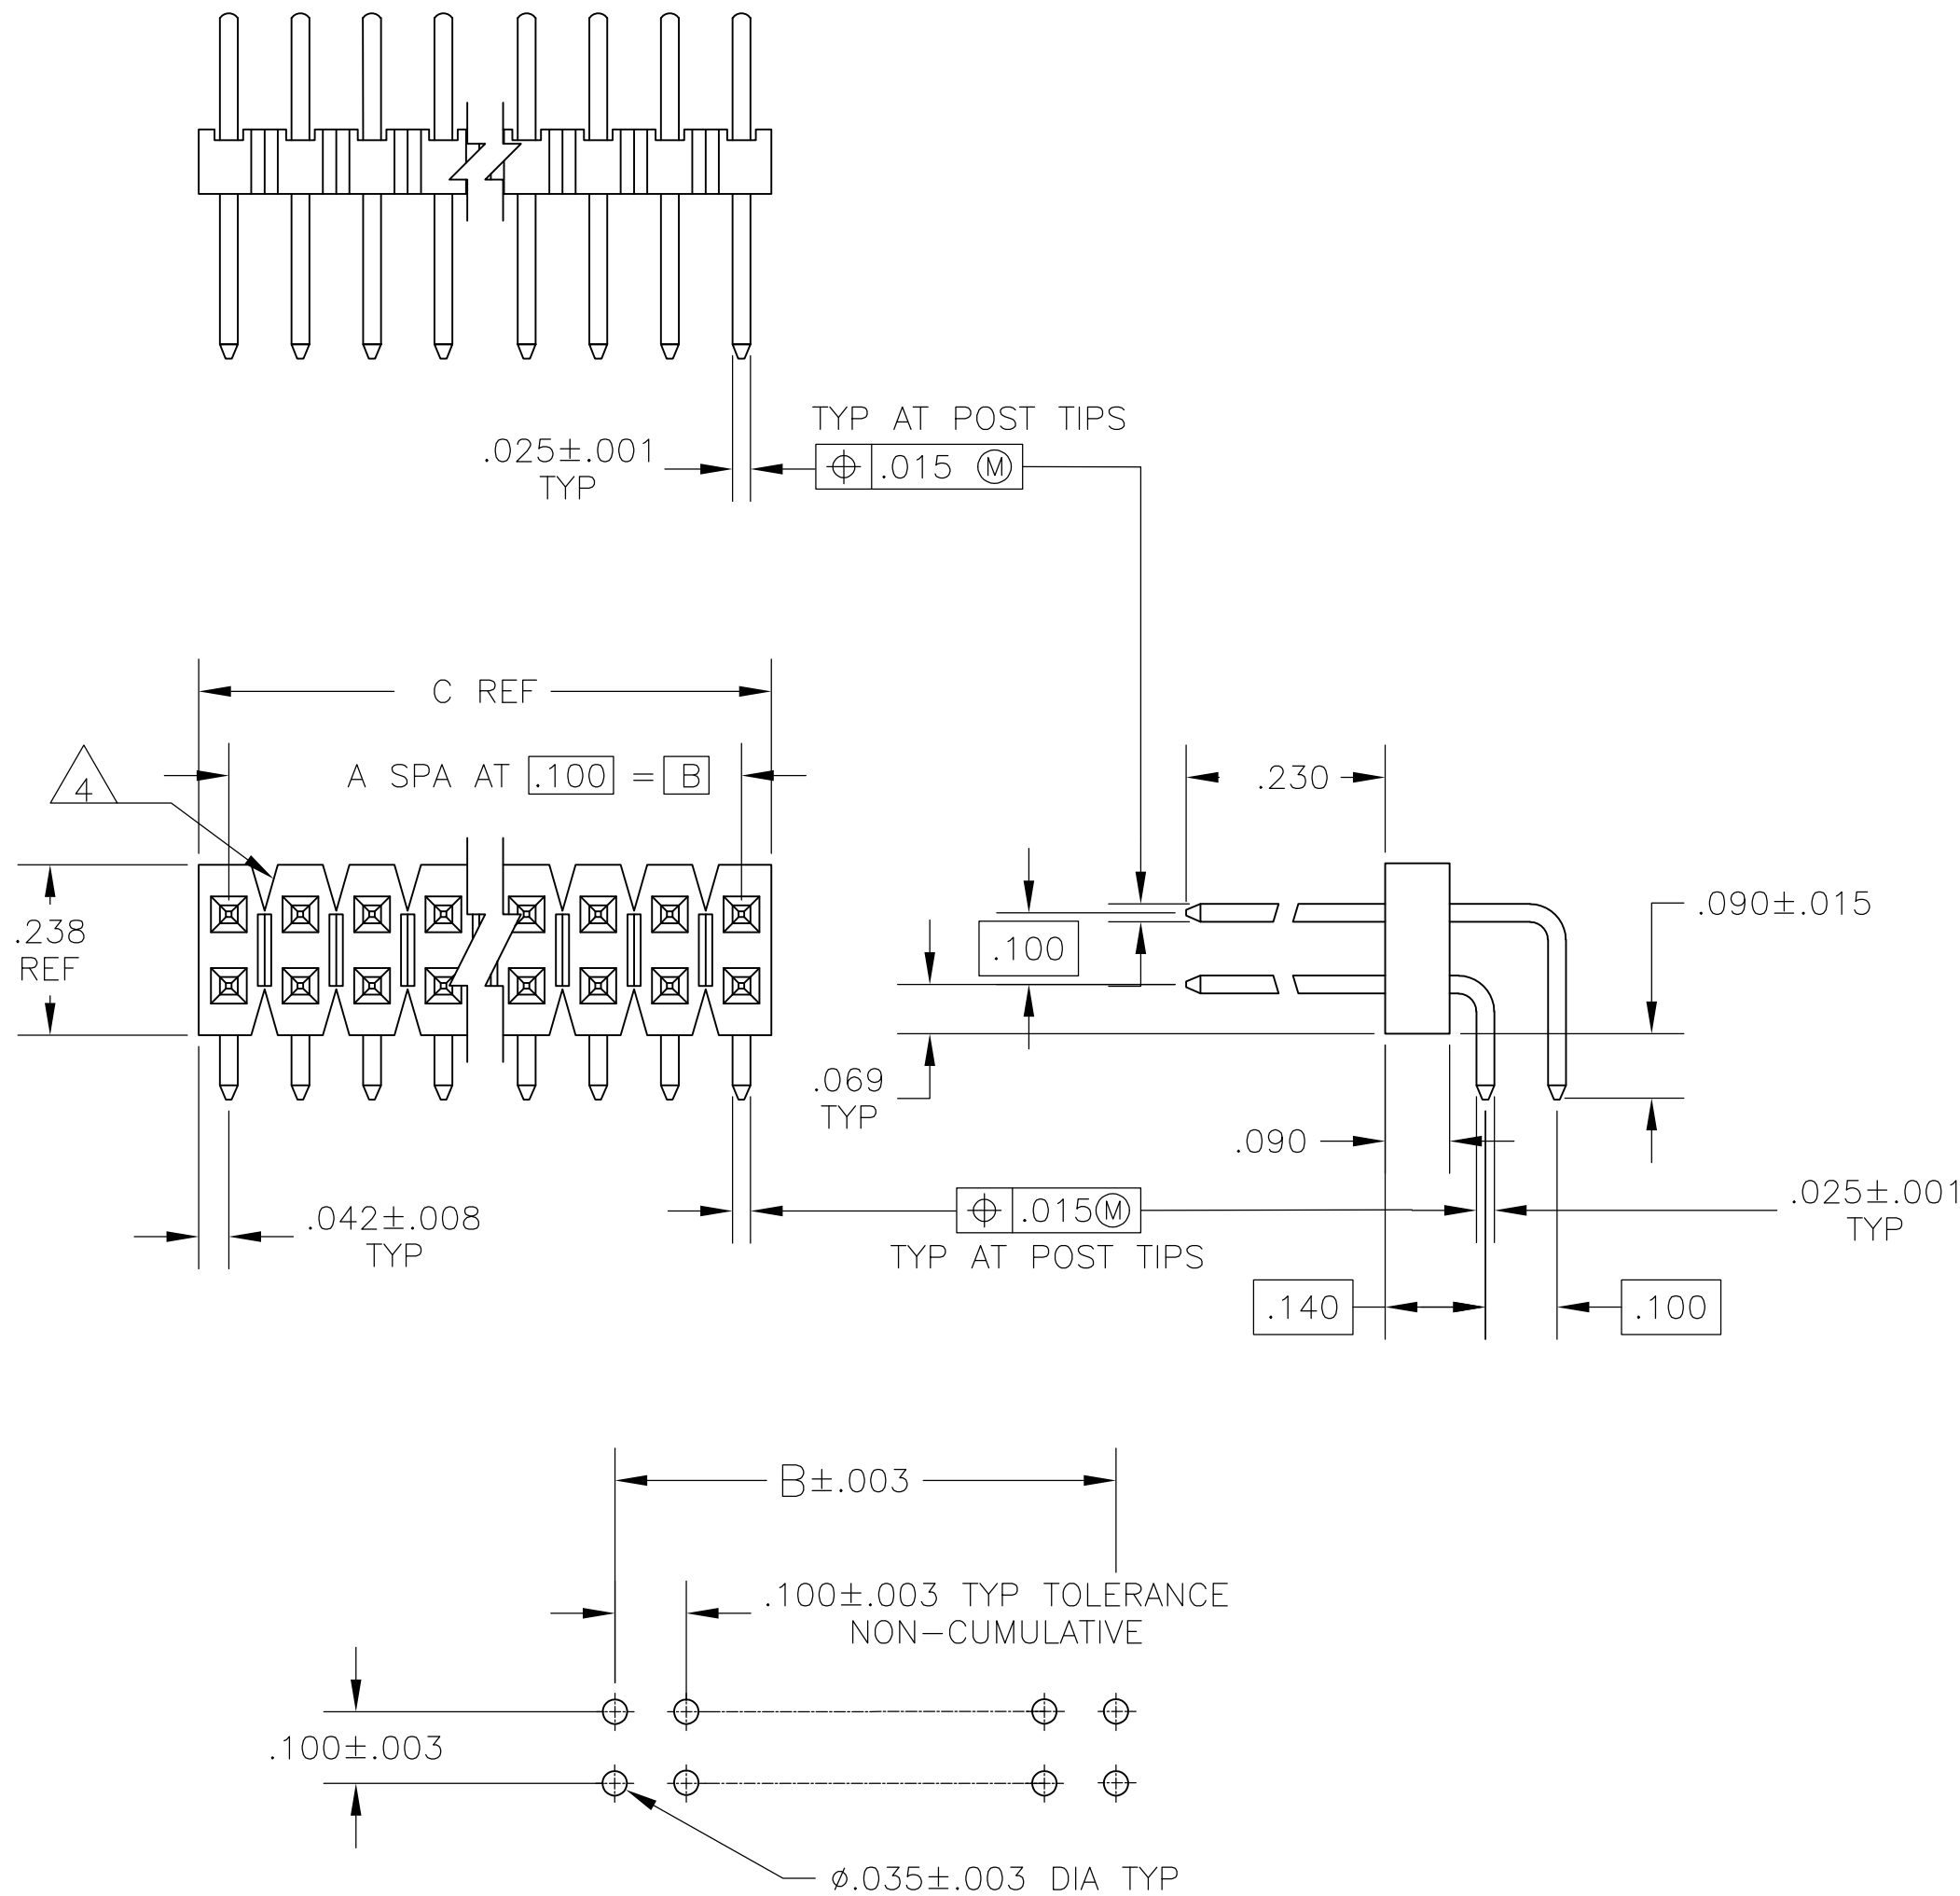

RECOMMENDED HOLE LAYOUT

- 1 ASSEMBLIES MAY BE BROKEN TO THE DESIRED NUMBER OF POSITIONS
- 2 TRUE POSITION TOLERANCE OF THE POST TIPS APPLIES WHEN THE HEADERS ARE HELD FLAT AGAINST THE PRINTED CIRCUIT BOARD
- 3 $.000100-.000200$ MATTE TIN-LEAD OVER $.000050$ NICKEL ENTIRE POST
- 4 BREAKAWAY NOTCH ANGLE CAN BE ORIENTED TO THE RIGHT (AS SHOWN) OR TO THE LEFT
- 5 $.000100-.000200$ BRIGHT TIN OVER $.000050$ NICKEL ENTIRE POST
- 6 PRELIMINARY PART-NOT RELEASED FOR PRODUCTION.
- 7 $.000100-.000200$ MATTE TIN OVER $.000050$ NICKEL ENTIRE POST
- 8 HIGH TEMP CONFIGURATION
- 9 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI


THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN L. D. RINGLEY 30JUL85	TE Connectivity	
		CHK J. GESFORD 27AUG03		
DIMENSIONS: INCHES		APVD J. GESFORD 27AUG03	NAME	
		PRODUCT SPEC	ASSEMBLY, MOD II, HEADER, BREAKAWAY, DOUBLE ROW, RIGHT ANGLE, .100X.100 C/L, WITH .025 SQ. POSTS	
		APPLICATION SPEC		
MATERIAL -		WEIGHT -	SIZE A2	CAGE CODE 00779
TOLERANCES UNLESS OTHERWISE SPECIFIED:		DRAWING NO C=103795		
0 PLC ± -		RESTRICTED TO		
1 PLC ± -		-		
2 PLC ± -				
3 PLC ± .005				
4 PLC ± -				
ANGLES ± -				
FINISH SEE TABLE		SCALE 4:1		
		SHEET 1 OF 2		
		REV L2		

THIS DRAWING IS UNPUBLISHED.	RELEASED FOR PUBLICATION	- , - .
© COPYRIGHT - By -	ALL RIGHTS RESERVED.	

LOC	DIST	REVISIONS					
AD	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
			—	SEE SHEET 1	—	—	—

OBSOLETE	8	7	3.984	3.900	39	80	9-103795-0
	8	7	3.884	3.800	38	78	8-103795-9
	8	7	3.784	3.700	37	76	8-103795-8
	8	7	3.684	3.600	36	74	8-103795-7
	8	7	3.584	3.500	35	72	8-103795-6
	8	7	3.484	3.400	34	70	8-103795-5
	8	7	3.284	3.300	33	68	8-103795-4
	8	7	3.284	3.200	32	66	8-103795-3
	8	7	3.184	3.100	31	64	8-103795-2
	8	7	3.084	3.000	30	62	8-103795-1
	8	7	2.984	2.900	29	60	8-103795-0
	8	7	2.884	2.800	28	58	7-103795-9
	8	7	2.784	2.700	27	56	7-103795-8
	8	7	2.684	2.600	26	54	7-103795-7
	8	7	2.584	2.500	25	52	7-103795-6
	8	7	2.484	2.400	24	50	7-103795-5
	8	7	2.384	2.300	23	48	7-103795-4
	8	7	2.284	2.200	22	46	7-103795-3
	8	7	2.184	2.100	21	44	7-103795-2
	8	7	2.084	2.000	20	42	7-103795-1
	8	7	1.984	1.900	19	40	7-103795-0
8	7	1.884	1.800	18	38	6-103795-9	
OBSOLETE	8	7	1.784	1.700	17	36	6-103795-8
	8	7	1.684	1.600	16	34	6-103795-7
	8	7	1.584	1.500	15	32	6-103795-6
	8	7	1.484	1.400	14	30	6-103795-5
	8	7	1.384	1.300	13	28	6-103795-4
OBSOLETE	8	7	1.284	1.200	12	26	6-103795-3
	8	7	1.184	1.100	11	24	6-103795-2
OBSOLETE	8	7	1.084	1.000	10	22	6-103795-1
OBSOLETE	8	7	.984	.900	9	20	6-103795-0
	8	7	.884	.800	8	18	5-103795-9
	8	7	.784	.700	7	16	5-103795-8
OBSOLETE	8	7	.684	.600	6	14	5-103795-7
OBSOLETE	8	7	.584	.500	5	12	5-103795-6
OBSOLETE	8	7	.484	.400	4	10	5-103795-5
OBSOLETE	8	7	.384	.300	3	8	5-103795-4
	8	7	.284	.200	2	6	5-103795-3
	8	7	.184	.100	1	4	5-103795-2
	8	7	.084	——	——	2	5-103795-1
	REMARKS	PLATING	C	B	A	NO OF POS	ASSEMBLY PART NUMBER

			.384	.300	3	8	4-103795-1	
			3.984	3.900	39	80	4-103795-0	
 OBSOLETE			3.884	3.800	38	78	3-103795-9	
			3.784	3.700	37	76	3-103795-8	
			3.684	3.600	36	74	3-103795-7	
			3.584	3.500	35	72	3-103795-6	
			3.484	3.400	34	70	3-103795-5	
			3.284	3.300	33	68	3-103795-4	
			3.284	3.200	32	66	3-103795-3	
			3.184	3.100	31	64	3-103795-2	
			3.084	3.000	30	62	3-103795-1	
			2.984	2.900	29	60	3-103795-0	
			2.884	2.800	28	58	2-103795-9	
			2.784	2.700	27	56	2-103795-8	
			2.684	2.600	26	54	2-103795-7	
			2.584	2.500	25	52	2-103795-6	
			2.484	2.400	24	50	2-103795-5	
			2.384	2.300	23	48	2-103795-4	
			2.284	2.200	22	46	2-103795-3	
			2.184	2.100	21	44	2-103795-2	
			2.084	2.000	20	42	2-103795-1	
	 OBSOLETE			1.984	1.900	19	40	2-103795-0
			1.884	1.800	18	38	1-103795-9	
		SUPERSEDED		1.784	1.700	17	36	1-103795-8
			1.684	1.600	16	34	1-103795-7	
			1.584	1.500	15	32	1-103795-6	
 OBSOLETE			1.484	1.400	14	30	1-103795-5	
			1.384	1.300	13	28	1-103795-4	
			1.284	1.200	12	26	1-103795-3	
		OBSOLETE		1.184	1.100	11	24	1-103795-2
		OBSOLETE		1.084	1.000	10	22	1-103795-1
	OBSOLETE		.984	.900	9	20	1-103795-0	
 OBSOLETE			.884	.800	8	18	103795-9	
			.784	.700	7	16	103795-8	
			.684	.600	6	14	103795-7	
 OBSOLETE			.584	.500	5	12	103795-6	
			.484	.400	4	10	103795-5	
			.384	.300	3	8	103795-4	
 OBSOLETE			.284	.200	2	6	103795-3	
			.184	.100	1	4	103795-2	
			.084	————	————	2	103795-1	
	REMARKS	PLATING	C	B	A	NO OF POS	ASSEMBLY PART NUMBER	

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN L. D. RINGLEY 30JUL85		 TE Connectivity							
		CHK J. GESFORD 27AUG03									
DIMENSIONS: INCHES		TOLERANCES UNLESS OTHERWISE SPECIFIED:		NAME ASSEMBLY, MOD II, HEADER, BREAKAWAY, DOUBLE ROW, RIGHT ANGLE, .100X.100 C/L, WITH .025 SQ. POSTS							
		APVD J. GESFORD 27AUG03									
		PRODUCT SPEC									
		APPLICATION SPEC									
MATERIAL		FINISH		SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO				
-		SEE TABLE		WEIGHT	-	A2 00779	C-103795	-			
CUSTOMER DRAWING						SCALE	1:1	SHEET	2 of 2	REV	L2