2SD2216


Silicon NPN epitaxial planer type

For general amplification
Complementary to 2SB1462

Features

- High foward current transfer ratio h_{FE}.
- Low collector to emitter saturation voltage $V_{CE(sat)}$.
- SS-Mini type package, allowing downsizing of the equipment and automatic insertion through the tape packing.

Unit: mm

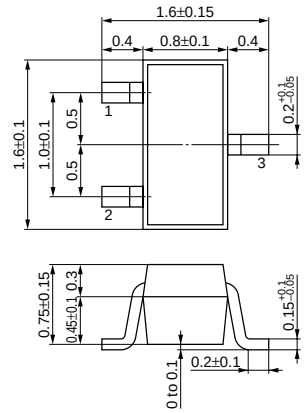

1:Base
2:Emitter
3:Collector

EIAJ:SC–75
SS–Mini Type Package

Marking symbol : Y

Absolute Maximum Ratings (Ta=25˚C)

Parameter	Symbol	Ratings	Unit
Collector to base voltage	V_{CBO}	60	V
Collector to emitter voltage	V_{CEO}	50	V
Emitter to base voltage	V_{EBO}	7	V
Peak collector current	I_{CP}	200	mA
Collector current	I_C	100	mA
Collector power dissipation	P_C	125	mW
Junction temperature	T_j	125	˚C
Storage temperature	T_{stg}	–55 ~ +125	˚C


Electrical Characteristics (Ta=25˚C)

Parameter	Symbol	Conditions	min	typ	max	Unit
Collector cutoff current	I_{CBO}	V_{CB} = 20V, I_E = 0			0.1	µA
	I_{CEO}	V_{CE} = 10V, I_B = 0			100	µA
Collector to base voltage	V_{CBO}	I_C = 10µA, I_E = 0	60			V
Collector to emitter voltage	V_{CEO}	I_C = 100µA, I_B = 0	50			V
Emitter to base voltage	V_{EBO}	I_E = 10µA, I_C = 0	7			V
Forward current transfer ratio	h_{FE1}*	V_{CE} = 10V, I_C = 2mA	160		460	
	h_{FE2}	V_{CE} = 2V, I_C = 100mA	90			
Collector to emitter saturation voltage	$V_{CE(sat)}$	I_C = 100mA, I_B = 10mA		0.1	0.3	V
Transition frequency	f_T	V_{CB} = 10V, I_E = –2mA, f = 200MHz		150		MHz
Collector output capacitance	C_{ob}	V_{CB} = 10V, I_E = 0, f = 1MHz		3.5		pF


*h_{FE1} Rank classification

Rank	Q	R	S
h_{FE1}	160 ~ 260	210 ~ 340	290 ~ 460
Marking Symbol	YQ	YR	YS


P_C — Ta

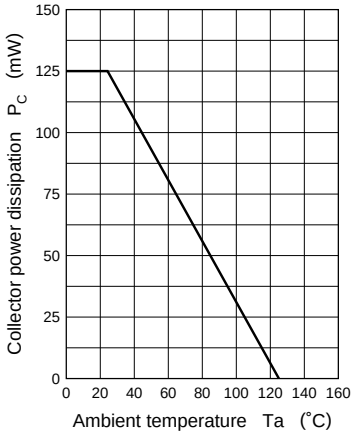


I_C — V_{CE}

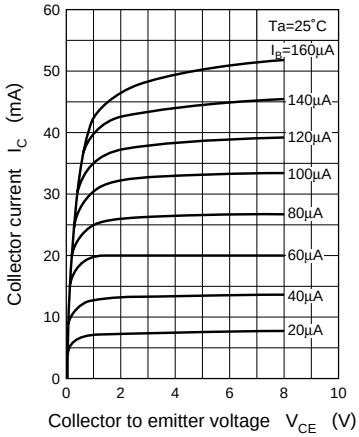


I_B — V_{BE}

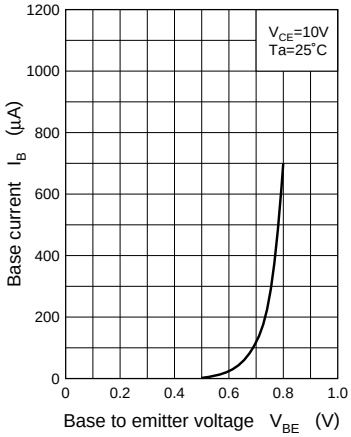


I_C — V_{BE}

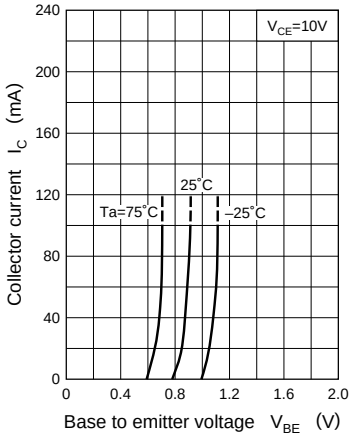


I_C — I_B

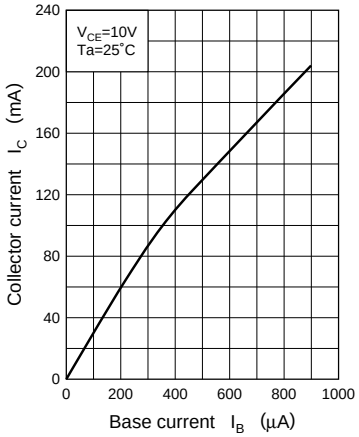

$V_{CE(sat)}$ — I_C

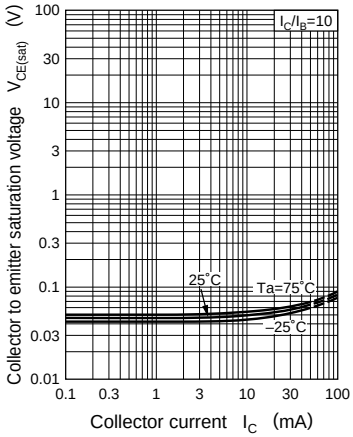

h_{FE} — I_C

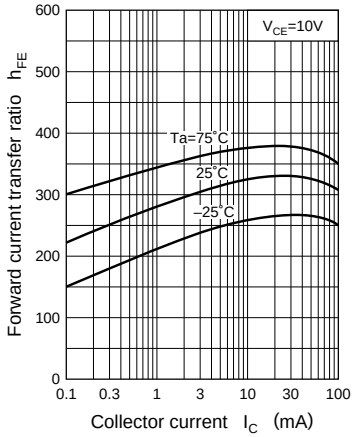

f_T — I_E

