


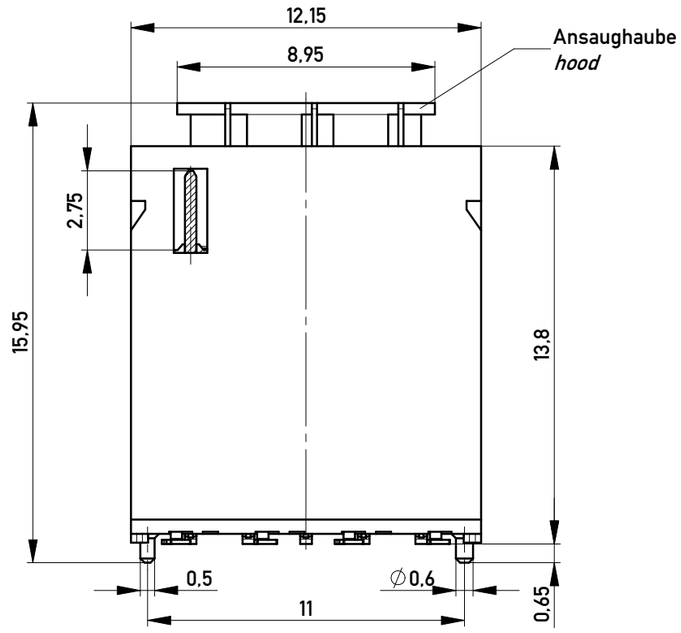


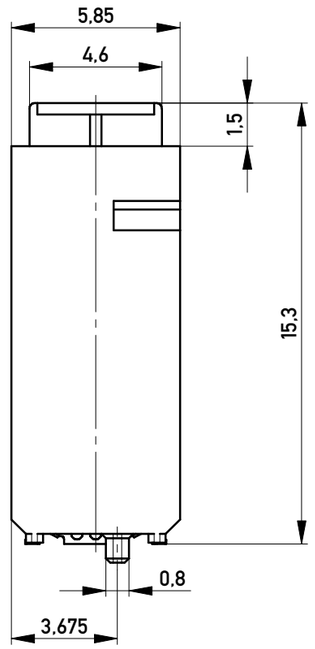

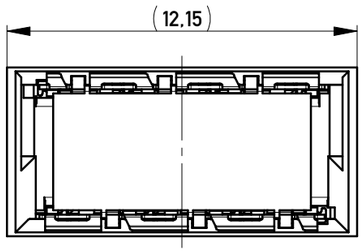


ohne Ansaughaube
without hood

Leiterplatten-Layout Vorschlag / *PCB-layout proposal*

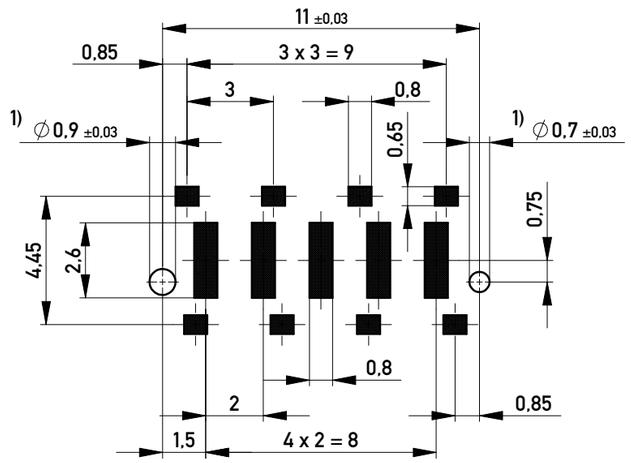


1) Durchmesser des Bohrers / *drill tool*

Verpackt im Gurt nach DIN IEC 60286-3
Tape on Reel Packaging according to DIN IEC 60286-3
Verpackungseinheit: 220 Stück
Packaging unit: 220 pcs



Abspulrichtung - *Reel off Direction*

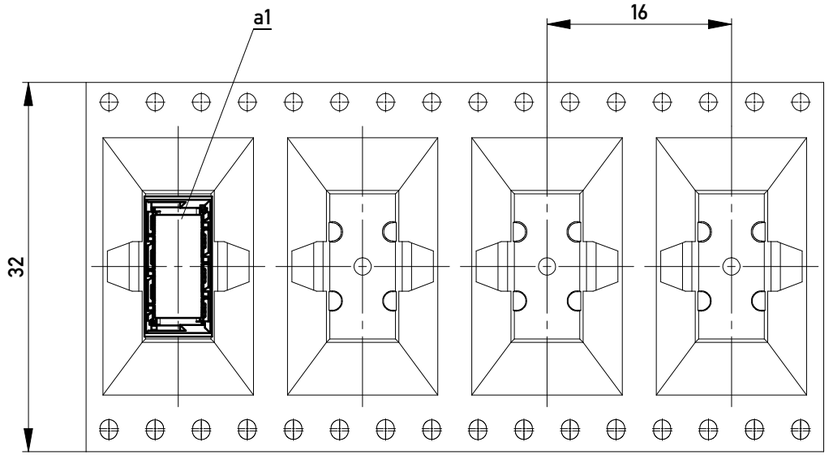

Anforderungsstufe 1
Performance Level 1

Kontaktbereich vergoldet
Mating Area gold plating

Anschlussbereich verzinnt 4-6 µm
Terminal Area 4-6 µm tin plating

Koplanarität der Anschlüsse ≤ 0,1 mm
Coplanarity Area of Termination ≤ 0,1 mm

Copyright by ERNI GmbH
Proprietary notice pursuant to ISO 16016 to be observed.

Information:	Tolerances / All Dimensions in mm	Scale 5:1	
All rights reserved. Only for Information. To ensure that this is the latest version of this drawing, please contact one of the ERNI companies before using.	Subject to modification without prior notice. Drawing will not be updated.	Designation **Messerleiste SMD, Powerm. 10mm** ***Male Con. SMD, Powerm. 10mm***	
	ERNI www.ERNI.com	**214552**	I / A3
I / Index	07.02.2014 / Date	Class MSPEED	