


PART NO.	DIM A	DIM B
BC-25-3P-170	1.7	3.05±0.2
BC-25-3P-200	2.0	3.35±0.2

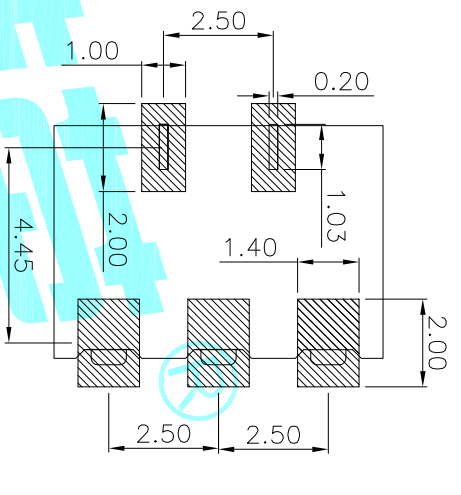

RECOMMENDED PCB LAYOUT

性能:

- 额定电流: 2.0A
- 额定电压: 12V
- 耐电压: 500V
- 接触电阻: 30mΩ
- 绝缘电阻: 500MΩ
- 工作温度: -40°C~+85°C
- 使用寿命: 5000次以上
- 塑件 (材质): LCP (黑色) UL94-V0
- 接触点 (材质): 锡磷青铜, 触点镀金3U", 焊脚镀金1U", 镍50-80U"
- 固定片 (材质): 黄铜C2680, 镀全雾锡100U"以上, 镍底50-80U"
- 环保要求: 符合ROHS限值。

②	Terminal	3	Phosphor Bronze	Au Plated		
①	Housing	1	LCP	Black		
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK
APPROVALS						
DRAWN	xu qi feng	DATE	2014.12.05	TITLE: 电池座		
CHECKED				ELECTRONICS CO.,LTD		
APPROVALS				PART NO.		
TOLERANCES ARE				30~80L ±0.30	ANGLE	SCALE: 1:1
				10~30 ±0.25		PROJ: ①
				5~10 ±0.20		SHEET 1 OF 1
				~5 ±0.15		

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		增加弹片高度尺寸 NEW			