

SYM	ECN No.	MODIFICATION	DATE	ISSUED

Note:

1. Material:

- 1.1, Housing: High temperature thermoplastic with/black g.f, UL94v-0
- 1.2, Contact: copper alloy, t=0.25mm
- 1.3, Shell: copper/Ferroalloy alloy, t=0.30mm

2. Specification:







- 2.1, Current rating: 3A Max.
- 2.2, Dielectric withstanding voltage: 100 V(ac) for 1 min.
- 2.3, Contact resistance: 30 mΩ Max.
- 2.4, Insulation resistance: 100 MΩ Min.
- 2.5, Total mating force: 3.57 Kgf Max.
- 2.6, Total unmating force: 1.0 Kgf Min.

3. Finish:

- 3.1, Contact: Plated Gold in Mating Area:
Tin On Solder Talls
Shell: Nickel Plating

4. Environmental:

- 4.1, Temperature range: -55°C~85°C

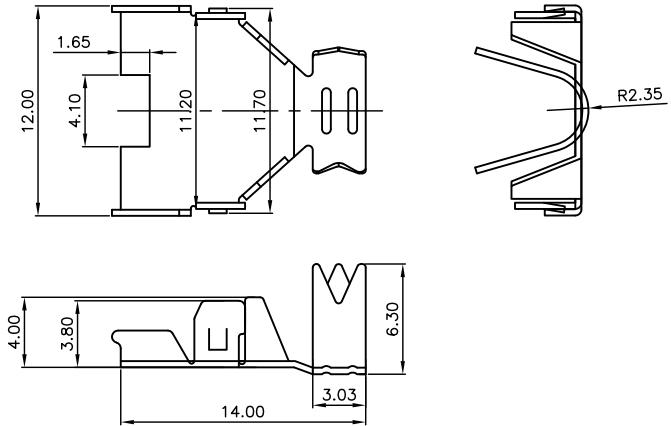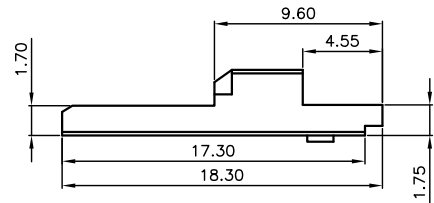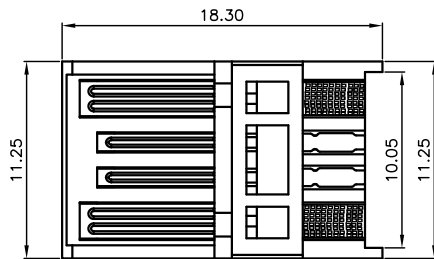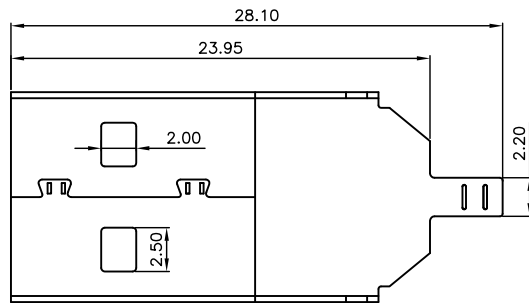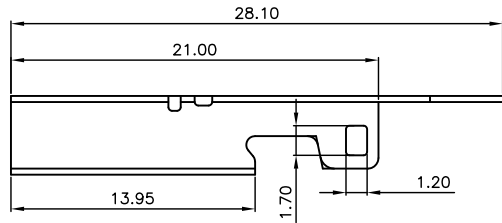

DRAWN		 深圳市精拓金电子有限公司					
CHECKED						TITLE	PART NO.
APPROVED		AM大电流三件式铁壳 PBT紫色0D4.0		917-701A115DM0400			
 3rd ANGLE PROJECTION		UNIT	TOLERANCE	SCALE	SHEET	SIZE	REV.
		mm	.XXX±.10, .XX±.15, .X±.25, ANG±1°	1:1	1 OF 1	A4	X1
			DRAWING NO. --				