


SHEET 1 OF 1


▲ SWITCH FUNCTION		
POS. 1	POS. 2	POS. 3
		
ON	NONE	ON
2-3, 5-6, 8-9	N/A	2-1, 5-4, 8-7




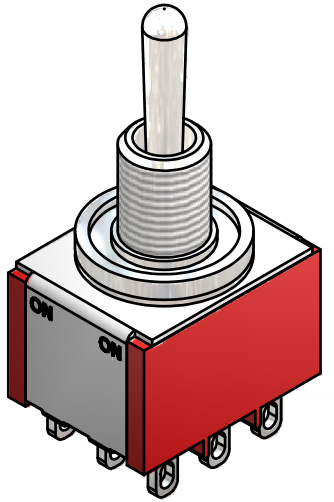

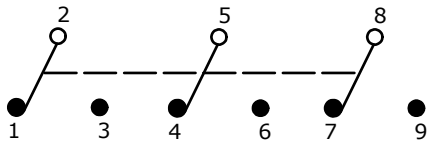

CIRCUI: 3PDT

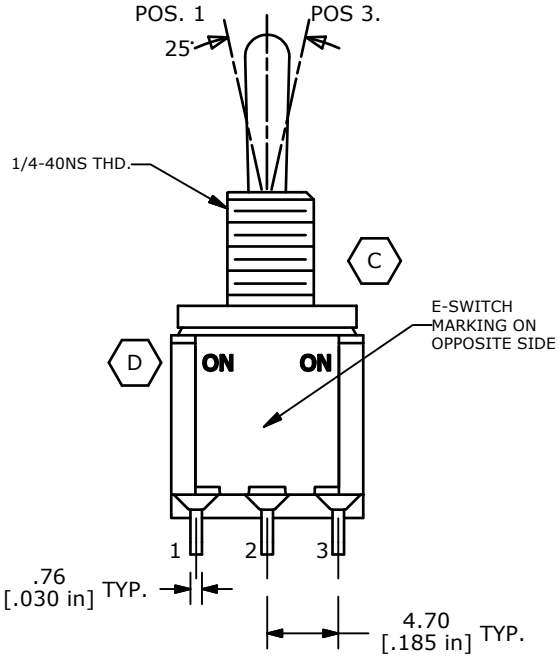

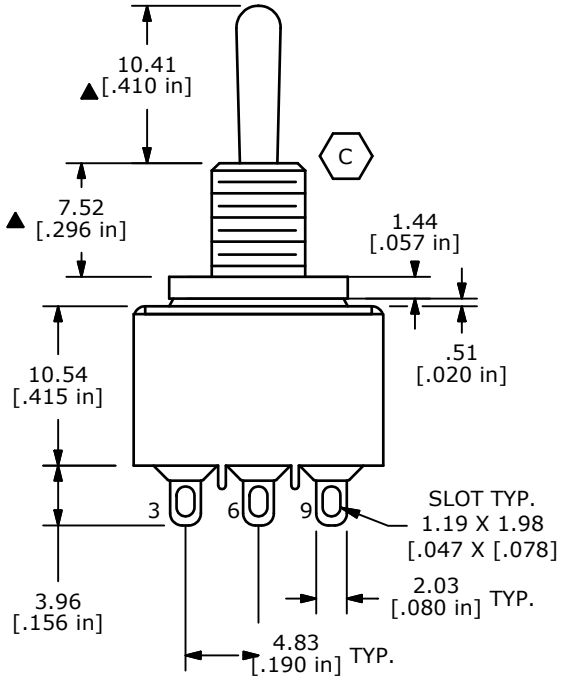

NOTE:
1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
   X.XX=±0.25
3. TERMINAL NUMBERS FOR REF ONLY
▲4. PLATING MATERIAL: SILVER
5. RATING: 2 AMPS @250VAC
   5 AMPS @120VAC OR 28VDC
6. ELECTRIC LIFE: 40,000 make-and-break cycles at full load.
7. INSULATION RESISTANCE: 1,000 Mega-ohm min.
8. DIELECTRIC STRENGTH: 1,000 V RMS @sea level.
9. OPERATING TEMP.: -30°C to 85°C
10. ▲ DENOTES CRITICAL PARAMETER.

C

REV	PCR NO	DESCRIPTION	DATE	BY
D	19694	CHANGE SWITCH FUNCTION CALLOUT	2/21/11	AR
C	14237	CORRECT RATING, CHANGE BUSHING	8/17/04	AR
B	13537	CORRECT BUSHING SHAPE	10/14/03	AR
A	13524	RELEASED FOR PRODUCTION	10/10/03	AR

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E-SWITCH®

TITLE 1003P1T1B9M1QE

SCALE	DATE	DR	DWG	REV
2:1	10/10/2003	AR	T131009	D