
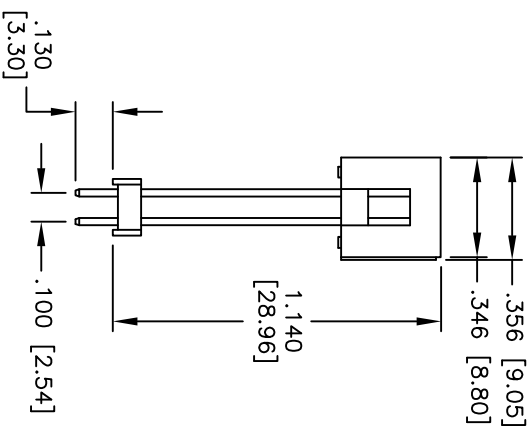
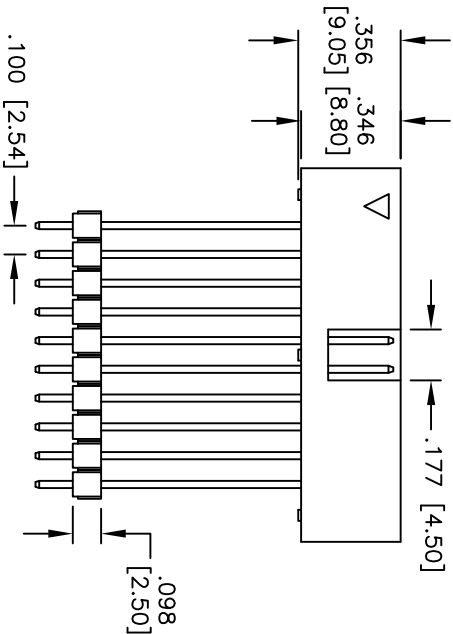
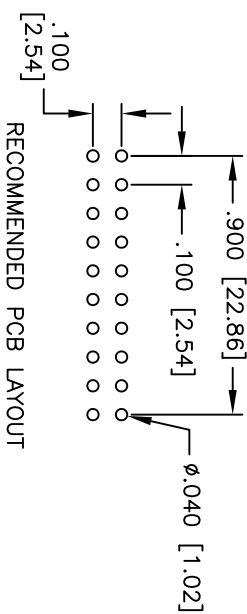


Rev	AWO #	Description	Date	Appr
-	11318	RELEASED	5/27/11	

APPROVED: _____ TITLE: _____
 DATE: _____

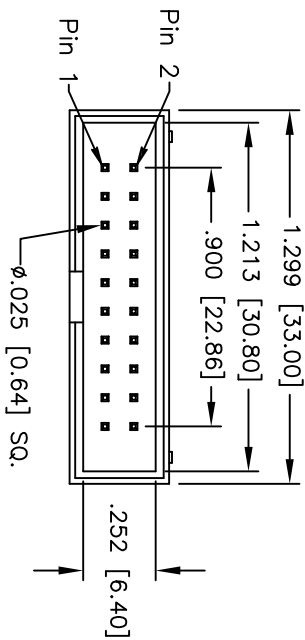

SPECIFICATIONS:

Material:

Insulator: PBT, glass reinforced, rated UL 94V-0

Insulator color: Black

Contacts: Brass

Plating:

Gold flash over nickel underplate on contact area,
 Tin over Copper underplate on tails.

Electrical:

Current rating: 3 Amp

Contact resistance: 20 mohms max. @ DC 100mA

Insulation resistance: 5,000 Mohms min. @ DC500V

Dielectric voltage: 500 VAC for 1 minute

Temperature Rating:

Operating temperature: -55°C to +105°C

Environmental:

Lead free, RoHS compliant

Recommended soldering temp: 235°C for 5 seconds



ADAM TECH

909 Railway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: .100 [2.54] BOX HEADER, STRAIGHT,
 SEL GOLD PLATED, STANDARD SOLDER TAIL

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED		INCHES		HOLES		DATE	
.X	± .10	ØXX	±.10	ØXXX	±.015		
.XX	± .020	ØXXX	±.015	ØXXX	±.010		
.XXX	± .015	ØXXX	±.010				
APPROVALS		DATE		DATE		DATE	
DRAWN	DY	5/27/11					
CHECKED							
APPROVED							
SIZE		PART NO.		REV.			
X		BHRE-20-VSGA-1.140		-			
REF: S0009T		SCALE: NTS		SHEET 1 OF 1			