
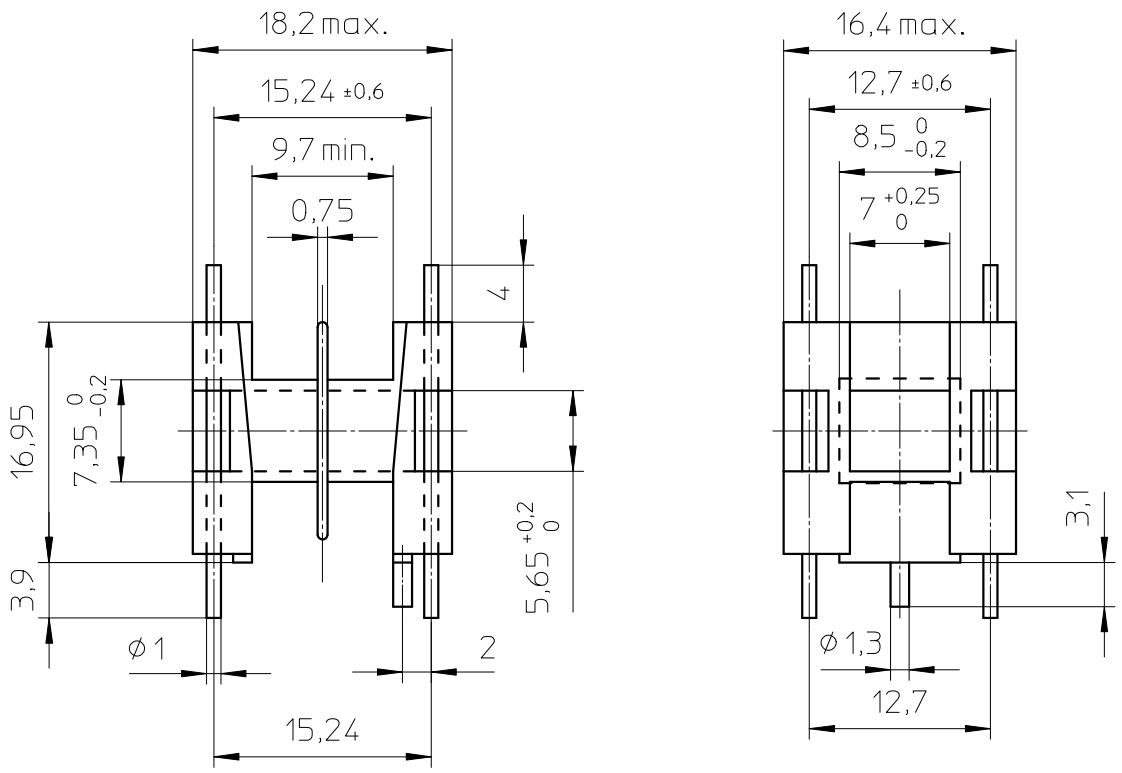


HOLE PATTERN:

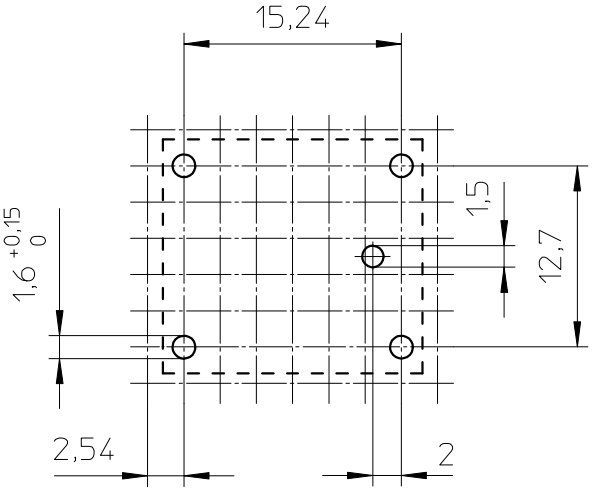

Coil former material:	Rynite FR530 (PET), glass-reinforced. UL file number: E69578(M) - UL94V-0.
Pin material:	CuSn - Ni flash, Sn plated.
Max. operating temp.:	acc. to IEC 85 class F, 155°C.
Resistance to soldering heat:	acc. to IEC 68-2-20 Part 2, Test Tb, method 1B, 350°C-3,5sec.
Solderability:	acc. to IEC 68-2-20 Part 2, Test Ta, method 1, 235°C - 2sec.
Min. winding area:	34,2 mm².
Mean length of turn:	48,7 mm.

CLASS.NO.	CPH-U15/11/6-2S-4P	4322 021 01591	~~96-05-10~~ ~~96-06-24~~ ~~96-08-29~~ ~~2004-09-28~~ 2006-06-28
96-08-29			

NAME NAAM A.Wojtasz	SUPERS. VERV.	1 SH BL. SH BL. 112 – 001	010		A4
MPA CHECK CONTR.	DAT. 95-12-07	Property of Eigendom van	© FERROXCUBE 2000		