


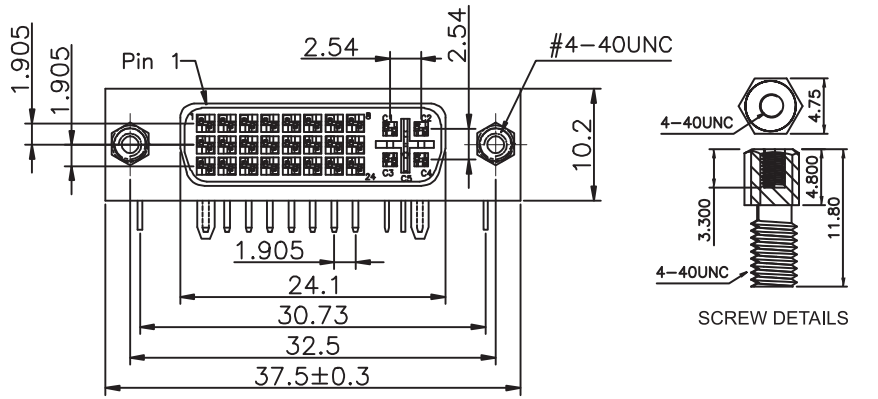


SCREW DETAILS

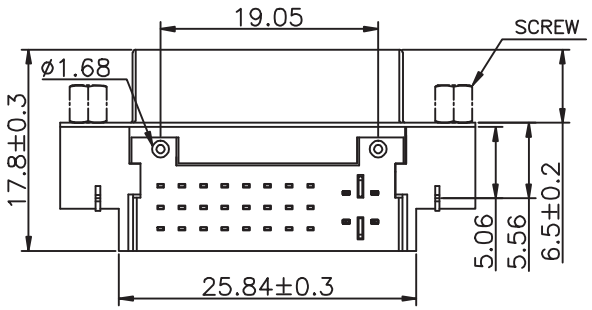



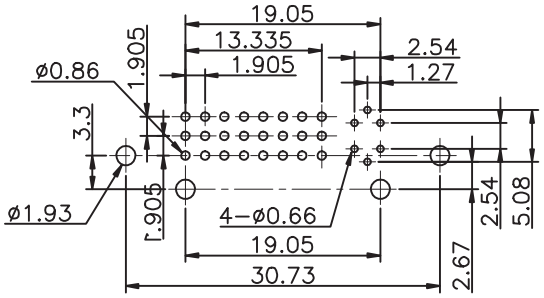

PCB LAYOUT - COMPONENT VIEW

TECHNICAL CHARACTERISTICS

MATERIAL
INSULATOR: PBT
COLOR: WHITE
CONTACT MATERIAL: COPPER ALLOY
CONTACT TYPE: STAMPED
CONTACT PLATING: SELECTIVE GOLD
SHIELDING: STEEL NICKEL PLATED
QUALITY CLASS: 100 MATING CYCLES

ENVIRONMENTAL
OPERATING TEMPERATURE: -25 UP TO 85°C
FLAMABILITY RATING: UL94-V0
COMPLIANCE: LEAD FREE AND ROHS

ELECTRICAL
CURRENT RATING: 3A
WORKING VOLTAGE: 40V
INSULATOR RESISTANCE: >1000 MOHM
DIELECTRIC WITHSTANDING VOLTAGE: 500V AC/MN
CONTACT RESISTANCE: 20 mOHM MAX

STANDARD
CERTIFIED: E323964 / MODEL NUMBER 675024321321

SOLDERING
WAVE PROCESS ONLY


MOUNTED ACCESSORIES
UNC 4-40 HEX SCREW / BOARD LOCK

PACKAGING
TRAY

RoHS Compliant

REV	DATE	FILE	BY
G			
F			
E	31-JAN-13	QUALITY CLASS	QL
D	12-AUG-11	SHIELDING	GG
C	08-JUL-10	PACKAGING	JC
B	19-NOV-09	STANDARD	JP
A	14-SEP-09	PIN BOTTOM VIEW	CH

PROJECTION:



APPROVAL: RJ

GENERAL TOLERANCE
.X = +/_ 0.2
.XX = +/_ 0.15


UNIT: MM
SCALE:
SHEET: 1/2
DRAW: PEARL

WÜRTH ELEKTRONIK


DESCRIPTION: ANALOGIC & DIGITAL ANGLED DVI UNC 4-40 SCREW

WERI PART NO: 675 024 321 321

SIZE
A4

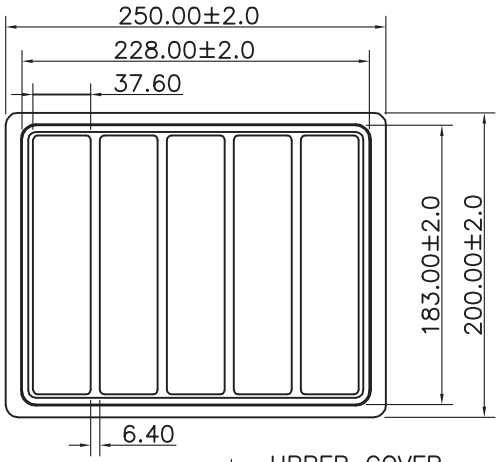



UPPER COVER

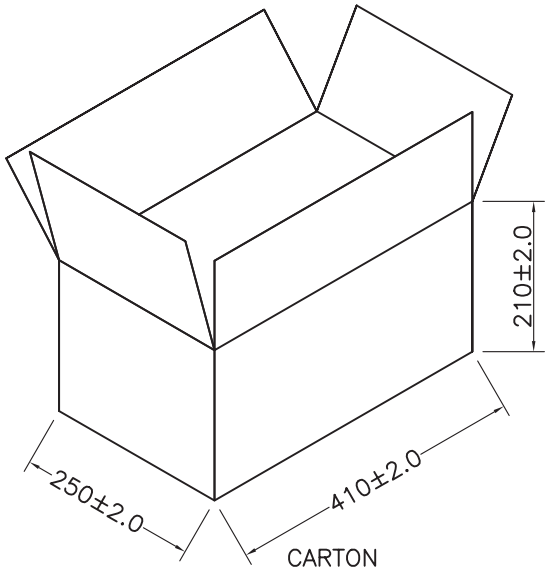

CARTON

NOTE:
50PCS/TRAY,1000PCS/BOX



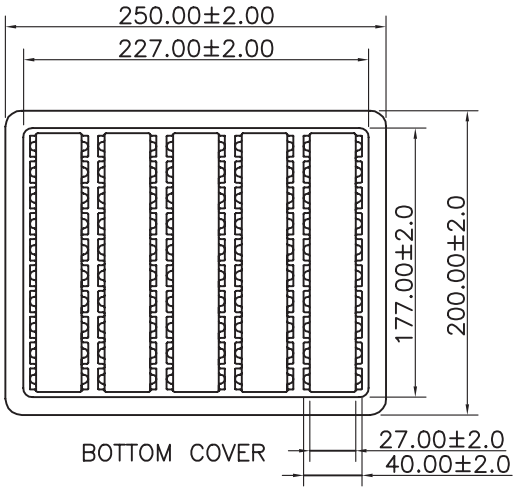

BOTTOM COVER

RoHS Compliant							
G				PROJECTION:	GENERAL TOLERANCE	WÜRTH ELEKTRONIK	
F					.X = +/_ 0.2		
E					.XX = +/_ 0.15		
D							
C				APPROVAL: RJ	UNIT: MM	DESCRIPTION: ANALOGIC & DIGITAL ANGLED DVI UNC 4-40 SCREW	SIZE
B					SCALE:		
A					SHEET: 1/2	WERI PART NO: 675 024 321 321	A4
REV	DATE	FILE	BY		DRAW: PEARL		