
Two-color detector
K3413-05/-08/-09

Wide spectral response range from UV to IR

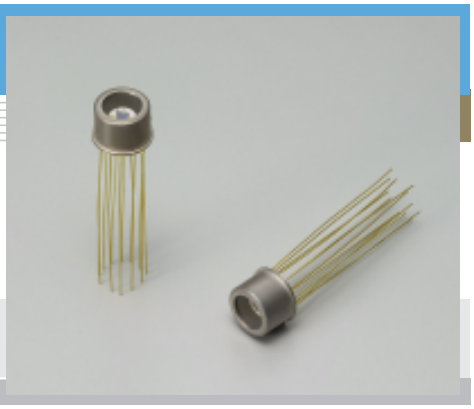

K3413-05/-08/-09 are hybrid detectors containing an infrared-transmitting Si photodiode mounted over an InGaAs PIN photodiode, along the same optical axis. This structure delivers a wide spectral response range from 0.25 µm to nearly 1.7 µm. The built-in thermoelectric cooler maintains a constant temperature during operation, allowing precision measurement with an improved S/N ratio.

Features

- Wide spectral response range
- Allows same optical path design
- One-stage thermoelectrically cooled type

Applications

- Spectrophotometers
- Laser monitors
- Flame monitors
- Radiation thermometers

■ General ratings / Absolute maximum ratings

Type No.	Package	Cooling	Detector element	Active area (mm)	Absolute maximum ratings: Thermistor allowable dissipation (mW)	TE-cooler allowable current (A)	Reverse voltage V_R (V)	Operating temperature Topr (°C)	Storage temperature Tstg (°C)
K3413-05	TO-8	One-stage TE-cooled	Si	2.4 × 2.4	0.2	1.5	5	-40 to +70	-55 to +85
			InGaAs	φ0.5			20		
K3413-08			Si	2.4 × 2.4			5		
			InGaAs	φ1			2		
K3413-09			Si	2.4 × 2.4			5		
			InGaAs	φ1			10		

■ Electrical and optical characteristics (Typ. Ta=25 °C, unless otherwise noted)


Type No.	Detector element	Measurement condition: Element temperature T (°C)	Spectral response range (µm)	Peak sensitivity wavelength λp (µm)	Photo sensitivity S λ=λp (A/W)	Dark current I_D V_R=10 mV: Typ. (nA)	Dark current I_D V_R=10 mV: Max. (nA)	Shunt Resistance Rsh (MΩ)	D* λ=λp (cm · $Hz^{1/2}$/W)	Rise time tr V_R=0 V R_L=1 kΩ 10 to 90 % (ns)	Terminal capacitance Ct V_R=5 V f=1 MHz (pF)
K3413-05	Si	25	0.32 to 1.67	0.94	0.45	50 (pA)	100 (pA)	200	1.4×10^{13}	200 *3	60 *5
	InGaAs	-10		1.55	0.55	0.05 *1	0.25 *1	3000	1.2×10^{13}	1.5 *4	12
K3413-08	Si	25	0.32 to 2.57	0.94	0.45	50 (pA)	100 (pA)	200	1.4×10^{13}	200 *3	60 *5
	InGaAs	-10		2.30	0.60	1.5 (µA) *2	7.5 (µA) *2	0.03	7.4×10^{10}	23 *4	200 *2
K3413-09	Si	25	0.32 to 1.67	0.94	0.45	50 (pA)	100 (pA)	200	1.4×10^{13}	200 *3	60 *5
	InGaAs	-10		1.55	0.55	0.07 *2	0.35 *2	1500	1.2×10^{13}	7 *4	90

*1: V_R=5 V
*2: V_R=1 V
*3: λ=655 nm
*4: V_R=5 V, R_L=50 Ω
*5: V_R=0 V, f=10 kHz

SOLID STATE DIVISION


■ Spectral response

Si photodiode

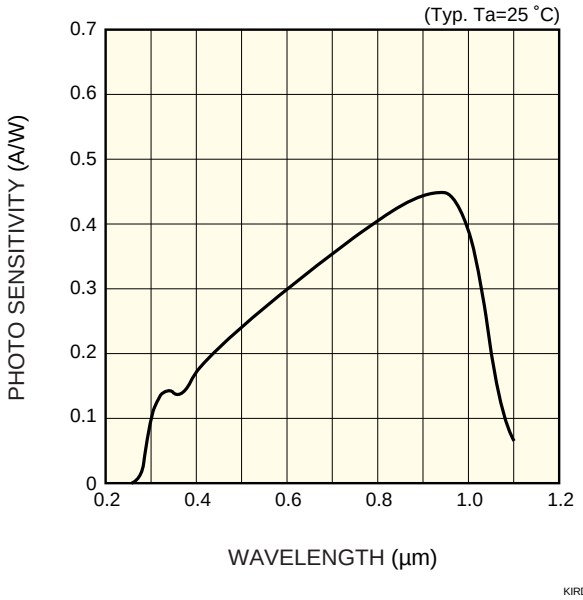

KIRDB0199EA


InGaAs PIN photodiode

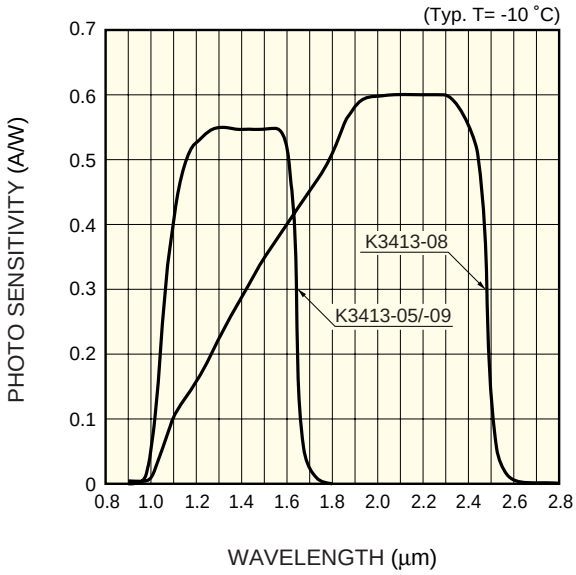

KIRDB0212EA


■ Dark current vs. reverse voltage

Si photodiode

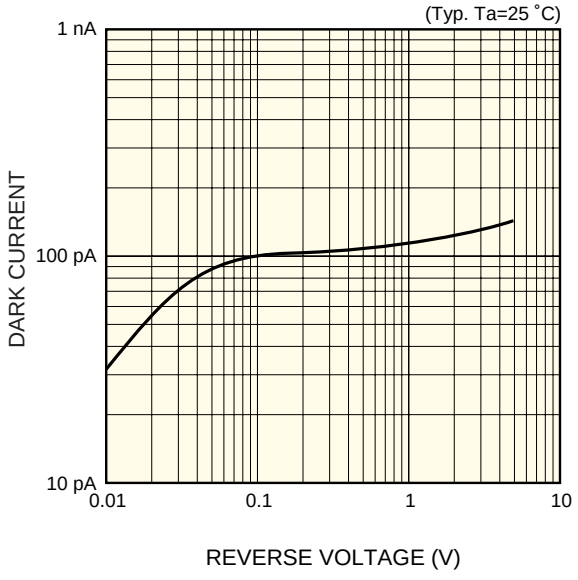

KIRDB0200EA


InGaAs PIN photodiode

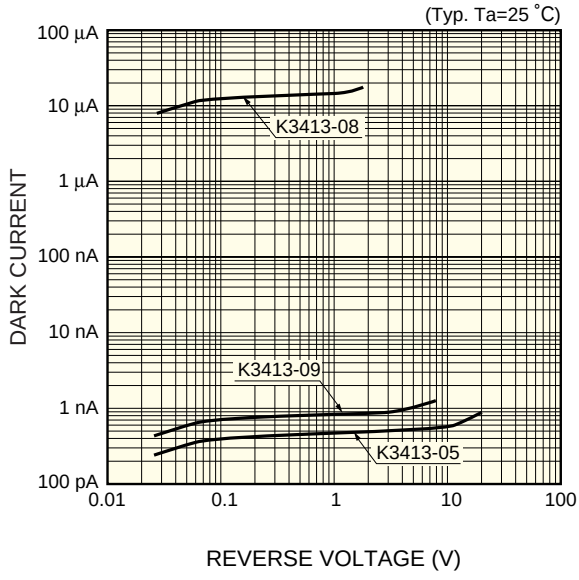

KIRDB0213EA


■ Terminal capacitance vs. reverse voltage

Si photodiode

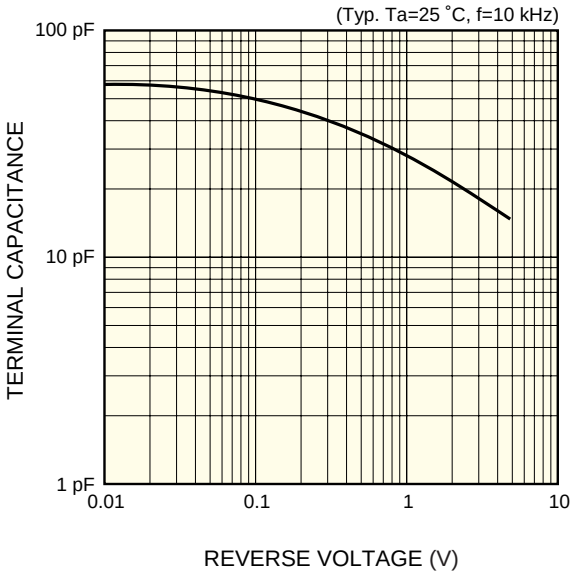

KIRDB0202EA


InGaAs PIN photodiode

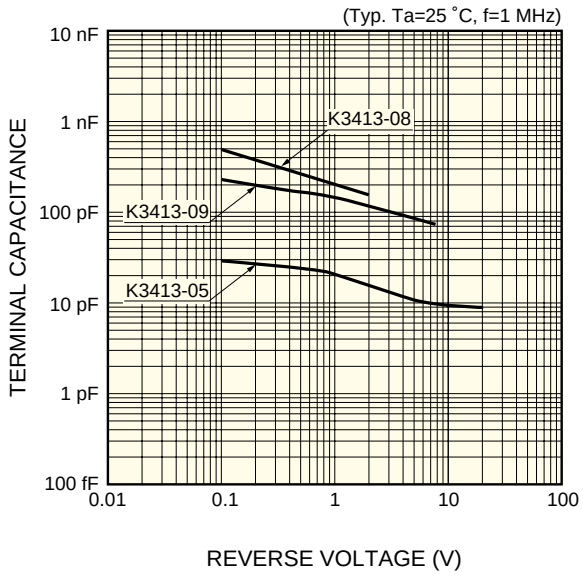

KIRDB0214EA


■ Shunt resistance vs. element temperature

Si photodiode

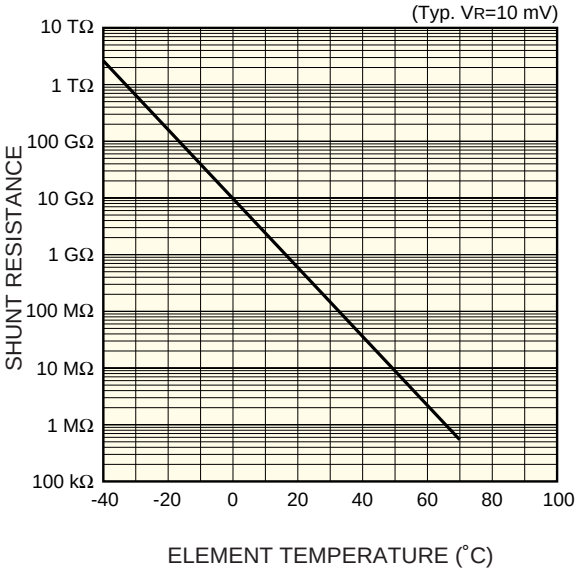


KIRDB0204EA


InGaAs PIN photodiode

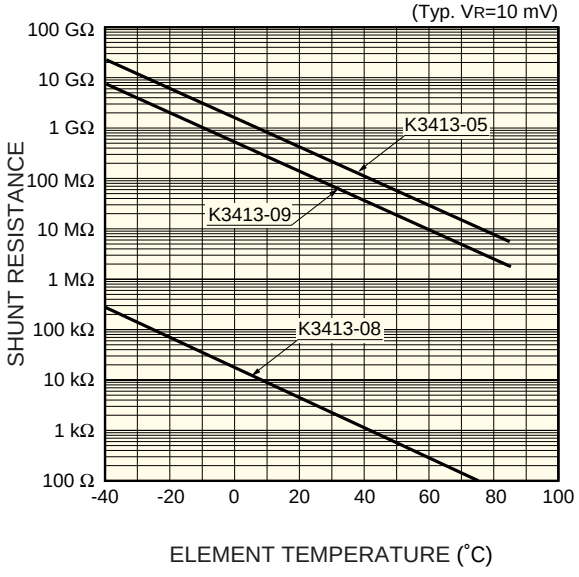

KIRDB0215EA

■ Dimensional outline (unit: mm)

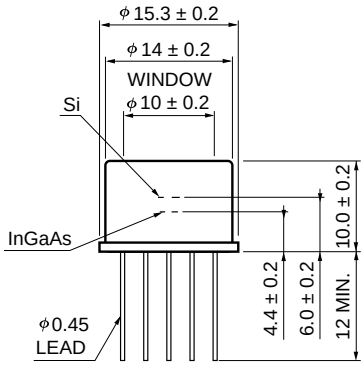



① InGaAs (ANODE)
③ InGaAs (CATHODE)
④ TE-COOLER (-)
⑥ TE-COOLER (+)
⑦⑨ THERMISTOR
⑩ Si (CATHODE)
⑫ Si (ANODE)

KIRDA0156ED

HAMAMATSU Information furnished by HAMAMATSU is believed to be reliable. However, no responsibility is assumed for possible inaccuracies or omissions.
Specifications are subject to change without notice. No patent rights are granted to any of the circuits described herein. ©2006 Hamamatsu Photonics K.K.

HAMAMATSU PHOTONICS K.K., Solid State Division
1126-1 Ichino-cho, Higashi-ku, Hamamatsu City, 435-8558 Japan, Telephone: (81) 53-434-3311, Fax: (81) 53-434-5184, www.hamamatsu.com
U.S.A.: Hamamatsu Corporation: 360 Foothill Road, P.O.Box 6910, Bridgewater, N.J. 08807-0910, U.S.A., Telephone: (1) 908-231-0960, Fax: (1) 908-231-1218
Germany: Hamamatsu Photonics Deutschland GmbH: Arzbergerstr. 10, D-82211 Herrsching am Ammersee, Germany, Telephone: (49) 08152-3750, Fax: (49) 08152-2658
France: Hamamatsu Photonics France S.A.R.L.: 19, Rue du Saule Trapu, Parc du Moulin de Massy, 91882 Massy Cedex, France, Telephone: 33-(1) 69 53 71 00, Fax: 33-(1) 69 53 71 10
United Kingdom: Hamamatsu Photonics UK Limited: 2 Howard Court, 10 Tewin Road, Welwyn Garden City, Hertfordshire AL7 1BW, United Kingdom, Telephone: (44) 1707-294888, Fax: (44) 1707-325777
North Europe: Hamamatsu Photonics Norden AB: Smidesvägen 12, SE-171 41 Solna, Sweden, Telephone: (46) 8-509-031-00, Fax: (46) 8-509-031-01
Italy: Hamamatsu Photonics Italia S.R.L.: Strada della Moia, 1/E, 20020 Arese, (Milano), Italy, Telephone: (39) 02-935-81-733, Fax: (39) 02-935-81-741

Cat. No. KIRD1041E03
May 2006 DN