
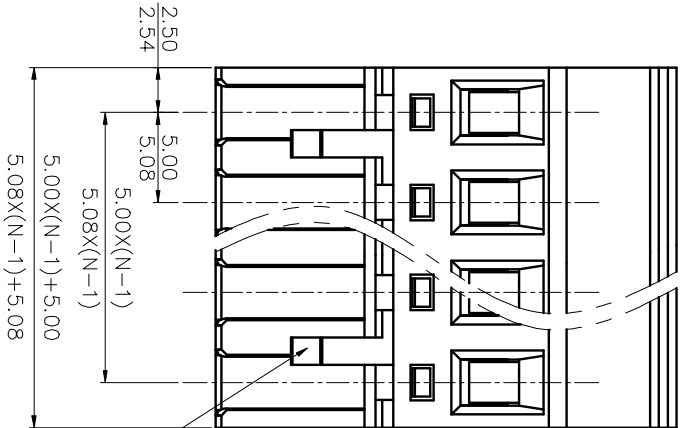
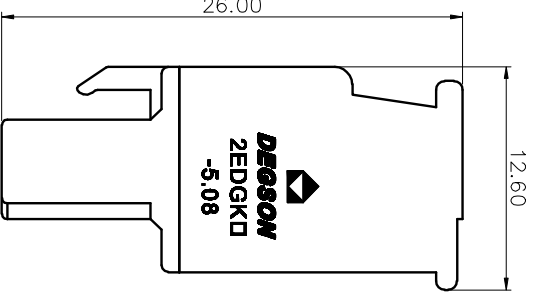
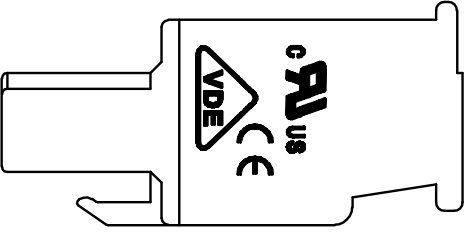


REVISION RECORD			
REV	ECN	DESCRIPTION	DATE

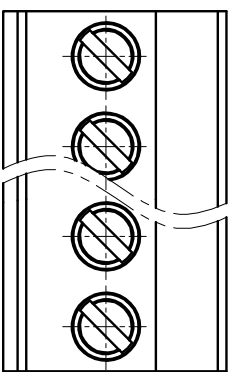

02P-Clasp on the right from this view

NOTES1:

- UL Standard
- 1. Rated voltage/current : 300V / 15A
- 2. Withstanding voltage : AC1600V/1Min.
- 3. Torque value : M2.5 , 3.54Lb.in
- 4. Wire range : 28~12AWG

IEC Standard

1. Pollution Degree	2
Overvoltage Category	III
Rate Impulse Voltage(kV)	4.0kV
Rate Voltage(V)	320V
Rate Current(A)	18A

- 2. Torque value : M2.5 , 0.4N·m
- 3. Wire range : 2.5mm<sup>2</sup>

NOTES2:

- 1. Dimension shall be interpreted per ASME Y14.5-2009
- 2. Pitch : 5.0/5.08mm, Poles : N=02~24P
- 3. Stripping length : 7~8mm
- 4. Operating temperature: -40C~+105C
- 5. Undimensioned tolerances:

Pitch range in mm	Nominal dimension		range		mm
	Over	Over	Over	Over	
6	10	10	30	60	0.1/10
10	10	10	60	100	150
6	10	24	30	60	150
F0.15		H0.20		F0.30	
H0.30		H0.50		H0.70	
F1.00		F1.00		F1.30	
±2.		±2.		±2.	

6. RoHS Compliance

2EDGKA - 5.0/5.08 - XXP - 1Y - 00A (H)  
 (Series No.) (Pitch) (Poles) (Single Pitch) (RoHS)  
 00A-(Standard)

(Color) : 1.(Grey) 2.(Blue) 3.(Black) 4.(Green) 5.(Orange)  
 6.(Red) 7.(Transparent) 8.(Yellow) 9.(White)

DETACHED LISTS			
PART NO.:	/	NINGBO DEGSON ELECTRICAL CO., LTD	宁波德森电子有限公司
APPD:	/	NAME:	2EDGKA-5.0/5.08-XXP-1Y-00A(H)
CHKD:	/	TITLE:	CUSTOMER DRAWING
DRFT:	/	DRAWING NO.:	/
THIRD ANGLE PROJECTION		DO NOT SCALE DRAWING	SCALE
2		1	