
2021-04-14
Product version 00
Document revision 00

# Data sheet

**Order No.: 1190296**

**Type: LPT 2,5/ 1-5,0**

**PCB terminal block, Lever Push-in connection**



## 1 Main features




- No. of pos. 1
- Conductor cross section 2.5 mm²
- Color green (6021)
- Pitch 5 mm
- Connection method Lever Push-in connection
- Nominal current 24 A
- Nominal voltage 400 V
- Connection direction 0 °
- Type of packaging packed in cardboard

## 2 Your advantages

- Tool-free lever principle enables time-saving connection and release of conductors with/without ferrules
- Clear lever positions provide reliable feedback on opened or closed clamping spaces
- Defined contact force ensures that contact remains stable over the long term
- Time-saving push-in connection when lever is closed
- Intuitive operation, thanks to a color-coded actuation lever

Make sure you always use the latest documentation.
It can be downloaded at: phoenixcontact.net/product/1190296


© PHOENIX CONTACT 2021

# 3 Table of contents

1 Main features ... 1
2 Your advantages ... 1
3 Table of contents ... 2
4 3D model in PDF can be activated (Acrobat Reader only) ... 3
5 General Technical Data ... 4
6 Conductor connection ... 5
7 Material properties ... 5
8 Dimensions ... 6
9 Series drawing ... 7
10 Application ... 8
11 Packaging information ... 8
12 Mechanical tests ... 9
13 Electrical tests ... 10
14 Current carrying capacity/derating curves ... 12
15 Environmental and durability tests ... 13
16 Commercial Data ... 14

© PHOENIX CONTACT 2021

## 4 3D model in PDF can be activated (Acrobat Reader only)

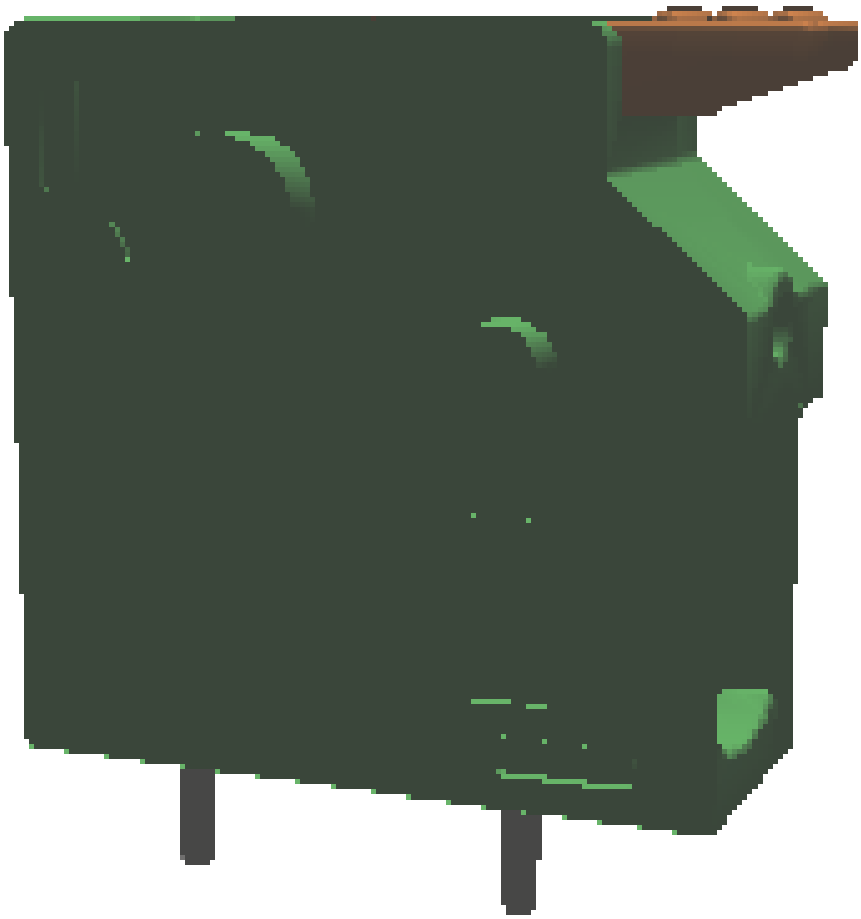

© PHOENIX CONTACT 2021

# 5 General Technical Data

## 5.1 item properties

| | |
|---|---|
| Order No. | 1190296 |
| Type | LPT 2,5/ 1-5,0 |
| Product type | PCB terminal block |
| Range of articles | LPT 2,5/ |
| Pitch | 5 mm |
| Number of positions | 1 |
| Number of levels | 1 |
| Number of connections | 1 |
| Number of potentials | 1 |
| Connection method | Lever Push-in connection |
| Mounting type | Wave soldering |
| Connection direction of the conductor to the PCB | 0 ° |
| Pin layout | Linear double pinning |

© PHOENIX CONTACT 2021

# 6 Conductor connection

## 6.1 Connection capacity

| | |
|---|---|
| Conductor cross section, rigid | 0.2 mm² ... 4 mm² (Conductor connection with open terminal point) |
| Conductor cross section, rigid | 0.5 mm² ... 4 mm² (Push-in connection) |
| Conductor cross section, flexible | 0.2 mm² ... 4 mm² |
| Conductor cross section flexible, with ferrule without plastic sleeve | 0.2 mm² ... 2.5 mm² (Conductor connection with open terminal point) |
| Conductor cross section flexible, with ferrule with plastic sleeve | 0.2 mm² ... 2.5 mm² (Conductor connection with open terminal point) |
| 2 conductors with the same cross section flexible with TWIN ferrule and plastic sleeve | 0.5 mm² ... 1.5 mm² |
| Stripping length | 10 mm ... 12 mm |

## 6.2 Connection capacity AWG

| | |
|---|---|
| Conductor cross section AWG | 24 ... 12 |

# 7 Material properties

## 7.1 Material of metal parts

| | |
|---|---|
| Note | WEEE/RoHS-compliant, whisker-free acc. to IEC 60068-2-82/JEDEC JESD 201 |
| Contact material | Cu alloy |
| Terminal point surface | Tin (10 - 16 µm Sn) |
| Soldering area surface | Tin (10 - 16 µm Sn) |
| Surface characteristics | Tin-plated |

## 7.2 Material of plastic parts

| | Housing | Actuation element |
|---|---|---|
| Color | green (6021) | orange (2003) |
| Insulating material | PA | PA GF |
| Insulating material group | I | I |
| CTI according to IEC 60112 | 600 | 600 |
| Flammability rating according to UL 94 | V0 | V0 |
| Glow wire flammability index GWFI according to EN 60695-2-12 | 850 | |
| Glow wire ignition temperature GWIT according to EN 60695-2-13 | 775 | |
| Temperature for the ball pressure test according to EN 60695-10-2 | 125 °C | |

© PHOENIX CONTACT 2021


# 8 Dimensions

## 8.1 Dimensions for the product

| | |
|---|---|
| Length | 17.8 mm |
| Width | 6.5 mm |
| Height (without solder pin) | 16.64 mm |
| Total height | 20.24 mm |
| Solder pin [P] | 3.5 mm |

© PHOENIX CONTACT 2021

# 9 Series drawing

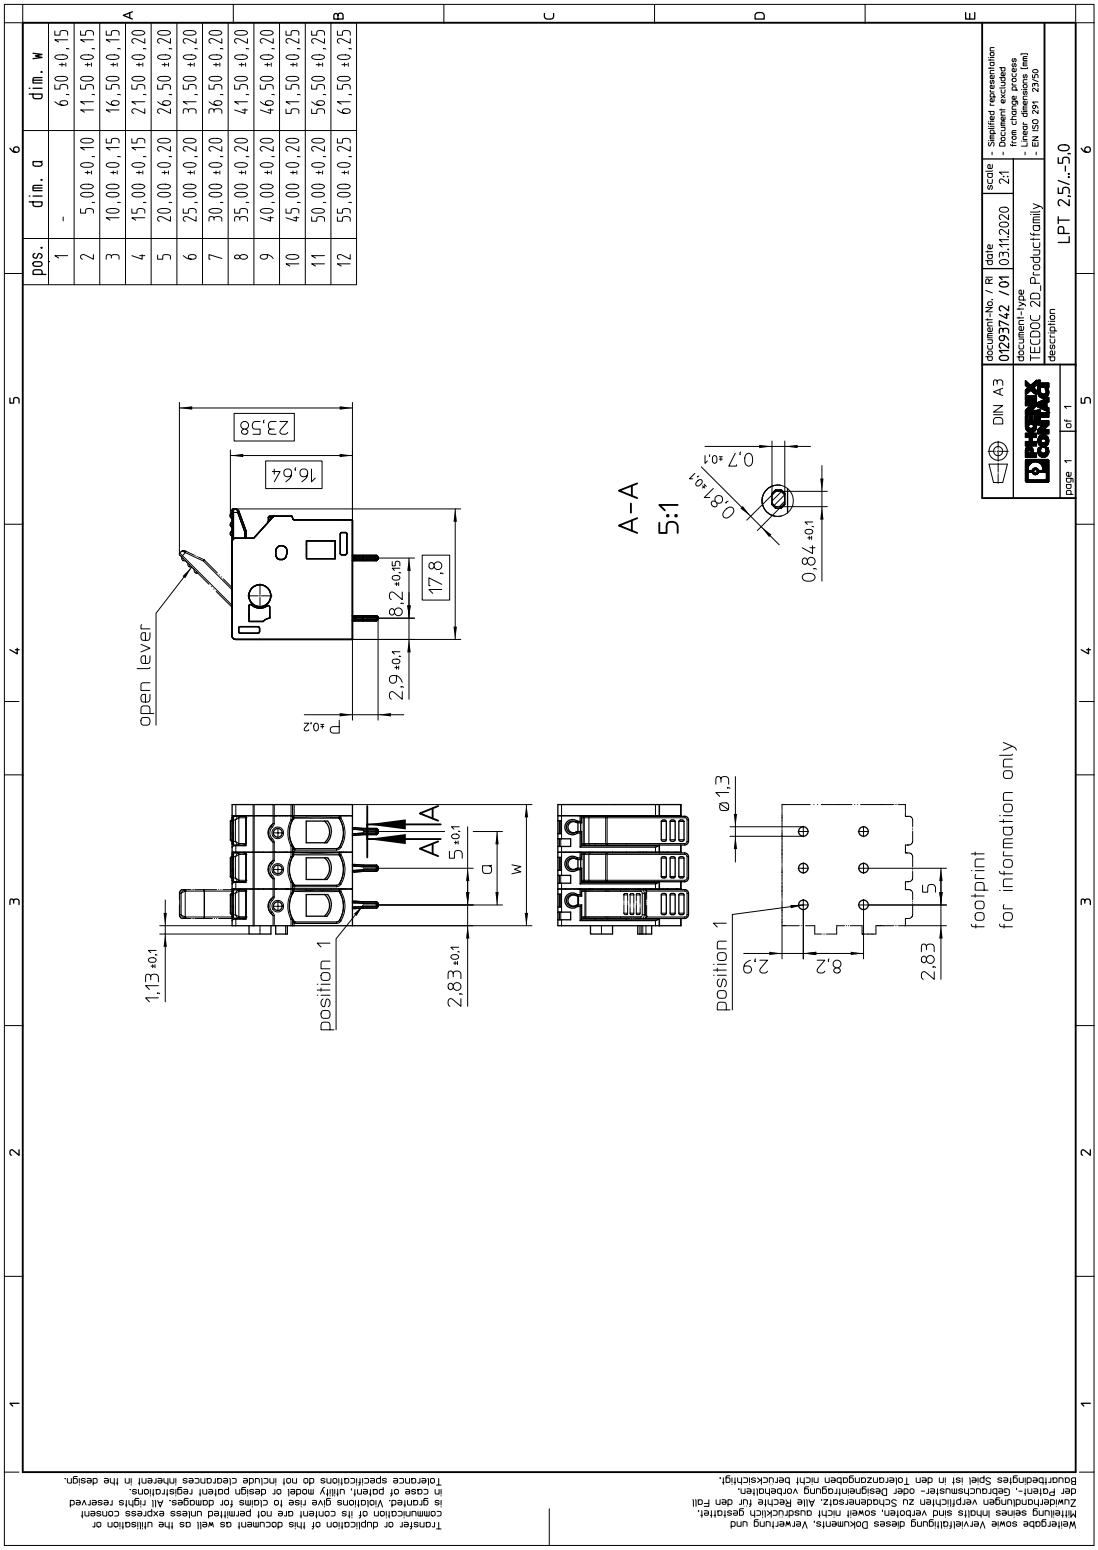


Weitergabe sowie Vervielfältigung dieses Dokuments, Verwertung und Mitteilung seines Inhalts sind verboten, soweit nicht ausdrücklich gestattet. Zuwiderhandlungen verpflichten zu Schadenersatz. Alle Rechte für den Fall der Patent-, Gebrauchsmuster- oder Designeintragung vorbehalten.

Transfer or duplication of this document as well as the utilisation or communication of its content are not permitted unless express consent is granted. Violations give rise to claims for dammages. All rights reserved in case of patent, utility model or design patent registrations.



© PHOENIX CONTACT 2021

# 10 Application

# 11 Packaging information

| | |
|---|---|
| Type of packaging | packed in cardboard |
| Pieces per package | 100 |

## 11.1 Temperature limit values

| | |
|---|---|
| Ambient temperature (storage/transport) | -40 °C ... 70 °C |
| Ambient temperature (assembly) | -5 °C ... 100 °C |
| Ambient temperature (operation) | -40 °C ... 105 °C (Depending on the current carrying capacity/derating curve) |

© PHOENIX CONTACT 2021

# 12 Mechanical tests

## 12.1 Pull-out test

| | |
|---|---|
| Specification | IEC 60999-1:1999-11 |
| Result | Test passed |
| Conductor cross section/conductor type/tractive force actual value | 0.2 $mm^2$ / solid / > 10 N |
| Conductor cross section/conductor type/tractive force actual value | 0.2 $mm^2$ / flexible / > 10 N |
| Conductor cross section/conductor type/tractive force actual value | 4 $mm^2$ / solid / > 60 N |
| Conductor cross section/conductor type/tractive force actual value | 4 $mm^2$ / flexible / > 60 N |
| Conductor cross section/conductor type/tractive force actual value | 0.5 $mm^2$ / solid / > 20 N |

## 12.2 Check for damage to conductor or loosening

| | |
|---|---|
| Specification | IEC 60999-1:1999-11 |
| Result | Test passed |

© PHOENIX CONTACT 2021

# 13 Electrical tests

| | |
|---|---|
| Rated current / conductor cross section | 24 A / 2.5 mm² |
| Rated insulation voltage (III/2) | 400 V |
| Rated surge voltage (III/2) | 4 kV |
| Contact resistance | 0.34 mΩ |
| Degree of pollution | 2 |

## 13.1 Air and creepage distances

| | | | |
|---|---|---|---|
| Component | PCB terminal block | | |
| Specification | IEC 60947-7-4:2019-01 | | |
| Mains type | unearthed mains | | |
| Insulating material group | | | |
| Comparative tracking index (IEC 60112:2003-01) | | | |
| Rated insulation voltage | 320 V | 400 V | 630 V |
| Rated surge voltage | 4 kV | 4 kV | 4 kV |
| Degree of pollution | 3 | 2 | 2 |
| Overvoltage category | III | III | II |
| Minimum clearance case A (inhomogeneous field) | 3 mm | 3 mm | 3 mm |
| Minimum value of the creepage path requirement in acc. with table | 4 mm | 3 mm | 3.2 mm |

## 13.2 Short-time withstand current test

| | |
|---|---|
| Specification | IEC 60947-7-4:2019-01 |
| Result | Test passed |
| Conductor cross section/short-time current | 4 mm² / 168 A |

## 13.3 Aging test (climatic impact and corrosion testing)

| | |
|---|---|
| Specification | IEC 60947-7-4:2019-01 |
| Result | Test passed |
| Contact resistance $R_1$ | 0.34 mΩ / 4 mm² |
| Test sequence 1: low temperature storage | -40 °C / 2 h |
| Test sequence 2: heat storage | 168 h/105 °C |
| Test sequence 3: noxious gas storage (ISO 6988) | KFW 0.2 S/1 cycle |
| Contact resistance $R_2$ | 0.36 mΩ / 4 mm² |
| Rated impulse voltage at sea level Voltage waveform ≥ (1.2/50 µs) | 4.8 kV |
| Power-frequency withstand voltage Voltage waveform ≥ (50/60 Hz) | 3.1 kV |

## 13.4 Insulation resistance

| | |
|---|---|
| Specification | IEC 60512-3-1:2002-02 |
| Result | Test passed |
| Insulation resistance, neighboring positions | > 5 MΩ |

© PHOENIX CONTACT 2021

### 13.5 Mechanical connection test for the PCB terminal block

| | |
|---|---|
| Specification | IEC 60947-7-4:2019-01 |
| Result | Test passed |

### 13.6 Temperature rise test


| | |
|---|---|
| Specification | IEC 60947-7-4:2019-01 |
| Result | Test passed |
| Requirement temperature-rise test | The sum of ambient temperature and temperature rise of the PCB terminal block shall not exceed the upper limiting temperature. |
| Conductor cross section/test current/temperature rise | 2.5 $mm^2$ / 24 A / 40.2 K |
| Conductor cross section/test current/temperature rise | 4 $mm^2$ / 32 A / 53.6 K |

© PHOENIX CONTACT 2021

# 14 Current carrying capacity/derating curves

| | |
|---|---|
| Specification | IEC 60947-7-4:2019-01 |
| Note | Representation based on IEC 60512-5-2:2002-02 |
| Reduction factor | 1 |
| Number of positions | 4 |
| Conductor cross section | 2.5 mm² |

**Type: LPT 2,5/...-5,0**

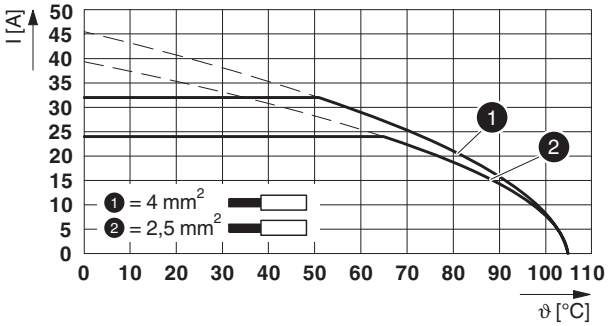


© PHOENIX CONTACT 2021

# 15 Environmental and durability tests

## 15.1 Vibration test

| | |
|---|---|
| Specification | IEC 60068-2-6:2007-12 |
| Result | Test passed |
| Frequency | 10 - 150 - 10 Hz |
| Sweep speed | 1 octave/min |
| Amplitude | 0.35 mm (10 - 60.1 Hz) |
| Acceleration | 50 $m/s^2$ (60.1 - 150 Hz) |
| Test duration per axis | 2.5 h |
| Test directions | X-, Y- and Z-axis |
| Note | |

## 15.2 Assessment of fire risk (glow wire test)

| | | | |
|---|---|---|---|
| Specification | IEC 60695-2-10:2013-04 | | |
| Result | Test passed | | |
| Temperature | 850 °C | | |
| Time of exposure | 5 s | | |

## 15.3 Shock protection

| | |
|---|---|
| Specification | Following IEC 60529:1989-11 + AMD 1:1999-11 + AMD 2:2013-08 |
| Back of the hand protection (Ball ø 50) | |
| Finger protection (movable test finger) | guaranteed |
| Note | unenclosed basic insulation - protected against finger contact with IP20 test finger in acc. with IEC 60529 when connected, above the PCB |

© PHOENIX CONTACT 2021

# 16 Commercial Data

| | |
|---|---|
| Order No. | 1190296 |
| Type | LPT 2,5/ 1-5,0 |
| Pieces per package | 100 |
| Net weight | 2.22 g |
| GTIN | 4063151239343 |
| | Information that applies locally, see link on page 1 |
| | Information that applies locally, see link on page 1 |

© PHOENIX CONTACT 2021