

| DASH NO. | M CODE | MADE FROM |
|---|---|---|

GSD

780273

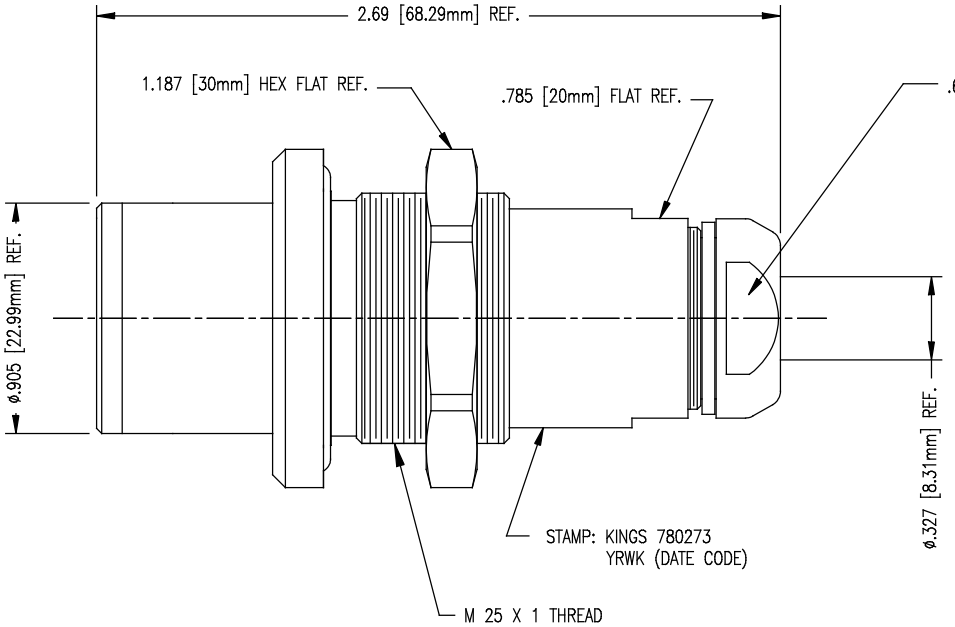


MOUNTING HOLE ø

NOTES:
1. FOR USE WITH 73 CABLE GROUP (BELDEN 9267, 1856A, 1857A).
2. INTERFACE PER KINGS STANDARD ES-52, FIGURE 2, AS APPLICABLE.
3. FOR CABLING INSTRUCTIONS SEE 3-651 (CONVENTIONAL METHOD) OR 3-711 (PRE-PREPPED DIMENSIONS).
4. USE CRIMPING TOOL KTH-8000 AND DIE KTH-8001.
5. MATERIALS:
   INSULATORS: TEFLON, ASTM-D-4894
   GASKETS: SILICONE RUBBER, A-A-59588; O-RINGS: SYNTHETIC RUBBER PER AMS-P-25732
   SPACER: DELRIN 150
   K-GRIP SLEEVES: COM BRONZE, ASTM-B140
   OUTER GROUND CONTACT & ENTRY BODY: BER. COPPER, ASTM-B196
   CENTER CONTACT: BER. COPPER, ASTM-B196
   ALL OTHER METAL PARTS: BRASS, ASTM-B16
6. FINISHES:
   CENTER AND OUTER CONTACT: HARD GOLD PLATE, PER ASTM-B488
   ALL OTHER METAL PARTS: KINGS TARNISH RESISTANT NICKEL FINISH (TR-5)
7. ELECTRICAL CHARACTERISTICS:
   NOMINAL IMPEDANCE: 75 OHMS
   FREQUENCY RANGE: DC-3.0 GHz
   VOLTAGE BREAKDOWN: CENTER CONDUCTOR/INNER GROUND: 1500 VRMS
   INNER GROUND/OUTER GROUND: 500 VRMS

GSD

| REVISIONS | |
|---|---|
| ISSUE | CHANGES |
| 0 | ER 39851<br>HVN 03/20/07 |

780273 SD

| | |
|---|---|
| SCALE | 2 : 1 |
| APPROX SURFACE AREA | |
| | |
| USED ON | |
| REF: | |

ITL, JACK, BKHD

| | | | |
|---|---|---|---|
| DRAWN | HVN | DATE | 03/21/07 |
| DESIGN | HVN | DATE | 03/20/06 |
| APPR. | | DATE | |

KINGS
ELECTRONICS CO., INC.
ROCK HILL, SOUTH CAROLINA 29730

780273