


Schottky PowerMod


CPT40080–CPT400100

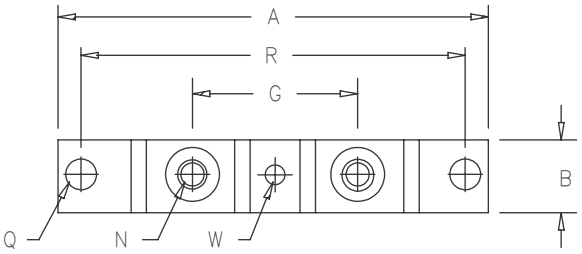

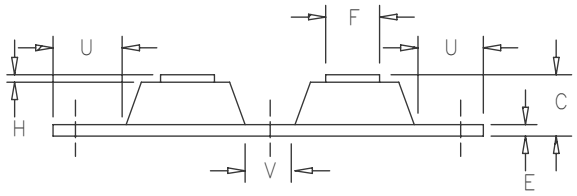




Baseplate
A=Common Anode



Baseplate
Common Cathode



Baseplate
D=Doubler

Notes:
Baseplate: Nickel plated copper

Dim.	Inches		Millimeters		
	Min.	Max.	Min.	Max.	Notes
A	---	3.630	---	92.20	
B	0.700	0.800	17.78	20.32	
C	---	0.630	---	16.00	
E	0.120	0.130	3.05	3.30	
F	0.490	0.510	12.45	12.95	
G	1.375 BSC		34.92 BSC		
H	0.010	---	0.25	---	
N	---	---	---	---	1/4–20
Q	0.275	0.290	6.99	7.37	Dia.
R	3.150 BSC		80.01 BSC		
U	0.600	---	15.24	---	
V	0.312	0.340	7.92	8.64	
W	0.180	0.195	4.57	4.95	Dia.

Microsemi Catalog Number	Industry Part Number	Working Peak Reverse Voltage	Repetitive Peak Reverse Voltage
CPT40080*	403CNQ080 MBR40080CT	80V	80V
CPT40090*		90V	90V
CPT400100*	403CNQ100 MBRP400100CTL MBR400100CT	100V	100V

*Add Suffix A for Common Anode, D for Doubler

- Schottky Barrier Rectifier
- Guard Ring Protection
- 400 Amperes/80–100 Volts
- 175°C Junction Temperature
- Reverse Energy Tested
- ROHS Compliant

Electrical Characteristics

Average forward current per pkg	$I_{F(AV)}$ 400 Amps	T_C = 121°C, Square wave, $R_{\theta JC}$ = 0.16°C/W
Average forward current per leg	$I_{F(AV)}$ 200 Amps	T_C = 121°C, Square wave, $R_{\theta JC}$ = 0.32°C/W
Maximum surge current per leg	I_{FSM} 3000 Amps	8.3ms, half sine, T_J = 175°C
Maximum repetitive reverse current per leg	$I_{R(OV)}$ 2 Amps	f = 1 KHZ, 25°C, 1μsec square wave
Max peak forward voltage per leg	V_{FM} .89 Volts	I_{FM} = 200A; T_J = 25°C*
Max peak forward voltage per leg	V_{FM} .69 Volts	I_{FM} = 200A; T_J = 175°C*
Max peak reverse current per leg	I_{RM} 50 mA	V_{RRM}, T_J = 125°C*
Max peak reverse current per leg	I_{RM} 5.0 mA	V_{RRM}, T_J = 25°C
Typical junction capacitance per leg	C_J 4400 pF	V_R = 5.0V, T_C = 25°C

*Pulse test: Pulse width 300μsec, Duty cycle 2%

Thermal and Mechanical Characteristics

Storage temp range	T_{STG}	−55°C to 175°C
Operating junction temp range	T_J	−55°C to 175°C
Max thermal resistance per leg	$R_{\theta JC}$	0.32°C/W Junction to case
Max thermal resistance per pkg	$R_{\theta JC}$	0.16°C/W Junction to case
Typical thermal resistance (greased)	$R_{\theta CS}$	0.08°C/W Case to sink
Terminal Torque		35–50 inch pounds
Mounting Base Torque (outside holes)		30–40 inch pounds
Mounting Base Torque (center hole)		8–10 inch pounds
center hole must be torqued first		
Weight		2.8 ounces (77 grams) typical

CPT40080–CPT400100

Figure 1
Typical Forward Characteristics – Per Leg

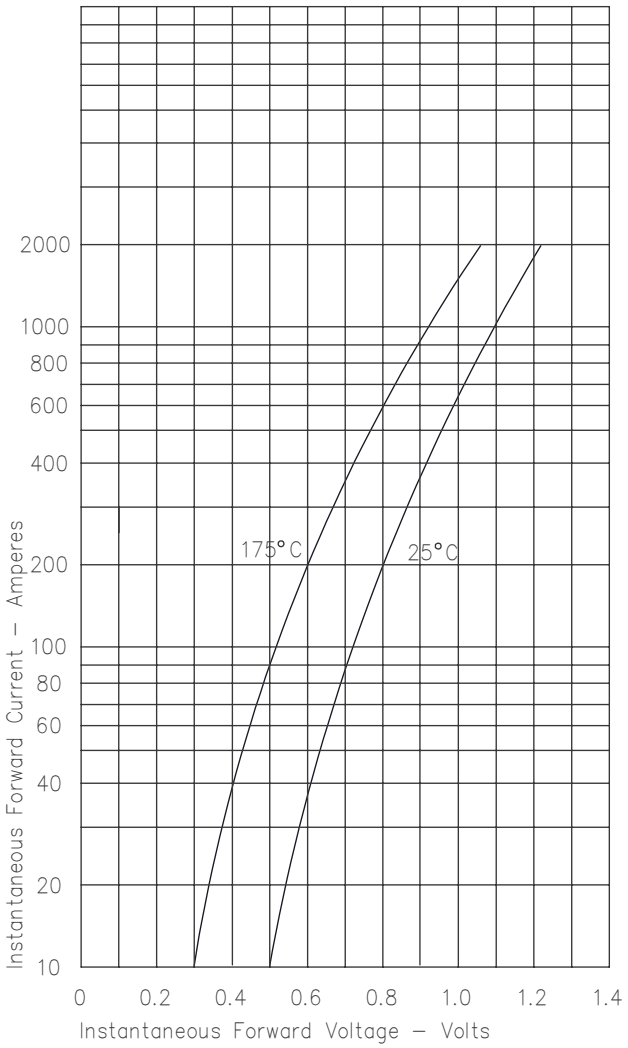


Figure 2
Typical Reverse Characteristics – Per Leg

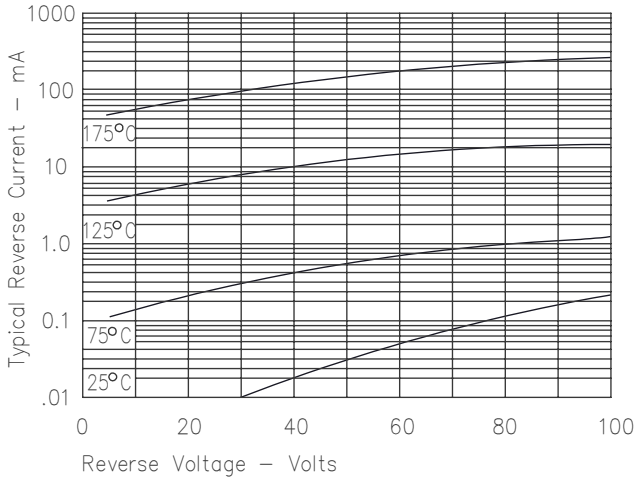


Figure 3
Typical Junction Capacitance – Per Leg

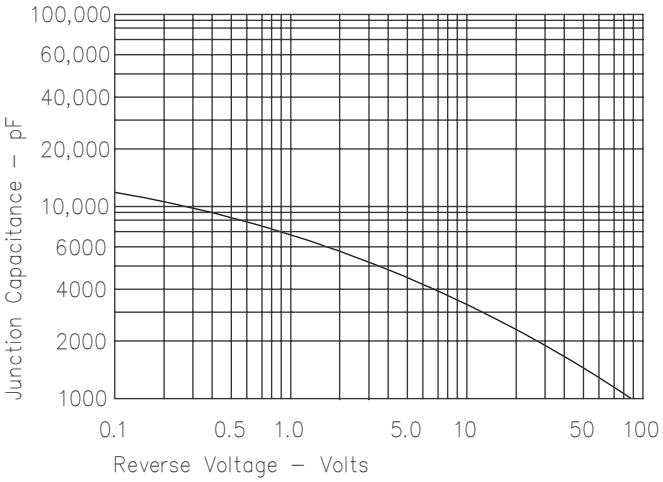


Figure 4
Forward Current Derating – Per Leg

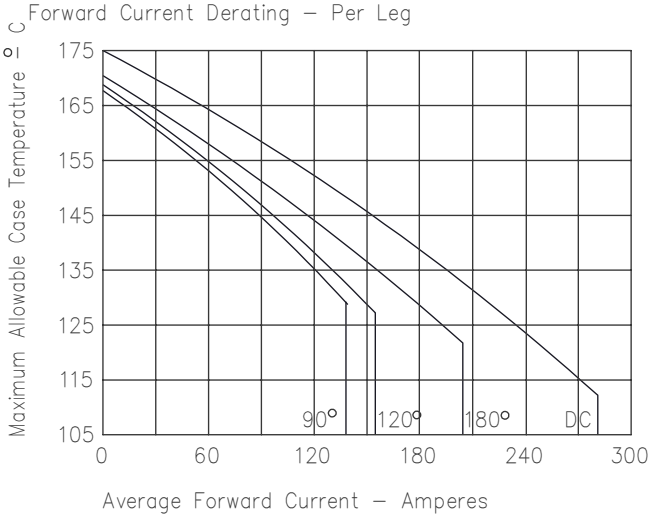


Figure 5
Maximum Forward Power Dissipation – Per Leg

