


B40C1000G THRU B380C1000G

GLASS PASSIVATED SINGLE-PHASE BRIDGE RECTIFIER

Reverse Voltage - 65 to 600 Volts

Forward Current -1.0 Ampere


Case Style WOG

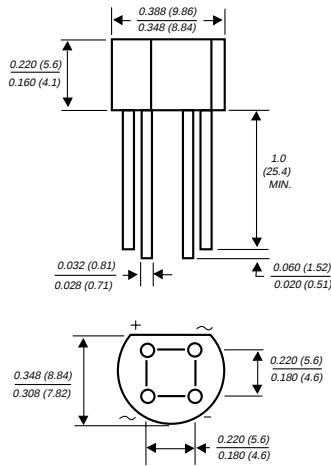

Dimensions in inches and (millimeters)

FEATURES

- ♦ Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- ♦ Glass passivated chip junctions
- ♦ High case dielectric strength
- ♦ Typical I_R less than $0.1 \mu A$
- ♦ High overload surge current
- ♦ Ideal for printed circuit boards
- ♦ High temperature soldering guaranteed:
260°C/10 seconds, 0.375" (9.5mm) lead length,
5 lbs. (2.3kg) tension



MECHANICAL DATA

Case: Molded plastic body over passivated junctions

Terminals: Plated leads solderable per MIL-STD-750, Method 2026

Mounting Position: Any

Weight: 0.04 ounce, 1.1 grams

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.


	SYMBOLS	B40 C1000G	B80 C1000G	B125 C1000G	B250 C1000G	B380 C1000G	UNITS
Maximum repetitive peak reverse voltage	V_{RRM}	65	125	200	400	600	Volts
Maximum RMS input voltage R + C-load	V_{RMS}	40	80	125	250	380	Volts
Maximum DC blocking voltage	V_{DC}	65	125	200	400	600	Volts
Maximum peak working voltage	V_{RWM}	90	180	300	600	900	Volts
Maximum non-repetitive peak voltage	V_{RSM}	100	200	350	600	1000	Volts
Maximum repetitive peak forward surge current	I_{FRM}	10.0					Amps
Maximum average forward output current for free air operation at $T_A=45^\circ C$ R + L-Load C-Load	$I_{(AV)}$	1.2 1.0					Amps
Peak forward surge current single sine wave on rated load (JEDEC Method)	I_{FSM}	45.0					Amps
Rating for fusing at $T_J=125^\circ C$ ($t<8.3ms$)	I^2t	10.0					A ² sec
Minimum series resistor C-load at $V_{RMS} = \pm 10\%$	R_T	1.0	2.0	4.0	8.0	12.0	Ohms
Maximum load capacitance +50% -10%	C_L	5000	2500	1000	500	200	μF
Maximum instantaneous forward voltage drop per leg at 1.0A	V_F	1.0					Volts
Maximum reverse current at rated repetitive peak voltage per leg $T_A=25^\circ C$	I_R	10.0					μA
Typical thermal resistance (NOTE 1)	$R_{\theta JA}$ $R_{\theta JL}$	36.0 11.0					$^\circ C/W$
Operating junction temperature range	T_J	-40 to +125					$^\circ C$
Storage temperature range	T_{STG}	-40 to +150					$^\circ C$

NOTE:


(1) Thermal resistance from junction to ambient and from junction to lead mounted on P.C.B. at 0.375" (9.5mm) lead lengths with 0.2 x 0.2" (5.5 x 5.5mm) copper pads

RATINGS AND CHARACTERISTICS CURVES B40C1000G THRU B380C1000G


**FIG. 1 - DERATING CURVE
OUTPUT RECTIFIED CURRENT
B40C1000G...B125C1000G**

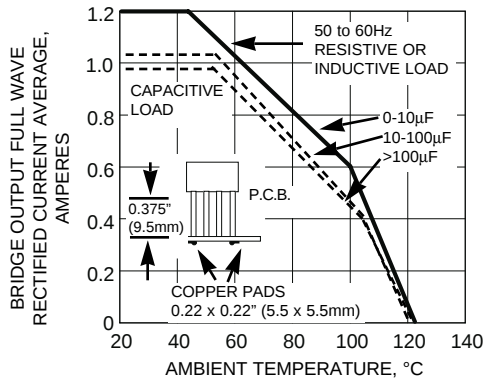


**FIG. 2 - DERATING CURVES FOR
OUTPUT RECTIFIED CURRENT
B250C1000G...B380C1000G**

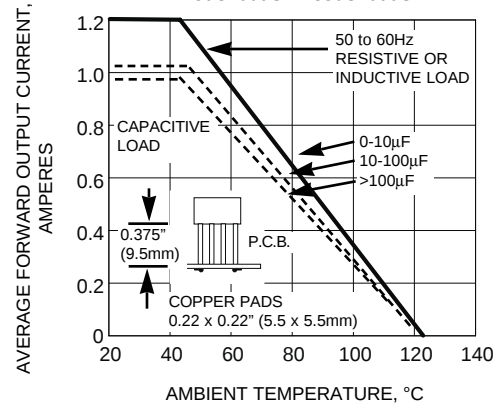


**FIG. 3 - MAXIMUM NON-REPETITIVE PEAK
FORWARD CURRENT PER LEG**

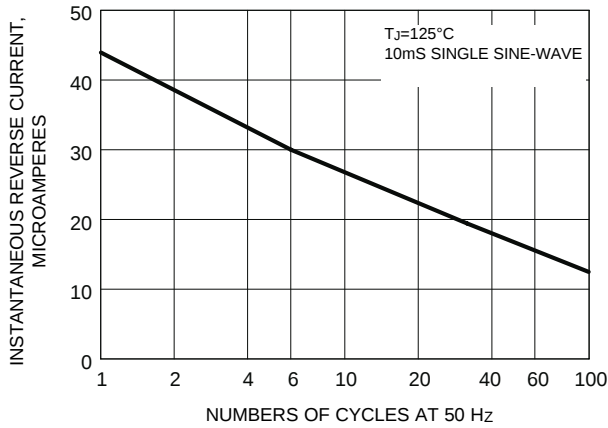

**FIG. 4 - TYPICAL FORWARD CHARACTERISTICS
PER LEG**

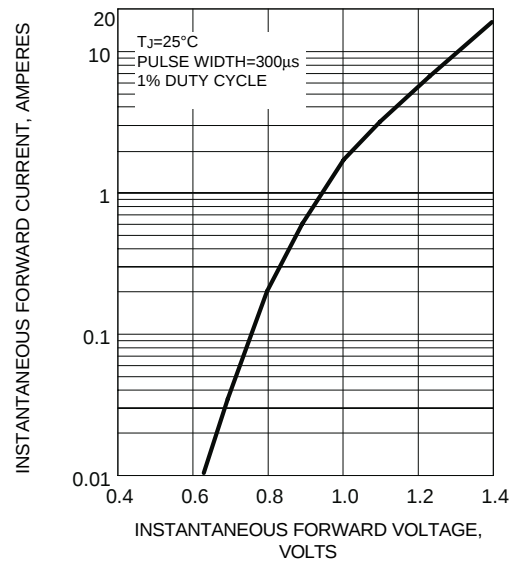

**FIG. 5 - TYPICAL REVERSE
CHARACTERISTICS PER LEG**

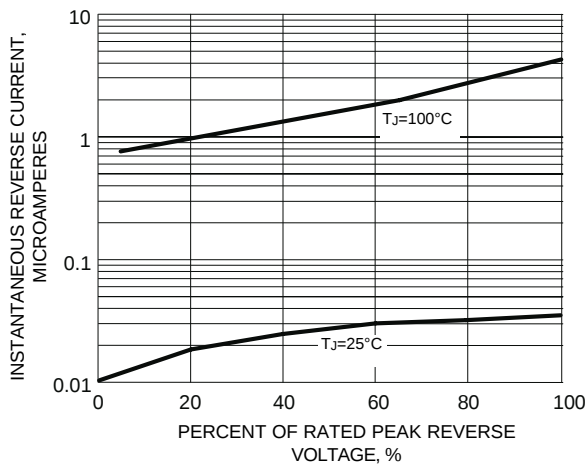

**FIG. 6 - TYPICAL JUNCTION CAPACITANCE
PER LEG**

