

Legacy NMA2414-A2T 100 MHz to 6000 MHz



Specifications

| | |
|----------------------------------|---------------------|
| RF Frequency | 100 MHz to 6000 MHz |
| Noise Output | 74 dB ENR |
| Noise Spectral Density (N_0) | -100 dBm/Hz Min |
| Flatness | 4 dB P-P Max |
| Peak Factor | 5:1 |
| Bias Voltage | 15 V |
| Supply Current | 350 mA Max |
| Impedance | 50 ohms |

Package and Connectivity


| | |
|----------------|-----------|
| Construction | Coaxial |
| Package Type | T Package |
| Connector Type | SMA(f) |

Environmental

| | |
|-----------------------|---------------|
| Operating Temperature | -30 to 85 °C |
| Storage Temperature | -65 to 125 °C |

Notes

Option TTL

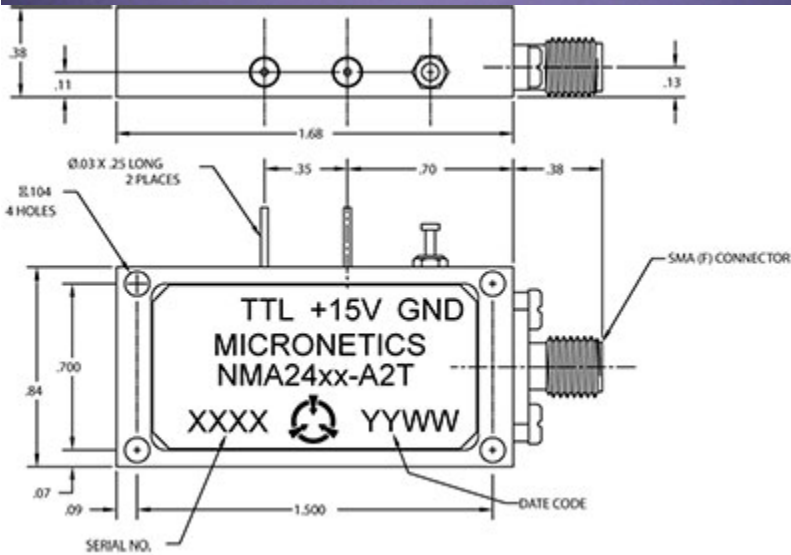

Specifications subject to change without notice

Micronetics, Inc. | Hudson, NH | Tel: 1-603-883-2900 | www.Micronetics.com

MICRONETICS

