

QUADRATURE HYBRID MODEL DQK-302B

WIDE BANDWIDTH


20 - 60 MHz

SPECIFICATIONS

| | | | |
|-----------------------------|-----------------------------|-------------------------------|------------------------|
| Operating Frequency: | 20 - 60 MHz | Phase Unbalance: | 1.0° (Typ)/ 3.0° (Max) |
| Insertion Loss: | 0.3 dB (Typ) / 0.5 dB (Max) | VSWR: | 1.3:1 (Max) |
| Isolation: | 23 dB (Typ)/20 dB (Min) | Power Rating | 1 Watt (Max) |
| Amplitude Unbalance: | 0.8 dB (Typ) / 1.0 dB (Max) | Impedance: | 50 Ohms |
| | | Operating Temp. Range: | -55° to +85°C |



MECHANICAL OUTLINE:113B

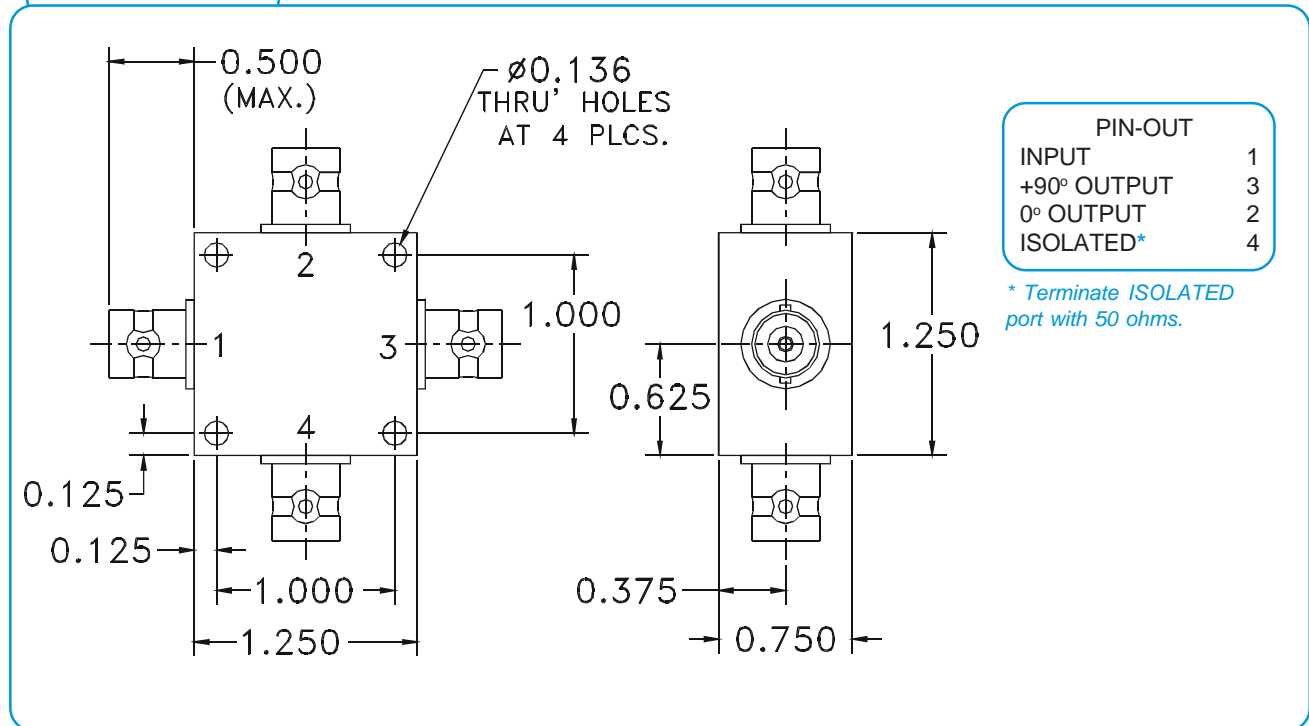

QUADRATURE HYBRID MODEL DQK-302B

WIDE BANDWIDTH

20 - 60 MHz

PERFORMANCE PLOTS

