


SHEET 1 OF 1

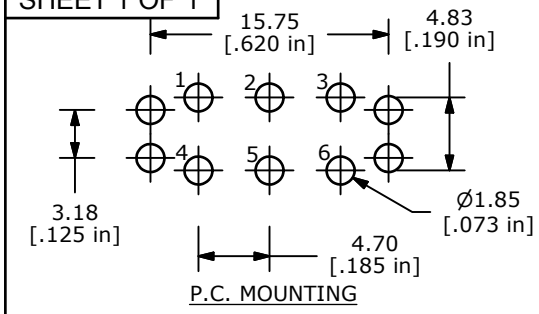

P.C. MOUNTING

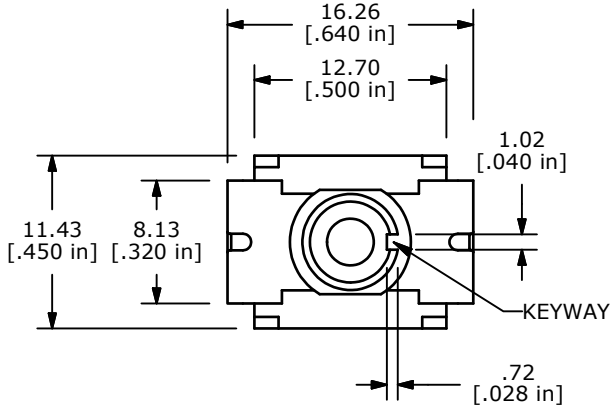


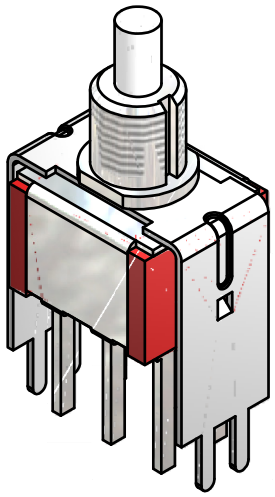


▲


SWITCH FUNCTION	
POS. 1	POS. 2
	
ON	(ON)
1-3, 4-6	1-2, 4-5

() = MOMENTARY



CIRCUIT DIAGRAM

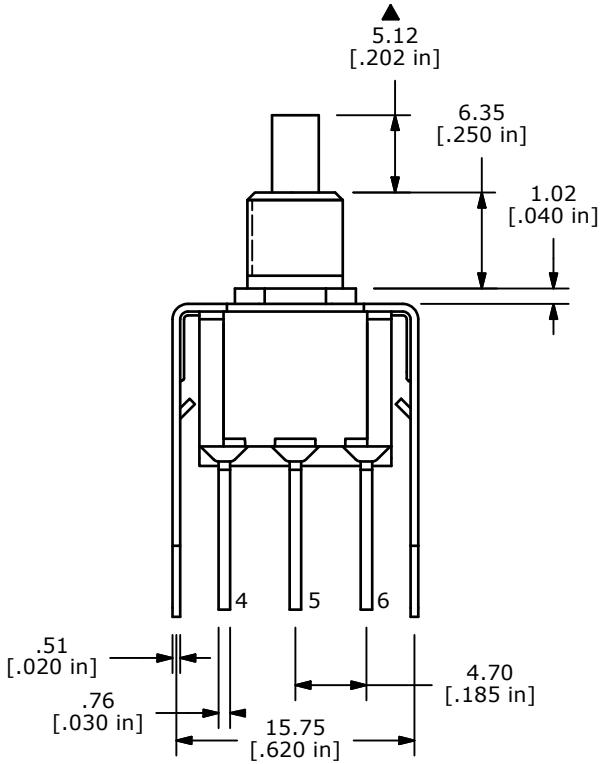

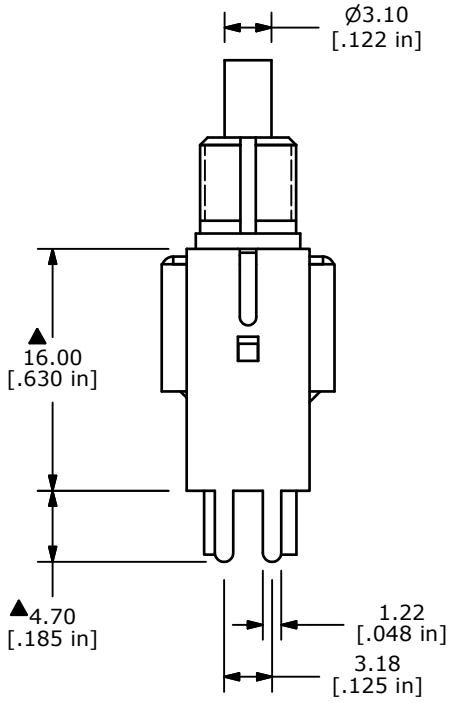

NOTES:
1. ALL DIMENSIONS IN MM [INCH]
2. GENERAL TOLERANCE: X.X=±0.4
   X.XX=±0.25
3. TERMINAL NUMBERS FOR REFERENCE ONLY
▲4. CONTACT MATERIAL: GOLD
5. RATING: 0.4VA MAX. @ 20 VAC OR VDC MAX.
6. ELECTRIC LIFE: 50,000 MAKE-AND-BREAK CYCLES
   AT FULL LOAD
7. INSULATION RESISTANCE: 1,000 MEGA-OHM MIN.
8. ACUATION FORCE: 300 ± 100gf
▲9. TRAVEL: 1.0 ± 0.2mm
10. CONTACT RESISTANCE: 20 mOHM MAX.
    TYPICAL @ 2-4 VDC
11. DIELECTRIC STRENGTH: 1,000 V RMS @ SEA LEVEL.
12. OPERATING TEMP.: -30°C to 85°C
13. ▲DENOTES CRITICAL PARAMETER.
14. 2002/95/EC (ROHS) COMPLIANT.

REV	PCR NO	DESCRIPTION	DATE	BY
C	20052	DRAWING UPDATE / CLEAN-UP	7/7/11	BGL
D	16422	REDRAWN IN INVENTOR FORMAT	9/11/06	BO

THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED

E•SWITCH®

TITLE 700DP7B10VS3RE

SCALE	DATE	DR	DWG	REV
2:1	9/11/2006	BO	T721031	E