International
IOR Rectifier


DIGITAL AUDIO MOSFET

IRLIB9343

Features

- Advanced Process Technology
- Key Parameters Optimized for Class-D Audio Amplifier Applications
- Low R_{DSON} for Improved Efficiency
- Low Q_g and Q_{sw} for Better THD and Improved Efficiency
- Low Q_{rr} for Better THD and Lower EMI
- 175°C Operating Junction Temperature for Ruggedness
- Repetitive Avalanche Capability for Robustness and Reliability

Key Parameters		
V_{DS}	-55	V
$R_{DS(ON)}$ typ. @ V_{GS} = -10V	93	mΩ
$R_{DS(ON)}$ typ. @ V_{GS} = -4.5V	150	mΩ
Q_g typ.	31	nC
T_J max	175	°C





TO-220 Full-Pak

Description

This Digital Audio HEXFET® is specifically designed for Class-D audio amplifier applications. This MosFET utilizes the latest processing techniques to achieve low on-resistance per silicon area. Furthermore, Gate charge, body-diode reverse recovery and internal Gate resistance are optimized to improve key Class-D audio amplifier performance factors such as efficiency, THD and EMI. Additional features of this MosFET are 175°C operating junction temperature and repetitive avalanche capability. These features combine to make this MosFET a highly efficient, robust and reliable device for Class-D audio amplifier applications.

Absolute Maximum Ratings

	Parameter	Max.	Units
V_{DS}	Drain-to-Source Voltage	-55	V
V_{GS}	Gate-to-Source Voltage	±20	
I_D @ T_C = 25°C	Continuous Drain Current, V_{GS} @ -10V	-14	A
I_D @ T_C = 100°C	Continuous Drain Current, V_{GS} @ -10V	-10	
I_{DM}	Pulsed Drain Current ①	-60	
P_D @T_C = 25°C	Power Dissipation	33	W
P_D @T_C = 100°C	Power Dissipation	20	
	Linear Derating Factor	0.26	W/°C
T_J T_{STG}	Operating Junction and Storage Temperature Range	-40 to + 175	°C
	Mounting Torque, 6-32 or M3 screw	10 (1.1)	lbf•in (N•m)

Thermal Resistance

	Parameter	Typ.	Max.	Units
$R_{\theta JC}$	Junction-to-Case ④	—	3.84	°C/W
$R_{\theta JA}$	Junction-to-Ambient ④	—	65	

Notes ① through ⑤ are on page 7

Electrical Characteristics @ T_J = 25°C (unless otherwise specified)


	Parameter	Min.	Typ.	Max.	Units	Conditions
BV_{DSS}	Drain-to-Source Breakdown Voltage	-55	—	—	V	V_{GS} = 0V, I_D = -250µA
$\Delta BV_{DSS}/\Delta T_J$	Breakdown Voltage Temp. Coefficient	—	-52	—	mV/°C	Reference to 25°C, I_D = -1mA
$R_{DS(on)}$	Static Drain-to-Source On-Resistance	—	93	105	mΩ	V_{GS} = -10V, I_D = -3.4A ③
		—	150	170		V_{GS} = -4.5V, I_D = -2.7A ③
$V_{GS(th)}$	Gate Threshold Voltage	-1.0	—	—	V	V_{DS} = V_{GS}, I_D = -250µA
$\Delta V_{GS(th)}/\Delta T_J$	Gate Threshold Voltage Coefficient	—	-3.7	—	mV/°C	
I_{DSS}	Drain-to-Source Leakage Current	—	—	-2.0	µA	V_{DS} = -55V, V_{GS} = 0V
		—	—	-25		V_{DS} = -55V, V_{GS} = 0V, T_J = 125°C
I_{GSS}	Gate-to-Source Forward Leakage	—	—	-100	nA	V_{GS} = -20V
	Gate-to-Source Reverse Leakage	—	—	100		V_{GS} = 20V
g_{fs}	Forward Transconductance	5.3	—	—	S	V_{DS} = -25V, I_D = -14A
Q_g	Total Gate Charge	—	31	47		V_{DS} = -44V
Q_{gs}	Pre-Vth Gate-to-Source Charge	—	7.1	—		V_{GS} = -10V
Q_{gd}	Gate-to-Drain Charge	—	8.5	—		I_D = -14A
Q_{godr}	Gate Charge Overdrive	—	15	—		See Fig. 6 and 19
$t_{d(on)}$	Turn-On Delay Time	—	9.5	—		V_{DD} = -28V, V_{GS} = -10V ③
t_r	Rise Time	—	24	—		I_D = -14A
$t_{d(off)}$	Turn-Off Delay Time	—	21	—	ns	R_G = 2.5Ω
t_f	Fall Time	—	9.5	—		
C_{iss}	Input Capacitance	—	660	—		V_{GS} = 0V
C_{oss}	Output Capacitance	—	160	—	pF	V_{DS} = -50V
C_{rss}	Reverse Transfer Capacitance	—	72	—		f = 1.0MHz, See Fig.5
C_{oss}	Effective Output Capacitance	—	280	—		V_{GS} = 0V, V_{DS} = 0V to -44V
L_D	Internal Drain Inductance	—	4.5	—		Between lead,
					nH	6mm (0.25in.)
L_S	Internal Source Inductance	—	7.5	—		from package
						and center of die contact

Avalanche Characteristics

	Parameter	Typ.	Max.	Units
E_{AS}	Single Pulse Avalanche Energy②	—	190	mJ
I_{AR}	Avalanche Current ⑤	See Fig. 14, 15, 17a, 17b		A
E_{AR}	Repetitive Avalanche Energy ⑤			mJ

Diode Characteristics

	Parameter	Min.	Typ.	Max.	Units	Conditions
I_S @ T_C = 25°C	Continuous Source Current	—	—	-14		MOSFET symbol
	(Body Diode)				A	showing the
I_{SM}	Pulsed Source Current	—	—	-60		integral reverse
	(Body Diode) ①					p-n junction diode.
V_{SD}	Diode Forward Voltage	—	—	-1.2	V	T_J = 25°C, I_S = -14A, V_{GS} = 0V ③
t_{rr}	Reverse Recovery Time	—	57	86	ns	T_J = 25°C, I_F = -14A
Q_{rr}	Reverse Recovery Charge	—	120	180	nC	di/dt = 100A/µs ③



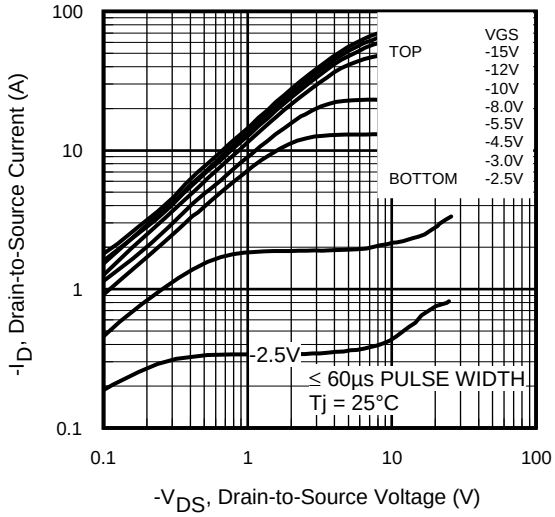


Fig 1. Typical Output Characteristics

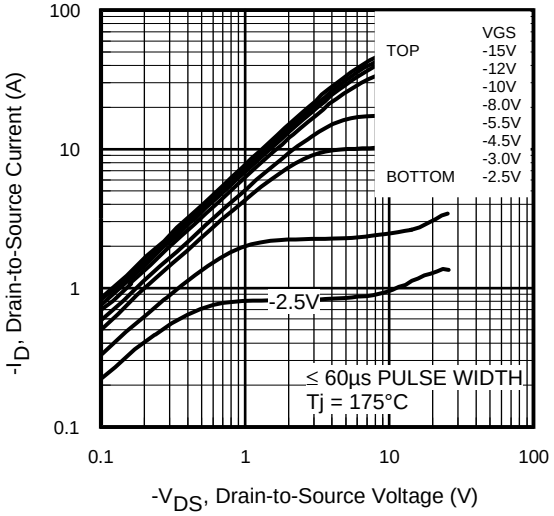


Fig 2. Typical Output Characteristics

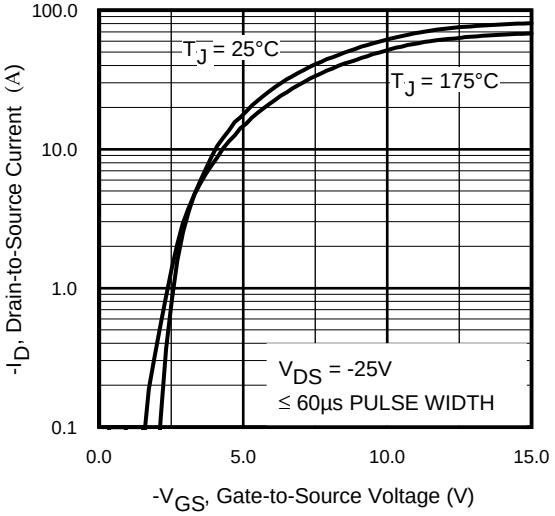


Fig 3. Typical Transfer Characteristics

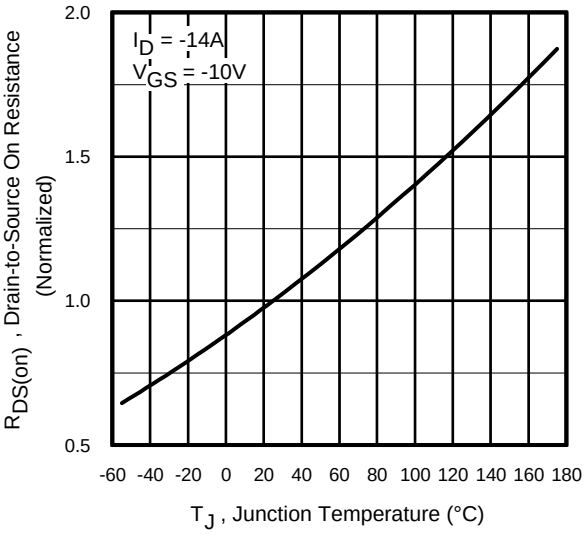


Fig 4. Normalized On-Resistance vs. Temperature

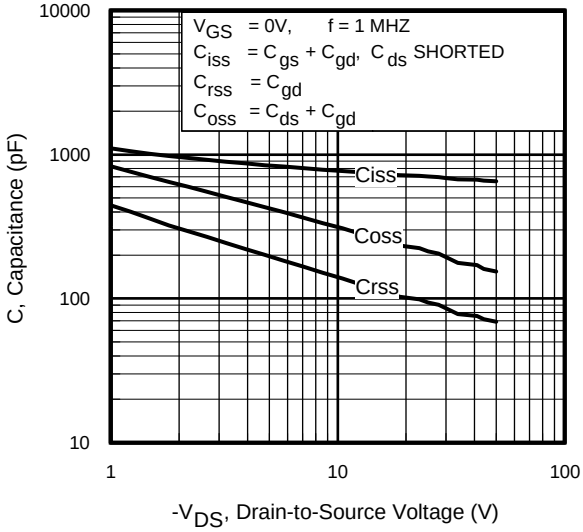


Fig 5. Typical Capacitance vs.Drain-to-Source Voltage

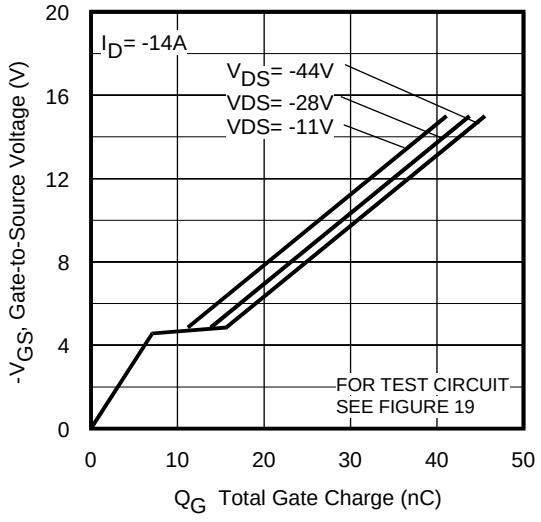


Fig 6. Typical Gate Charge vs.Gate-to-Source Voltage

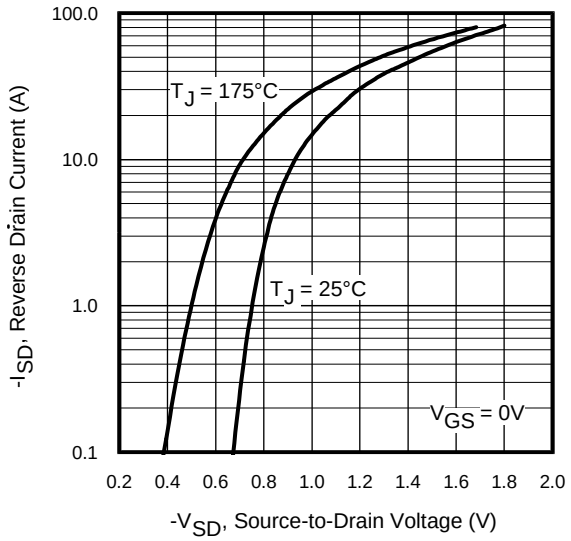


Fig 7. Typical Source-Drain Diode Forward Voltage

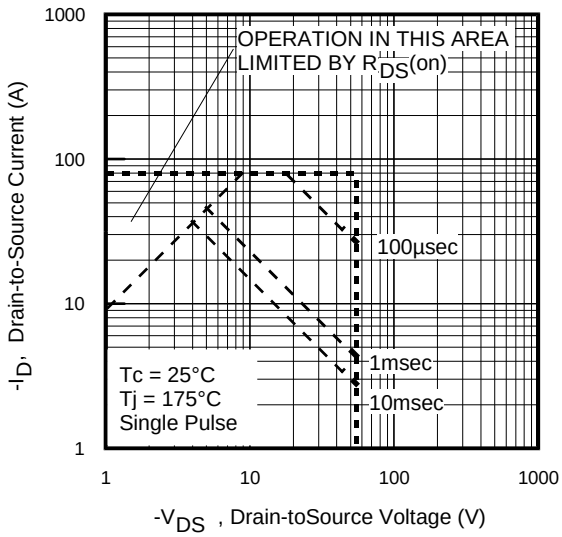


Fig 8. Maximum Safe Operating Area

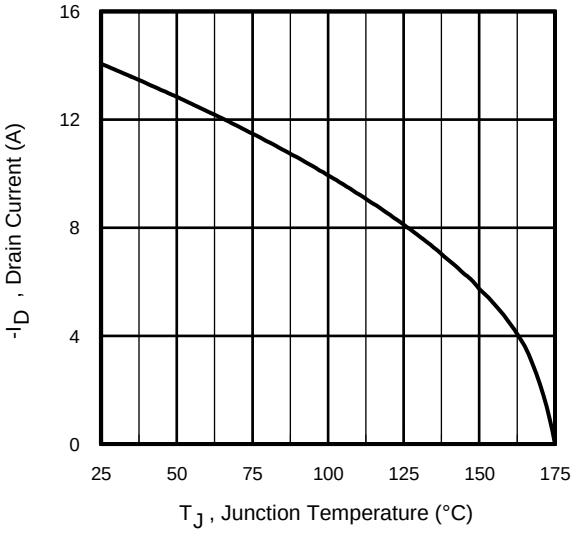


Fig 9. Maximum Drain Current vs. Case Temperature

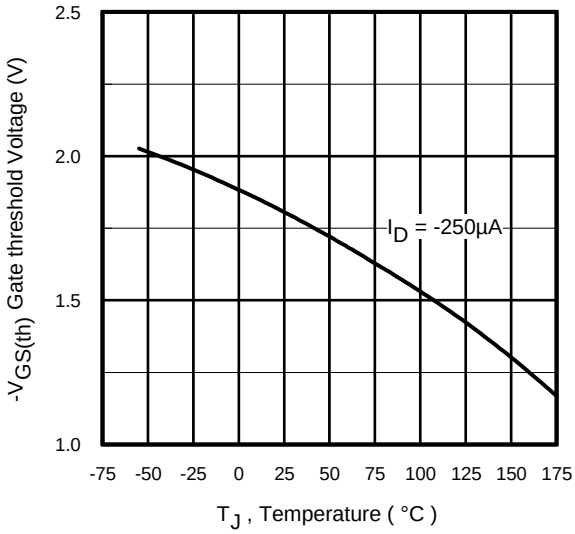


Fig 10. Threshold Voltage vs. Temperature

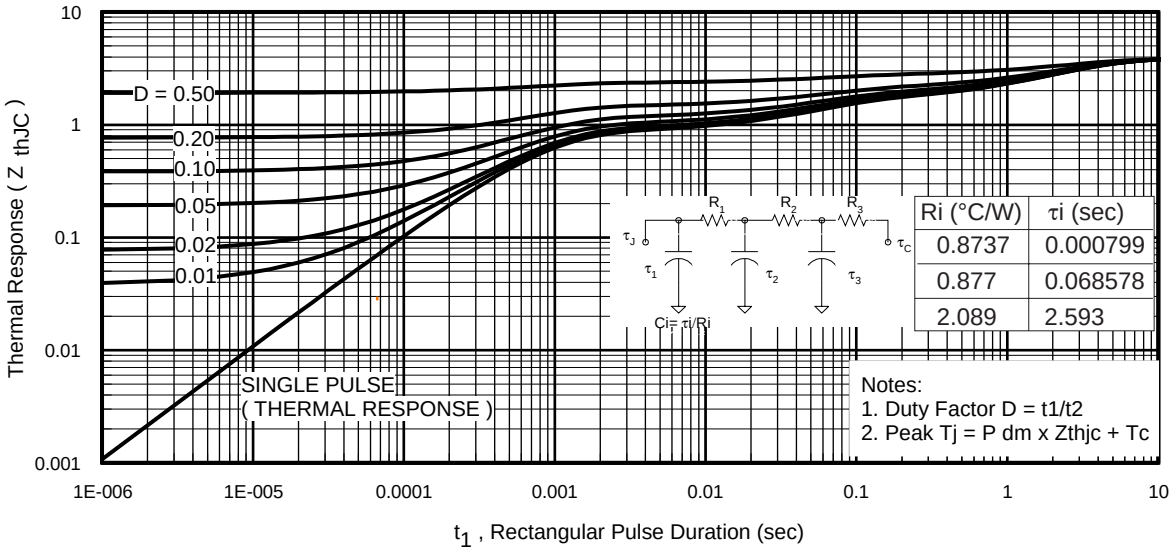


Fig 11. Maximum Effective Transient Thermal Impedance, Junction-to-Case

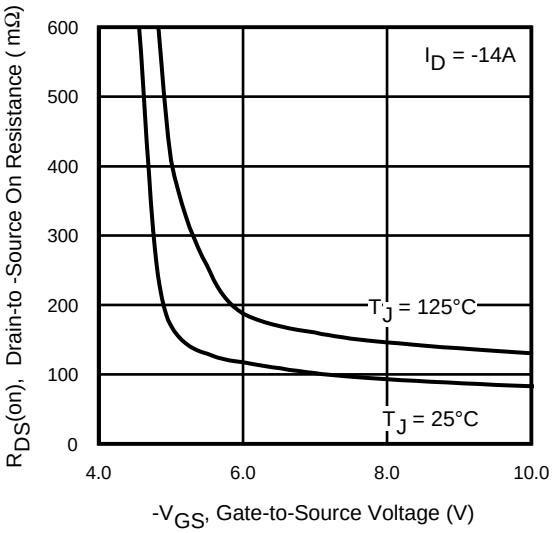


Fig 12. On-Resistance Vs. Gate Voltage

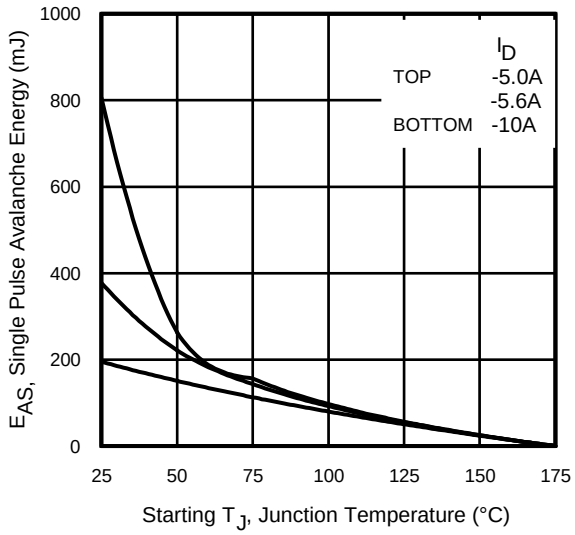


Fig 13. Maximum Avalanche Energy Vs. Drain Current

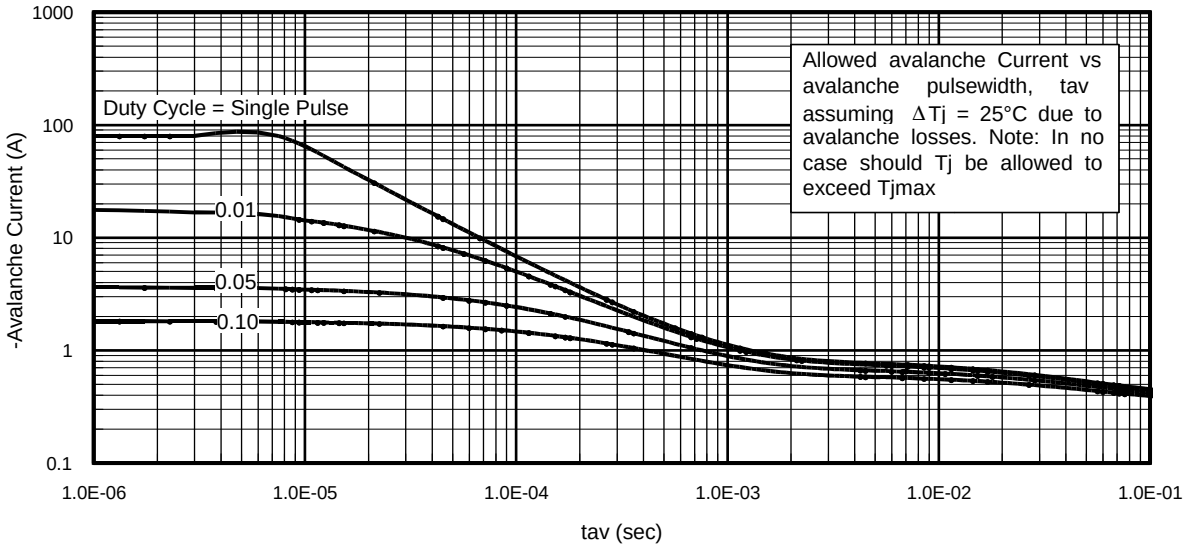


Fig 14. Typical Avalanche Current Vs.Pulsewidth

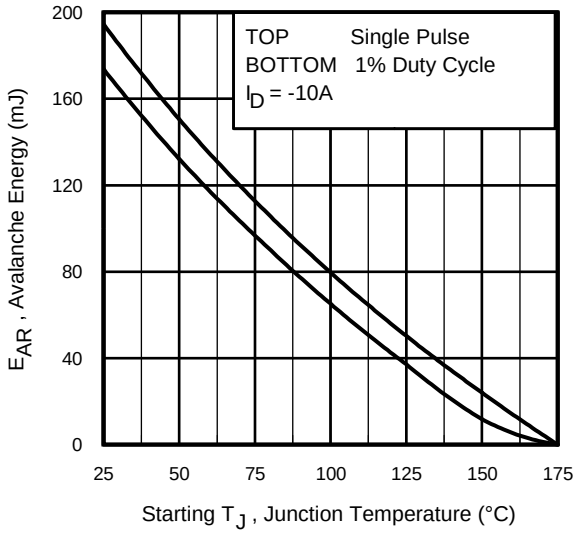


Fig 15. Maximum Avalanche Energy Vs. Temperature

Notes on Repetitive Avalanche Curves , Figures 14, 15:
(For further info, see AN-1005 at www.irf.com)

1. Avalanche failures assumption:
   Purely a thermal phenomenon and failure occurs at a temperature far in excess of T_{jmax}. This is validated for every part type.
2. Safe operation in Avalanche is allowed as long asT_{jmax} is not exceeded.
3. Equation below based on circuit and waveforms shown in Figures 17a, 17b.
4. $P_{D\ (ave)}$ = Average power dissipation per single avalanche pulse.
5. BV = Rated breakdown voltage (1.3 factor accounts for voltage increase during avalanche).
6. I_{av} = Allowable avalanche current.
7. ΔT = Allowable rise in junction temperature, not to exceed T_{jmax} (assumed as 25°C in Figure 14, 15).
   t_{av} = Average time in avalanche.
   D = Duty cycle in avalanche = $t_{av} \cdot f$
   $Z_{thJC}(D, t_{av})$ = Transient thermal resistance, see figure 11)

$$P_{D\ (ave)} = 1/2\ (1.3 \cdot BV \cdot I_{av}) = \Delta T / Z_{thJC}$$

$$I_{av} = 2\Delta T / [1.3 \cdot BV \cdot Z_{th}]$$

$$E_{AS\ (AR)} = P_{D\ (ave)} \cdot t_{av}$$

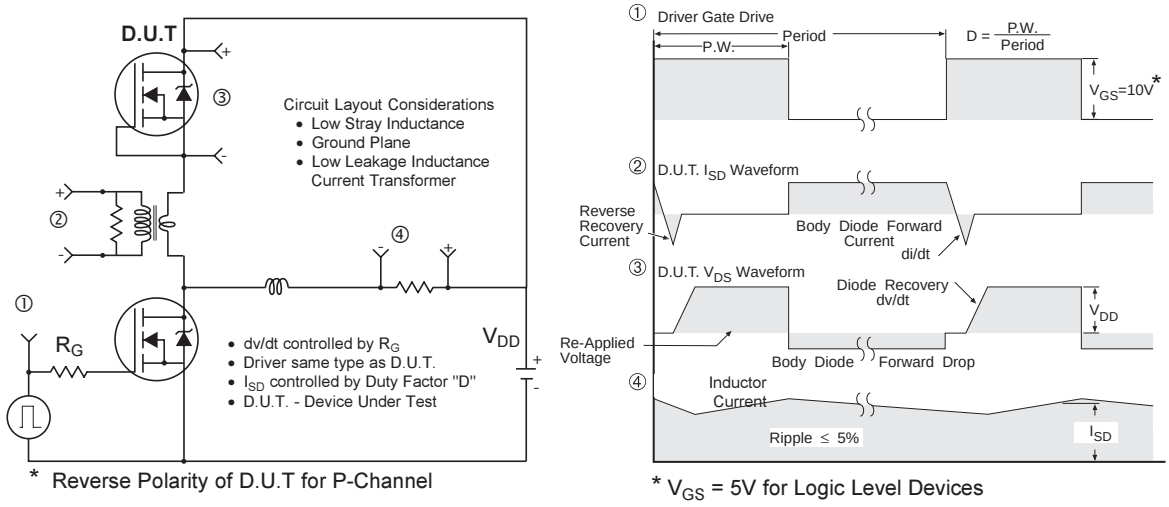


Fig 16. Peak Diode Recovery dv/dt Test Circuit for P-Channel
HEXFET® Power MOSFETs

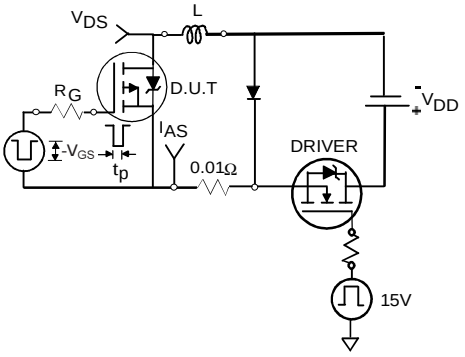


Fig 17a. Unclamped Inductive Test Circuit

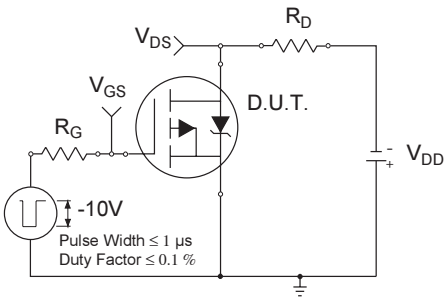


Fig 18a. Switching Time Test Circuit

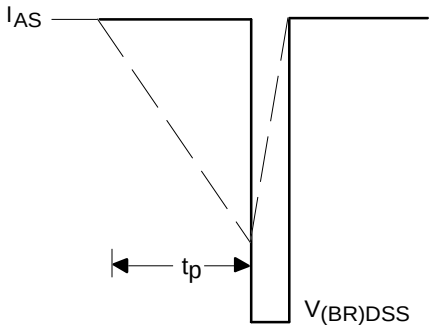


Fig 17b. Unclamped Inductive Waveforms

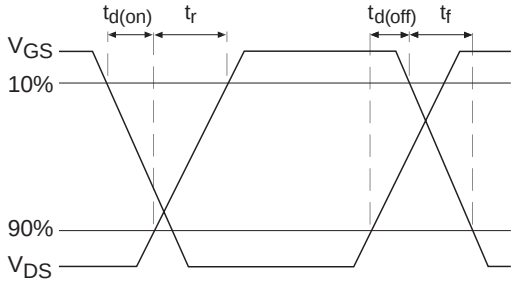


Fig 18b. Switching Time Waveforms

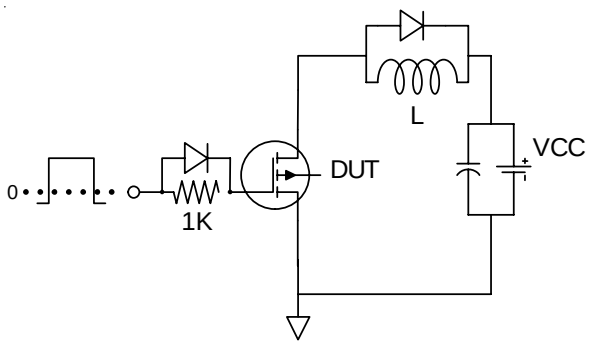


Fig 19a. Gate Charge Test Circuit


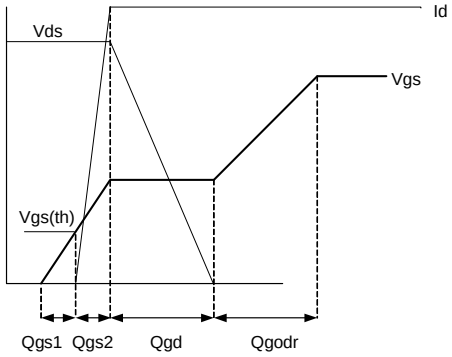


Fig 19b Gate Charge Waveform

TO-220 Full-Pak Package Outline


Dimensions are shown in millimeters (inches)

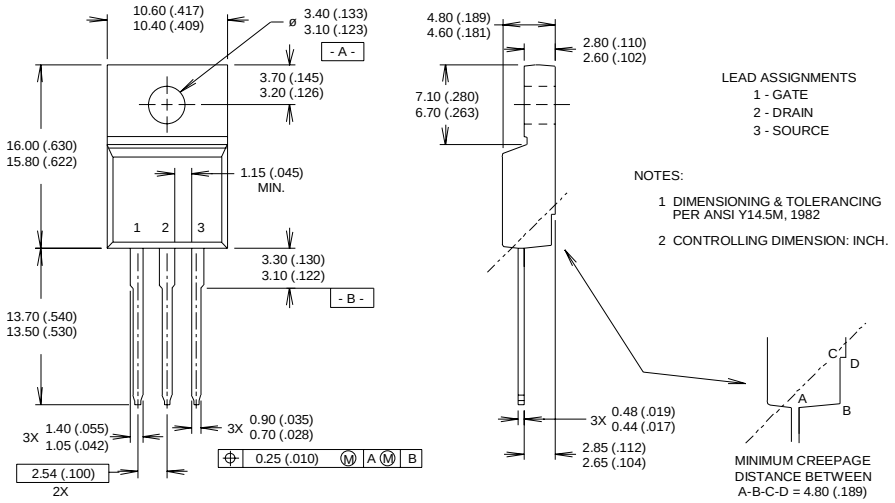

TO-220 Full-Pak Part Marking Information


Notes: This part marking information applies to all devices produced before 02/26/2001 and currently for parts manufactured in GB.

EXAMPLE: THIS IS AN IRFI840G
WITH ASSEMBLY
LOT CODE E401



Notes: This part marking information applies to devices produced after 02/26/2001 in location other than GB.

EXAMPLE: THIS IS AN IRFI840G
WITH ASSEMBLY
LOT CODE 3432
ASSEMBLED ON WW 24 1999
IN THE ASSEMBLY LINE "K"



TO-220 FullPak packages are not recommended for Surface Mount Application.

Notes:

① Repetitive rating; pulse width limited by max. junction temperature.

② Starting T_J = 25°C, L = 3.89mH, R_G = 25Ω, I_{AS} = -10A.

③ Pulse width ≤ 400µs; duty cycle ≤ 2%.

④ R_θ is measured at T_J of approximately 90°C.

⑤ Limited by Tjmax. See Figs. 14, 15, 17a, 17b for repetitive avalanche information

Data and specifications subject to change without notice.
This product has been designed for the Industrial market.
Qualification Standards can be found on IR's Web site.

International
IOR Rectifier

IR WORLD HEADQUARTERS: 233 Kansas St., El Segundo, California 90245, USA Tel: (310) 252-7105
TAC Fax: (310) 252-7903
Visit us at www.irf.com for sales contact information.4/04