



TDP SERIES


HIGH PERFORMANCE 3-PHASE 3-WIRE PLASTIC CASE FILTERS



COMPONENTS

PART NO.	L (mH)	Cx (uF)	Cy (uF)	R (MΩ)
04TDP6/(D)	40.0	0.22	0.068	1.0
06TDP6/(D)	23.0			
10TDP6/(D)	10.0			
16TDP6/(D)	4.3			
20TDP6/(D)	2.5			
30TDP6/(D)	1.2			
10TDP6E/(D)	46.3			
16TDP6E/(D)	25.3	0.22	0.068	1.0
20TDP6E/(D)	14.8			
30TDP6E/(D)	7.1			


ELECTRICAL SCHEMATIC

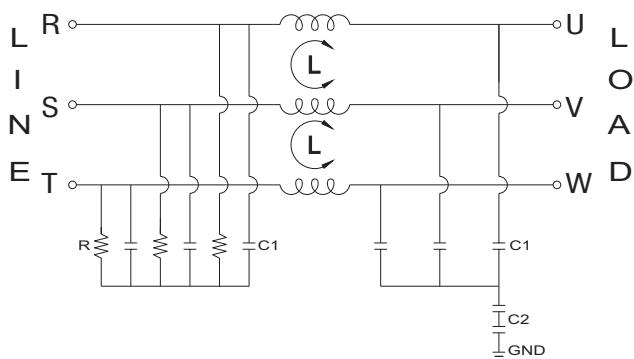

MECHANICAL CONSTRUCTION





TDP6, TDP6E

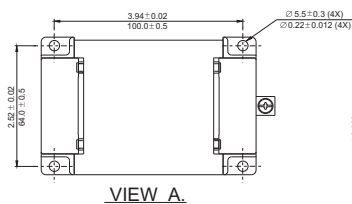


VIEW A.

VIEW A.


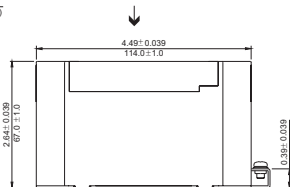


TDP6(D), TDP6E(D)



VIEW A.

VIEW A.



INTRODUCTIONS

1. Mainly industrial equipment, machinery, machine tools, robot arm controller and diverse process automation system.
2. Wide range of Y capacitance from 0 ~ 0.68uF for option.
3. Competitive design and easily connected with system.
4. Captive hinged protect cover.
5. Low leakage current models for option type for option.
6. Compacted size and DIN-rail installation.
7. RoHS compliant.

MINIMUM INSERTION LOSS IN dB

COMMONMODE(L-G)IN50OHMSYSTEM							
TYPE	CURRENT RATING	.15	.50	1.0	5.0	10	30
04TDP6/(D)	04A	50	50	60	45	30	10
06TDP6/(D)	06A	40	40	40	40	35	5
10TDP6/(D)	10A	35	40	40	30	20	5
16TDP6/(D)	16A	25	35	40	40	25	10
20TDP6/(D)	20A	20	35	35	35	25	5
30TDP6/(D)	30A	18	30	35	40	25	10
10TDP6E/(D)	10A	35	40	40	40	25	10
16TDP6E/(D)	16A	30	40	45	40	25	10
20TDP6E/(D)	20A	28	35	40	40	35	10
30TDP6E/(D)	30A	20	35	40	40	30	10
DIFFERENTIALMODE(L-L)IN50OHMSYSTEM							
04TDP6/(D)	04A	50	50	50	55	50	20
06TDP6/(D)	06A	55	50	50	55	55	15
10TDP6/(D)	10A	50	50	45	40	35	20
16TDP6/(D)	16A	40	50	50	45	45	25
20TDP6/(D)	20A	25	25	30	45	45	15
30TDP6/(D)	30A	30	40	40	45	40	20
10TDP6E/(D)	10A	45	45	60	50	50	20
16TDP6E/(D)	16A	40	45	55	50	45	20
20TDP6E/(D)	20A	40	55	60	55	50	20
30TDP6E/(D)	30A	30	45	50	45	45	30