
This document was generated on 05/27/2010

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: 0009524084
Status: Active
Overview: kk
Description: 3.96mm (.156") Pitch KK® Crimp Housing, Female, Friction Ramp, 8 Circuits

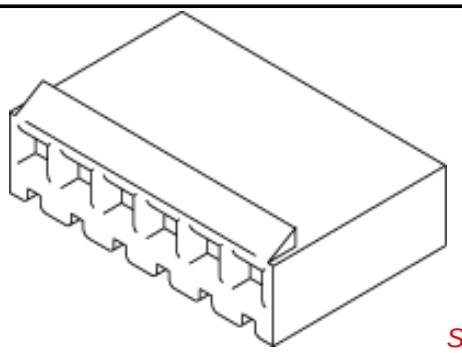

Series image - Reference only

Documents:

3D Model
Drawing (PDF)
Product Specification PS-5239-002 (PDF)
Product Specification PS-5239-003 (PDF)
Product Specification PS-5239-004 (PDF)
Product Specification PS-5239-005 (PDF)
Product Specification PS-5239-006 (PDF)
Product Specification PS-5239-007 (PDF)
Product Specification PS-5239-010 (PDF)
Product Specification PS-5239-011 (PDF)
RoHS Certificate of Compliance (PDF)

Agency Certification

TUV	R72090224

General

Product Family	Crimp Housings
Series	5239
Overview	kk
Product Name	KK®

Physical

Circuits (maximum)	8
Color - Resin	Natural
Flammability	94V-2
Gender	Female
Glow-Wire Compliant	No
Lock to Mating Part	Yes
Material - Resin	Nylon
Number of Rows	1
Packaging Type	Bag
Panel Mount	No
Pitch - Mating Interface (in)	0.156 In
Pitch - Mating Interface (mm)	3.96 mm
Polarized to Mating Part	Yes
Stackable	No
Temperature Range - Operating	-40°C to +105°C

Material Info

Old Part Number	5239-08

Reference - Drawing Numbers

Product Specification	PS-5239-002, PS-5239-003, PS-5239-004, PS-5239-005, PS-5239-006, PS-5239-007, PS-5239-010, PS-5239-011, RPS-5239-001
Sales Drawing	SD-5239-N

EU RoHS
ELV and RoHS Compliant
REACH SVHC
Contains SVHC: No
Halogen-Free Status
Not Reviewed

China RoHS

Need more information on product environmental compliance?

Email productcompliance@molex.com
For a multiple part number RoHS Certificate of Compliance, click here

Please visit the Contact Us section for any non-product compliance questions.


Search Parts in this Series
5239Series


Mates With
Right Angle PCB Header, 5274 5272 , Vertical PCB Header 5271 , 5273


Use With
5168 Cat Ear Crimp Terminals for 22-28 AWG, 5167 Cat Ear Crimp Terminals for 18-24 AWG, 2478 Crimp Terminal, 2578 Crimp Terminal

This document was generated on 05/27/2010

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

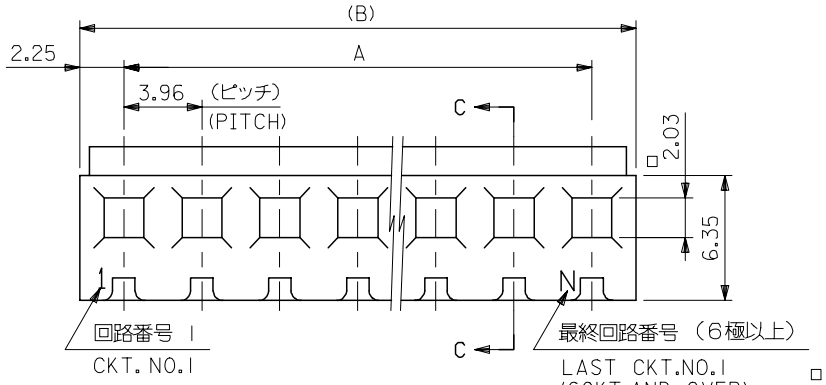

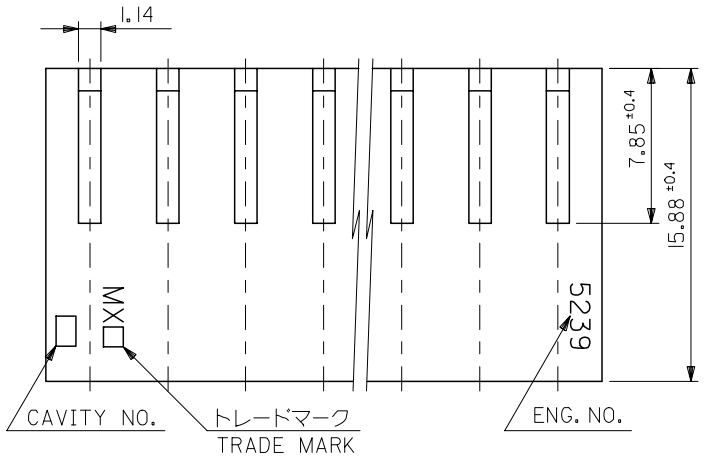

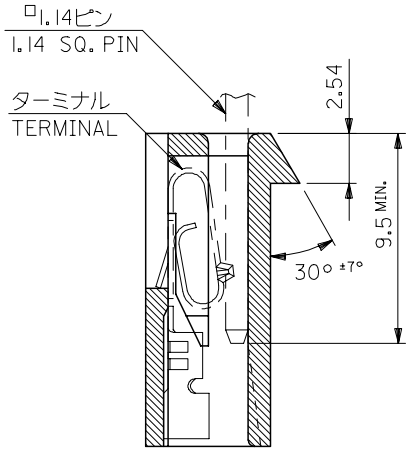

SECT. C-C

注記 NOTES

1. 適合ターミナル：2478,2578,5167,5168シリーズ
   APPLICABLE TERMINAL:2478,2578,5167,5168SERIES.
2. 反り：0.2/25.4 MAX.
   CAMBER:0.2/25.4MAX.

79.74	75.24 ±0.4	09-52-4204	5239-20	20
71.82	67.32 ±0.35	-4184	-18	18
67.86	63.36 ±0.3	-4174	-17	17
63.90	59.40 ±0.3	-4164	-16	16
59.94	55.44 ±0.3	-4154	-15	15
55.98	51.48 ±0.3	-4144	-14	14
52.02	47.52 ±0.3	-4134	-13	13
48.06	43.56 ±0.25	-4124	-12	12
44.10	39.60 ±0.25	-4114	-11	11
40.14	35.64 ±0.25	-4104	-10	10
36.18	31.68 ±0.2	-4094	-09	9
32.22	27.72 ±0.2	-4084	-08	8
28.26	23.76 ±0.2	-4074	-07	7
24.30	19.80 ±0.2	-4064	-06	6
20.34	15.84 ±0.15	-4054	-05	5
16.38	11.88 ±0.15	-4044	-04	4
12.42	7.92 ±0.15	-4034	-03	3
8.46	3.96 ±0.1	09-52-4024	5239-02	2
B	A	EDP NO.	ENG. NO.	極数 CKT.

MATERIAL
ナイロン66 UL94V-2
NYLON66 UL94V-2

REVISED
EC NO: J2006-3401 2006/07/19
DRWN:KSAITO01 2006/07/19
CHKD:MTANAKA
APPR:NUKITA 2006/07/20
REV DESCRIPTION

GENERAL TOLERANCES (UNLESS SPECIFIED)

10 UNDER	±0.2
10 OVER 30 UNDER	±0.25
30 OVER	±0.3
ANGULAR ±3 °	

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE: MM ONLY	SCALE: 4:1	DESIGN UNITS: METRIC	THIRD ANGLE PROJECTION
DRAWN BY: H.HIRAMOTO DATE: 1989/09/15	TITLE: KK 3.96 RECEPTACLE HSG		
CHECKED BY: S.A/ M.F DATE: 1996/04/10			
APPROVED BY: M.FUKUSHIMA DATE: 1996/04/10	MOLEX INCORPORATED		
MATERIAL NO.: SEE CHART	DOCUMENT NO.: SD-5239-N	SHEET NO.: 1 OF 1	
SIZE: A3	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION		