



A Tallysman Accutenna®

TW3882L GPS L1/L2 + GLONASS G1/G2/G3 + BeiDou B1/B2 + Galileo E1 + L-Band Service

The TW3882L employs Tallysman's unique *Accutenna* technology providing dual band GPS L1/L2, GLONASS G1/G2/G3 + BeiDou B1/B2 + Galileo E1/E5b plus L-Band correction services coverage and is especially designed for precision dual frequency positioning.

The TW3882L features a precision tuned, circular dual feed, stacked patch element. The signals from the two orthogonal feeds are combined in a hybrid combiner, amplified in a wide-band LNA, then band-split for narrow filtering in each band and further amplified prior to recombination at the output.


The TW3882L has a pre-filter which increases the antenna's immunity to high amplitude signals, such as LTW and other cellular signals. The TW3882L offers excellent axial ratio and a tightly grouped phase center variation.

The TW3882L is housed in a through-hole mount, weather-proof enclosure for permanent installations. L Bracket or Pipe Mount (part numbers 23-0040-0, 23-0065-0 respectively) are available for non-rooftop installation. A 100mm ground plane is recommended for non-roof-top installations.

This product is also available in an OEM format (TW3887L)



TW3882L Dimensions (mm)

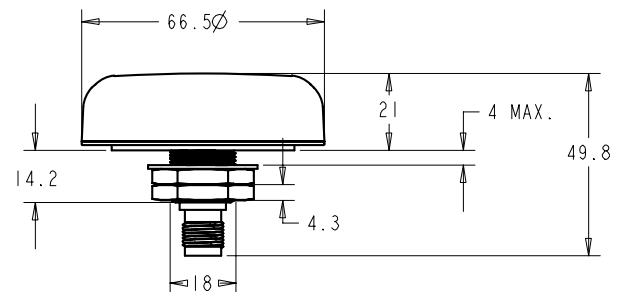

Applications

- Precision GPS position
- Dual Frequency RTK receivers
- Mission Critical GPS Timing
- Military & Security
- Network Timing and Synchronization

Features

- Very low Noise Preamp, < 2.5dB
- Axial ratio: <2dB typ.
- Tight Phase Center Variation
- LNA Gain 35 dB typ.
- Low current: 20 mA typ.
- ESD circuit protection: 15 KV
- Invariant performance from: +2.5 to 16VDC

Benefits

- Ideal for L1/L2 RTK surveying systems
- Great multipath rejection
- Increased system accuracy
- Great signal to noise ratio
- IP67, REACH, and RoHS compliant



TW3882L GPS L1/L2 + GLONASS G1/G2/G3 + BeiDou B1/B2 + Galileo E1 +L-Band Specifications

(Measured a Vcc = 3V, and Temperature=25°C)

Antenna

E5b/G3 Gain (100mm ground plane)	2.5dBic typ. at Zenith
B2 Gain (100mm ground plane)	3.0 dBic typ. at Zenith
L2 Gain (100mm ground plane)	4.0 dBic typ. at Zenith
G2 Gain (100mm ground plane)	2.5 dBic typ. at Zenith
E1 Gain (100mm ground plane)	4.0 dBic typ. at Zenith
L1 Gain (100mm ground plane)	4.0 dBic typ. at Zenith
G1 Gain (100mm ground plane)	2.5 dBic typ. at Zenith
Axial Ratio @zenith	
G3/E5b <1.5dB	B2 <1.5dB
L2 <1dB	G2 <1.5dB
L-band <1dB	
L1/E1/B1 <1dB	G1 <1.5dB

Electrical

Bandwidth	L2: 1189MHz-1261MHz (Filter bandwidth) L1: 1525 MHz-1610MHz (Filter bandwidth)			
Overall LNA Gain	35dB typ, 32 dB min, each of L1 and L2 Bands,			
Gain Variation with Temperature.	3dB max over operational temperature range			
LNA Noise Figure	2.5dB typ at 25°C			
VSWR (at LNA output)	<1.5:1			
Supply Voltage Range	+2.5 to 16VDC nominal, up to 50mV p-p ripple			
EMI Immunity	50V/Meter, excepting L1+/-100MHz and L2 +/- 100MHz			
Supply Current	20 mA typ. at 25°C, 25mA max at 75°C.			
ESD Circuit protection	15 KV air discharge.			
Out-of-Band Rejection	L1		L2	
	<1450 MHz	>30 dB	<1050 MHz	>50 dB
	>1690 MHz	>30 dB	<1100 MHz	>40 dB
	>1730 MHz	>45 dB	>1350 MHz	>50 dB

Mechanicals & Environmental

Mechanical Size, Ground Plane	66mm x 21mm (see drawing on other page), 100mm ground plane recommended
Operating Temperature Range	-40°C to +85°C
Enclosure	Radome: EXL9330, Base: Zamak White Metal
Weight	185 g
Attachment Method	Permanent 3/4" (19mm) through hole mount
Environmental	IP67, RoHS and REACH compliant
Shock	Vertical axis: 50 G, other axes: 30 G
Vibration	3 axis, sweep = 15 min, 10 to 200 Hz sweep: 3 G
Salt fog / spray	MIL-STD-810F Section 509.4

Ordering Information

TW3882L – GPS L1/L2 + GLONASS G1/G2/G3 + BeiDou B1/B2 + Galileo E1 +L-Band 33-3882L-xx-yy-zzzz

Where xx = connector type, yy = shape and colour of radome and zzzz = cable length in mm (where applicable)

Please refer to the Ordering Guide (<http://www.tallysman.com/wp-content/uploads/Current-Ordering-Guide.pdf>) for the current and complete list of available radomes and connectors.

Tallysman Wireless Inc

36 Steacie Drive

Ottawa ON K2K 2A9 Canada

Tel +1 613 591 3131

Fax 613 591 3121

sales@tallysman.com

The information provided herein is intended as a guide only and is subject to change without notice. This document is not to be regarded as a guarantee of performance. Tallysman Wireless Inc. hereby disclaims any or all warranties and liabilities of any kind. © 2010 Tallysman Wireless Inc. All rights reserved. Rev 1