Model:TE4121



Characteristics:

Sub-plate mount,Vacuum Epoxy Encapsulated,

Crimping terminal output.

Technical Index:

Technical Index：Sub-plate mount

Flame resistance ： UL94-V0

Insulation class：B

Operation temperature：-30℃～+40℃

Work frequency：50Hz～60Hz


Dielectric strength：3.75KV 50Hz 1min

Secondary voltage	Secondary no load voltage	Secondary full load current
6V	7.2V	1333mA
7.5V	9V	1066mA
9V	11.2V	888mA
12V	14.4V	666mA
15V	18V	533mA
18V	22.2V	444mA
24V	28.9V	333mA

Technical Parameters table:


Primary voltage	110/220/230	V
Primary voltage range	±10	%
Voltage regulation	≤18	%
Power	8	VA
Temperature rising	≤30	℃
No load loss	≤0.6	W
weight	220	g

Connector Illustration:

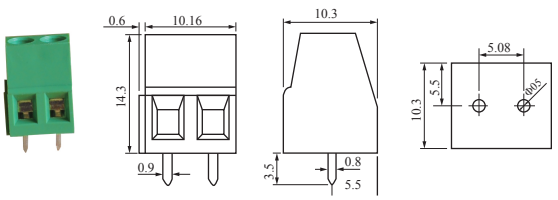


PCB direct welding crimp terminal,spacing5.08


Dimension（in mm）:

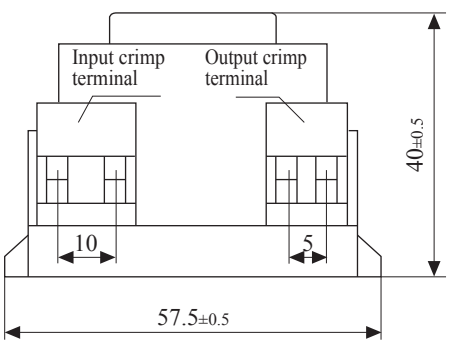

Front View

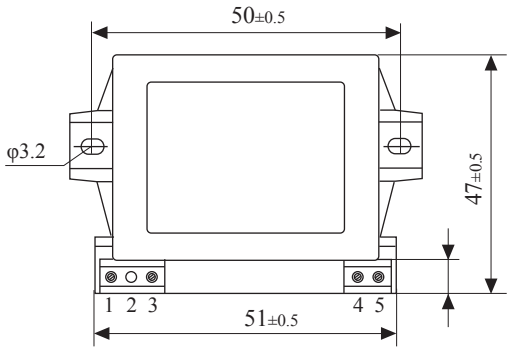

Top View

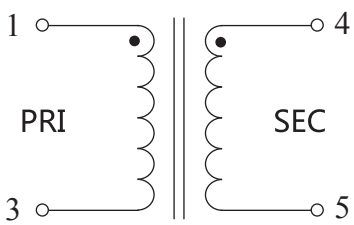

Schematic Diagram