


| REV. | DATE | ECR NO. | DESCRIPTION |
|------|----------|---------|-----------------|
| NC | 02/04/09 | - | INITIAL RELEASE |

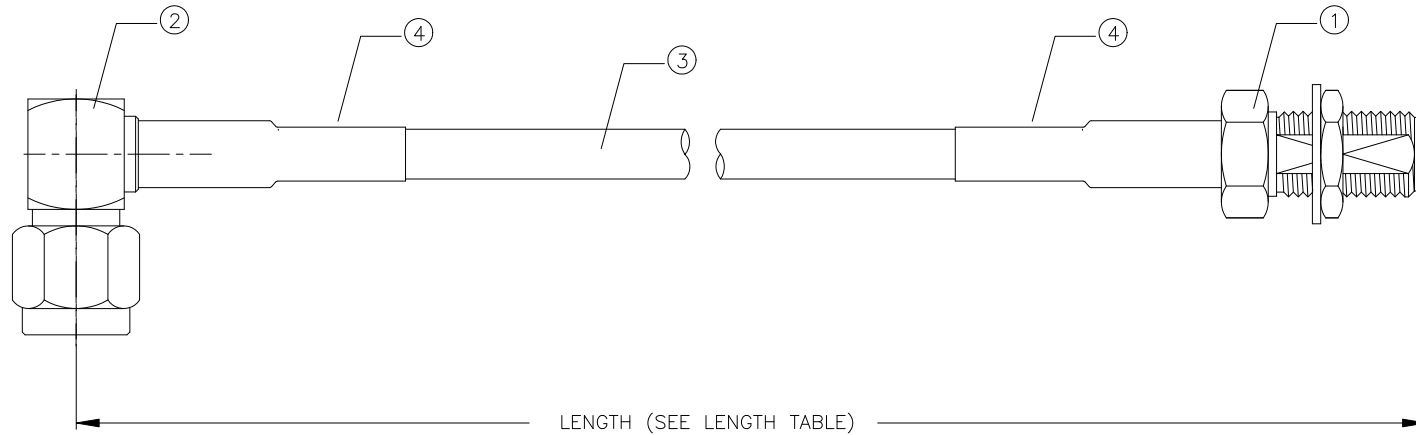

| LENGTH TABLE | |
|-----------------|--------------|
| PART NUMBER | LENGTH (IN.) |
| 135111-04-06.00 | 6.00 |
| 135111-04-12.00 | 12.00 |
| 135111-04-24.00 | 24.00 |
| 135111-04-36.00 | 36.00 |
| 135111-04-48.00 | 48.00 |

NOTE:

1. PERFORM CONTINUITY AND HI-POT TESTING.
2. PACKAGED INDIVIDUALLY IN HEAT SEALED POLY BAG.

| | | | |
|---|-------------|--|--------|
| 4 | 009-954-352 | HEAT SHRINK TUBING, BLACK, 3/8" DIAMETER | A/R FT |
| 3 | 009-881-377 | COAXIAL CABLE, RG58/U | A/R FT |
| 2 | 132122 | CONNECTOR, SMA R/A PLUG, GOLD | 1 |
| 1 | 132118 | CONNECTOR, SMA BULKHEAD JACK, GOLD | 1 |
| | PN | DESCRIPTION | QTY |

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN MILLIMETERS. DIMENSIONS IN [] ARE IN INCHES AND FOR CUSTOMER REFERENCE ONLY.

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR MILLIMETERS ARE:
0.5 - 8mm ± 0.20mm
8 - 30mm ± 0.40mm
30 - 120mm ± 0.50mm

UNLESS OTHERWISE SPECIFIED TOLERANCES FOR INCHES ARE:
.020 - .315 = ± 0.007"
.315 - 1.180 = ± 0.015"
1.180 - 4.724 = ± 0.020"

DO NOT SCALE DRAWING

| APPROVALS | DATE |
|--------------|----------------------------|
| DRAWN G.R.S. | 02/04/09 |
| CHECKED | |
| ISSUED | |
| SHEET 1 OF 1 | |
| CAD FILE | C:/135/135111-04-XX.XX.DWG |

Amphenol Connex

PART DESCRIPTION

SMA R/A PLUG TO SMA BULKHEAD JACK
RG58

PART NO.

135111-04-XX.XX

DWG. NO.

135111-04-XX.XX.DWG

REV. NC

SIZE A

SCALE NA